



RELATIVE HUMIDITY MODULE


HM1520LF

Compliant with RoHS recommendations

Based on the rugged HS1101LF capacitive humidity sensor, HM1520LF is a dedicated humidity transducer designed for measurements at low humidity. Direct measurement of dew point or water concentration can be easily obtained in really cost effective conditions. Direct interface with a micro-controller is made possible with the module's linear voltage output.

MAIN FEATURES

- Tubular form for through wall mounting
- Product free from Lead, Cr(6+), Cd and Hg
- Not affected by water condensation
- Full interchangeability
- **Typical 1 to 1.6 Volt DC output for 0 to 20% RH at 5 V DC supply**
- Calibrated, linear voltage for easy electronic interface
- Controlled temperature dependency
- Ratiometric to voltage supply




HUMIDITY SENSOR SPECIFIC FEATURES

- No affected by long period at low humidity values
- Patented solid polymer structure
- High resistance to chemical
- Fast response time

MAXIMUM RATINGS

Ratings	Symbol	Value	Unit
Storage Temperature	Tstg	-30 to 70	°C
Storage Humidity Range	RHstg	0 to 100	% RH
Supply Voltage (Peak)	Vs	10	Vdc
Humidity Operating Range	RH	0 to 100	% RH
Temperature Operating Range	Ta	-40 to 60	°C

Accuracy of HM1520LF when used from 1 to 95%RH

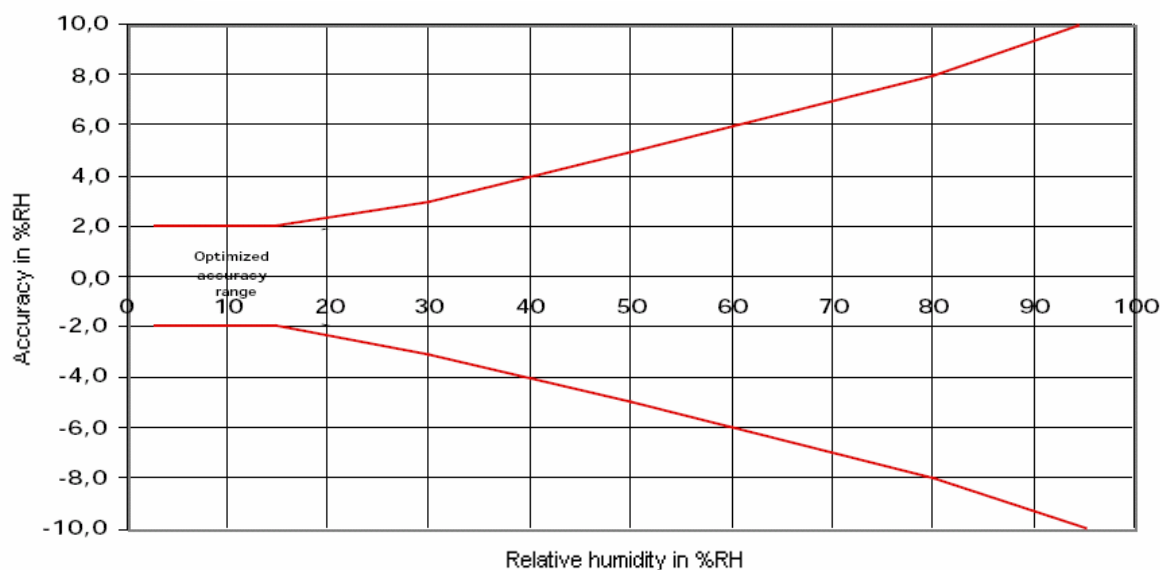


CHARACTERISTICS

($V_S=5.0V_{dc}$, $R_L > 1M\Omega$ unless otherwise stated)

Characteristics	Symbol	Min	Typ	Max	Unit
Humidity measuring range / T_a -40 to 60°C	RH	0		100	%RH
Relative Humidity Accuracy (1-20%) at 23°C			± 2	± 3	%RH
Relative Humidity Accuracy at 55% RH at 23°C			± 5		%RH
Voltage Supply (regulated at 5Vdc)*	V_{CC}	4.75	5	5.25	V_{dc}
Nominal Output @10%RH / T_a 25°C	V_{out}	1.17	1.24	1.31	V
Current Consumption	I_{CC}		2.8	4	mA
Temperature coefficient (10 to 50°C and 1 to 20%RH)	T_{CC}		-0.05	-0.1	%RH/°C
Humidity Average Sensitivity from 5% to 10% RH	$\Delta mV/RH$		+26		mV/%RH
Response time (at 63% of signal) from 5% to 10% RH	τ			10	s
Humidity Hysteresis				+/-1	%RH
Output impedance	Z		70		Ω
Sink current capability ($R_L = 33 k\Omega$)	I_S			150	μA
Warm up time (electronic)	t_w		150		ms
Humidity Resolution			0.4		%RH
Long Term Stability			0.5		%RH/Yr

*Maximal power supply ramp up time to V_{CC} should be less than 4 ms.

HM1520LF Preliminary Specification when used from 1 to 30%RH

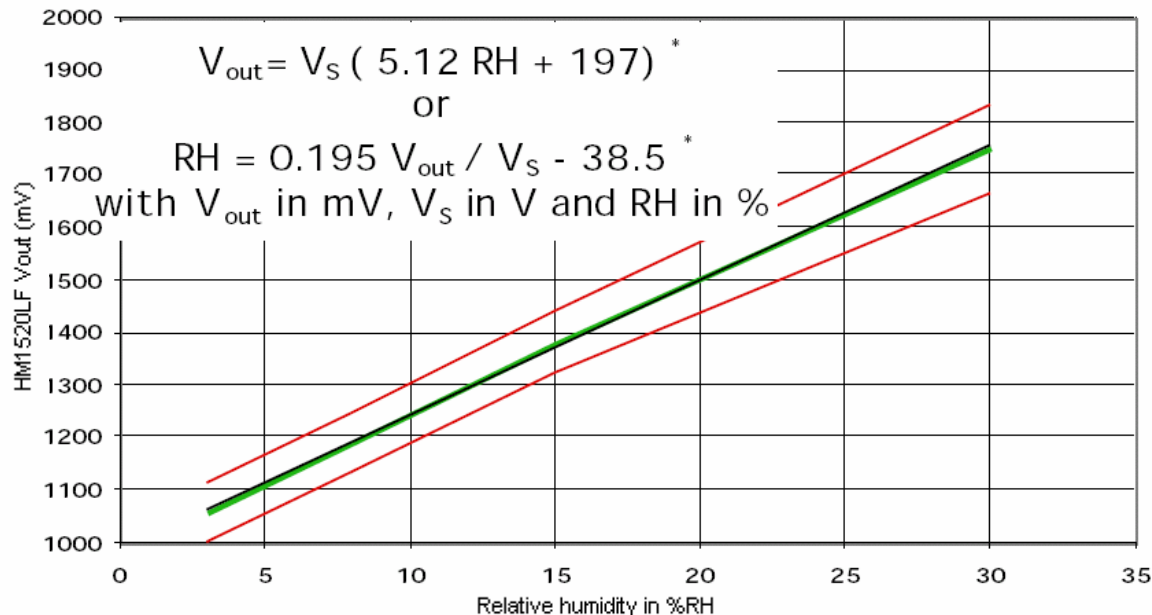

- Those equations can be used above 30% RH and allow to obtain an over all accuracy as described in page one of this document in all the humidity measuring range
- Temperature (in the range 0 to 50°C) does not affect HM1520LF measurement when used from 1 to 30% RH. No temperature compensation is required.

Signal output from 1 to 20% RH at 23°C :

RH(%)	1	2	3	4	5	6	7	8	9	10
Vout(mV)	1013	1038	1064	1089	1115	1141	1166	1192	1217	1243
RH(%)	11	12	13	14	15	16	17	18	19	20
Vout(mV)	1269	1294	1320	1346	1371	1397	1422	1448	1474	1499

With Vs = 5.0 Volts DC

Calibration data are **traceable to NIST** standards through CETIAT laboratory.

IMPORTANT NOTICE : HM1520LF is based on HS1101LF capacitive sensor and thus is fully useable on a large range of relative humidity (1 to 99% RH). In that range, HM1520LF presents a typical accuracy of +/-5% RH at 55% RH.)

However HM1520LF is a dedicated module for humidity measurements at low Relative Humidity levels.

Thus, HM1520LF is also well adapted to measure water concentrations (ppm) or low dew points when associated with an ambient temperature probe.

HM1520LF features an optimized accuracy for **water concentration below 6000 ppm water or 0°C dew point at 23°C** (equivalent to 20% RH).

TYPICAL OUTPUT of HM1520LF when measuring water concentration at ambient temperature of 23°C :

ppm	275	550	825	1100	1375	1650	1925	2200	2470	2750
Vout(mV)	1013	1038	1064	1089	1115	1141	1166	1192	1217	1243
ppm	3025	3300	3570	3850	4120	4395	4670	4945	5220	5495
Vout(mV)	1269	1294	1320	1346	1371	1397	1422	1448	1474	1499

$$\text{ppm}_{\text{water}} = 10.75 V_{\text{out}} - 10615 \text{ with } V_{\text{out}} \text{ in mVolts}$$

TYPICAL OUTPUT of HM1520LF when measuring dew point at ambient temperature of 23°C :

°C	-36	-29	-24	-21	-18.5	-16	-14.5	-13	-11.5	-10
Vout(mV)	1013	1038	1064	1089	1115	1141	1166	1192	1217	1243
°C	-9	-7.8	-6.8	-5.8	-4.9	-4.1	-3.2	-2.5	-1.6	-1.1
Vout(mV)	1269	1294	1320	1346	1371	1397	1422	1448	1474	1499


RESISTANCE TO PHYSICAL AND CHEMICAL STRESS

- HM1520LF has passed through qualification processes of HUMIREL including vibration, shock, storage, high temperature and humidity, ESD.
- Additional tests under harsh chemical conditions demonstrate good operation in presence of salt atmosphere, SO₂(0.5%), H₂S (0.5%), O₃, NO_x, NO, CO, CO₂, Softener, Soap, Toluene, acids (H₂SO₄, HNO₃, HCl), HMDS, Insecticide, Cigarette smoke, a non exhaustive list.
- HM15200LF is not light sensitive.

SPECIFIC PRECAUTIONS

- HM1520LF is protected against reversed polarity.
- If you wish to use HM1520LF in a chemical atmosphere not listed above, consult us.

PACKAGE OUTLINE

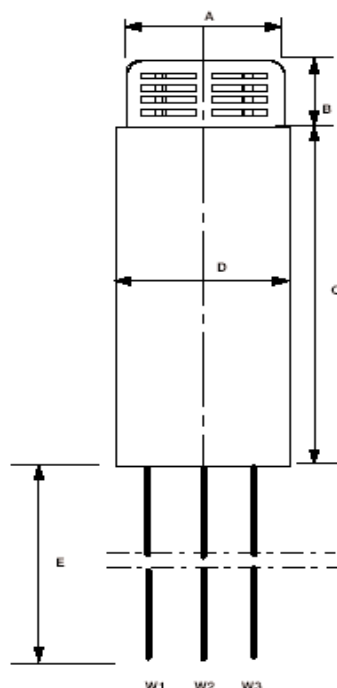

** Specific length available on request*

Dim	Min (mm)	Max (mm)
A	9.75	10.25
B	4.00	4.50
C	53	55
D	10.9	11.4
E*	200	250

Wire	Color	Function
W1	White	GROUND
W2	Blue	SUPPLY VOLTAGE
W3	Yellow	OUTPUT VOLTAGE

ORDERING INFORMATION (MULTIPLE PACKAGE QUANTITY OF 10 PARTS)
HM1520LF: HUMIDITY ANALOG VOLTAGE OUTPUT MODULE
ORDERING REFERENCE: HPP805C031

**SAMPLE KIT OF HM1520LF
IS AVAILABLE THROUGH
HUMIREL WEB SITE**

www.humirel.com
email : sales@humirel.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Humirel reserves the right to make changes without further notice to any product herein. Humirel makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Humirel assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. « Typical » parameters can and do vary in different applications. All operating parameters, including « Typical » must be validated for each customer applications by customer's technical experts. Humirel does not convey any license under its patent rights nor the rights of others. Humirel products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other application intended to support or sustain life, or for any application in which the failure of the Humirel product could create a situation where personal injury or death may occur. Should buyer purchase or use Humirel products for any such unintended or unauthorized application, Buyer shall indemnify and hold Humirel and its officers, employees, subsidiaries, affiliates and distributors harmless against all claims, costs, damages and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Humirel was negligent regarding the design or manufacture of the part. Humirel is a registered trade mark of Humirel.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331