

G3VM-21PR11

MOS FET Relays

Smallest Class in market, USOP High-power, 0.9A Switching in a 20V Load Voltage Model

- Dielectric strength of 500Vrms between I/O.



NEW

Note: The actual product is marked differently from the image shown here.



RoHS Compliant

⚠ Refer to "Common Precautions".

Application Examples

- Semiconductor test equipment
- Test & measurement equipment
- Communication equipment
- Data loggers

Terminal Arrangement/Internal Connections



Note: The actual product is marked differently from the image shown here.

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) (See note.)	Model	Minimum package quantity
					Number per tape & reel
USOP4	1a (SPST-NO)	Surface-mounting terminals	20V	G3VM-21PR11	-
				G3VM-21PR11 (TR05)	500
				G3VM-21PR11 (TR)	1,500

- Note 1. Ask you OMRON representative for orders under 1,500 pcs or 500 pcs.
 2. Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them. Refer to common precautions.
 3. The AC peak and DC value is given for the load voltages.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions	
Input	LED forward current	IF	50	mA	
	LED forward current reduction rate	$\Delta I_F / ^\circ C$	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	VR	5	V	
	Connection temperature	TJ	125	°C	
Output	Load voltage (AC peak/DC)	VOFF	20	V	
	Continuous load current (AC peak/DC)	Io	900	mA	
	ON current reduction rate	$\Delta I_o / ^\circ C$	-12	mA/°C	Ta ≥ 50°C
	Pulse ON current	Iop	2700	mA	t=100ms, Duty=1/10
Connection temperature	TJ	125	°C		
Dielectric strength between I/O (See note 1.)	VI-O	500	Vrms	AC for 1 min	
Ambient operating temperature	Ta	-40~+85	°C	With no icing or condensation	
Ambient storage temperature	Tstg	-40~+125	°C	With no icing or condensation	
Soldering temperature	-	260	°C	10s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	VF	1.0	1.15	1.3	V	IF=10mA
	Reverse current	IR	-	-	10	μA	VR=5V
	Capacity between terminals	CT	-	15	-	pF	V=0, f=1MHz
	Trigger LED forward current	IFT	-	0.6	3	mA	Io=100mA
Output	Maximum resistance with output ON	RON	-	0.18	0.22	Ω	IF=5mA, Io=900mA, t<1s
	Current leakage when the relay is open	I _{LEAK}	-	-	1	nA	VOFF=20V, Ta=25°C
	Capacity between terminals	COFF	-	40	-	pF	V=0, f=100MHz, t<1s
Capacity between I/O terminals	CI-O	-	0.4	-	pF	f=1MHz, Vs=0V	
Insulation resistance between I/O terminals	RI-O	1000	-	-	MΩ	VI-O=500VDC, RoH≤60%	
Turn-ON time	tON	-	0.5	2	ms	IF=5mA, RL=200Ω	
Turn-OFF time	tOFF	-	0.1	1	ms	VDD=10V (See note 2.)	

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V _{DD}	-	-	16	V
Operating LED forward current	I _F	5	7.5	20	mA
Continuous load current (AC peak/DC)	I _O	-	-	900	mA
Ambient operating temperature	T _a	-20	-	65	°C

Engineering Data


LED forward current vs. Ambient temperature




Continuous load current vs. Ambient temperature




LED forward current vs. LED forward voltage




Continuous load current vs. On-state voltage




On-state resistance vs. Ambient temperature




Trigger LED forward current vs. Ambient temperature




Turn ON, Turn OFF time vs. LED forward current




Turn ON, Turn OFF time vs. Ambient temperature



Current leakage vs. Load voltage

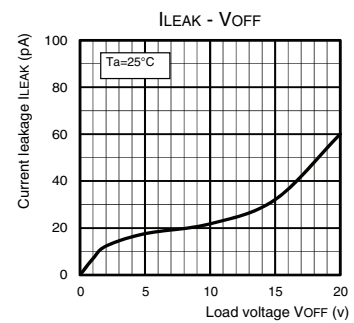

Output terminal capacitance COFF/COFF(ov) vs. Load voltage




Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance

USOP (Ultra Small Outline Package)
USOP4



Note: The actual product is marked differently from the image shown here.




■ Dimensions

(Unit: mm)




Surface-mounting Terminals

Weight: 0.03g



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331