


VARIMETER Standstill Monitor BD 5936

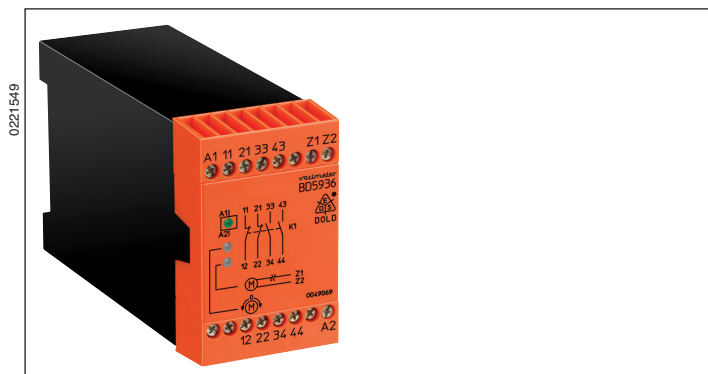

Your Advantage

- Standstill monitoring without sensor

Features

- According to IEC/EN 60255-1, IEC/EN 60255-26
- For standstill monitoring of 3- and 1-phase asynchronous motors
- Line breakage detection in the measurement circuit
- Forcibly guided output contacts:
2 NO, 2 NC contacts for 250 V AC
- LED indicators for motor standstill, line breakage, and operating voltage
- Wire connection: also 2 x 1.5 mm² stranded ferruled (isolated),
DIN 46 228/-1/-2/-3/-4 or
2 x 2.5 mm² stranded ferruled DIN 46 228-1/-2/-3
- Width 45 mm

Product Description

The BD 5936 detecting standstills of 3- and 1-phase asynchronous motors. At 2 terminals of the stator winding the BD 5936 measures the voltage of the slowing motor which has been induced.. If the induction voltage approaches 0 this indicates that the device is at a standstill and the output relay is activated.

Additional the monitor detects strand breaks between measurement inputs Z1 / Z2.. If a line breakage is detected, the output relay goes into the normal position (as when the motor is running). This state is saved and can only be cleared by (briefly) switching off the auxiliary voltage.

Approvals and Markings




* see variants

Applications

For detecting standstills of 3- and 1-phase asynchronous motors, for example, for releasing protective door interlocks of machine tools or for activating stopping brakes.

Function Diagram

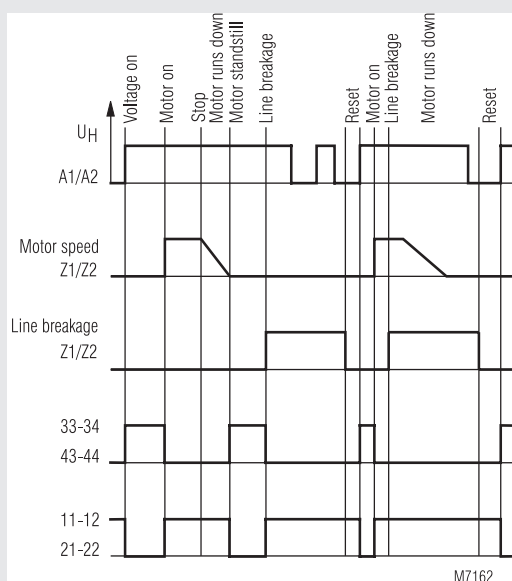

Notes

In the case on the motor wires the Z1 / Z2 connection wire should be installed separately from the motor supply and connected directly to the motor terminals. For longer distances please use twisted pair wires.


Indicators

- 1st green LED: comes on when operating voltage present
- 2nd green LED: comes on when motor at a standstill
- Red LED: comes on in event of line breakage between Z1 and Z2

Connection Terminals

Terminal designation	Signal designation
A1, A2	Auxiliary voltage U_H
Z1, Z2	Measuring input (connection on motor)
11, 12, 21, 22	Forcibly guided NC contacts
33, 34, 43, 44	Forcibly guided NO contacts

Circuit Diagrams



Technical Data

Input

- Auxiliary voltage U_H :** AC 24, 48, 110, 120, 230 V, AC/DC 24 ... 60 V, 110 ... 230 V (other voltages on request)
- Voltage range:** 0.8 ... 1.1 U_N
- Nominal consumption:** approx. 3 VA, 3 W
- Nominal frequency:** 50 / 60 Hz
- Measurement/motor voltage:** AC 690 V
- Response value:** approx. 20 mV
- Release value:** approx. 40 mV

Technical Data	
Output	
Contacts	
BD 5936.17:	2 NO, 2 NC contacts
Contact type:	relay, forcibly guided
Output rated voltage:	250 V AC
Thermal current I_{th}:	5 A
Switching capacity	IEC/EN 60 947-5-1
to AC 15:	
NO contact:	3 A / AC 230 V
NC contact:	2 A / AC 230 V
Electrical life	IEC/EN 60 947-5-1
to AC 15 at 2 A, AC 230 V:	10 ⁵ switching cycles
Short circuit strength	
max. fuse rating:	6 A gL IEC/EN 60 947-5-1
Mechanical life:	10 x 10 ⁶ switching cycles

General Data

Operating mode:	Continuous operation
Temperature range:	- 15 ... + 55 °C at max. 90 % air humidity

Clearance and creepage distances

rated impulse voltage / pollution degree, Terminals Z1/Z2:	IEC 60 664-1
at AC-Auxiliary voltage U_H :	6 kV / 2 (Overvoltage category III)
at AC/DC-Auxiliary voltage U_H :	4 kV / 2 (Overvoltage category II)

EMC

Electrostatic discharge:	8 kV (air)	IEC/EN 61 000-4-2
HF irradiation:	10 V/m	IEC/EN 61 000-4-3
Fast transients:	2 kV	IEC/EN 61 000-4-4

Surge voltages

between wires for power supply:	2 kV	IEC/EN 61 000-4-5
between wire and ground:	4 kV	IEC/EN 61 000-4-5
HF-wire guided	10 V	IEC/EN 61 000-4-6

Interference suppression

Auxiliary voltage AC:	Limit value class B	EN 55 011
Auxiliary voltage AC/DC:	Limit value class A*)	EN 55 011

*) The device is designed for the usage under industrial conditions (Class A, EN 55011).
When connected to a low voltage public system (Class B, EN 55011) radio interference can be generated. To avoid this, appropriate measures have to be taken.

Degree of protection:

Housing:	IP 40	IEC/EN 60 529
Terminals:	IP 20	IEC/EN 60 529

Housing:

Thermoplastic with V0 behaviour to UL Subj. 94

Vibration resistance:

Amplitude 0,35 mm
frequency 10 ... 55 Hz IEC/EN 60 068-2-6
15 / 055 / 04 IEC/EN 60 068-1

Climate resistance:

EN 50 005

Terminal designation:

Wire connection:

1 x 4 mm² solid or
1 x 2.5 mm² stranded ferruled (isolated) or
2 x 1.5 mm² stranded ferruled (isolated)
DIN 46 228-1/-2/-3/-4 or
2 x 2.5 mm² stranded ferruled
DIN 46 228-1/-2/-3

Line attachment:

Plus-minus terminal screws M 3,5 box terminal with wire protection

Mounting:

DIN rail IEC/EN 60 715

Weight:

325 g

Dimensions

Width x height x depth:	45 x 74 x 121 mm
--------------------------------	------------------

UL-Data	
Switching capacity:	
NO contacts:	Pilot duty A300 10A 250Vac G.P. 10A 24Vdc
NC contacts:	10A 250Vac G.P. 10A 24Vdc
Info Technical data that is not stated in the UL-Data, can be found in the technical data section.	

CCC-Data	
Thermal current I_{th}:	5 A
Switching capacity	
to AC 15:	2 A / AC 230 V IEC/EN 60 947-5-1
to DC 13:	1 A / DC 24 V IEC/EN 60 947-5-1


Info Technical data that is not stated in the CCC-Data, can be found in the technical data section.	
--	--

Standard Type	
BD 5936.17/001	AC 230 V 50/60 Hz
Article number:	0049069
• Output:	2 NO, 2 NC contacts
• Auxiliary voltage U_H :	AC 230 V
• With automatic reset for broken wire detection	
• Width:	45 mm

Variants	
BD 5936.17:	without automatic reset for broken wire detection
BD 5936.17/61:	with UL-approval (Canada/USA)
BD 5936:	with CCC-approval on request

Ordering example for variants

BD 5936	.17	/	—	AC 230 V	50 / 60 Hz	
						Nominal frequency
						Auxiliary voltage
						Variant, if required
						Contacts
						Type

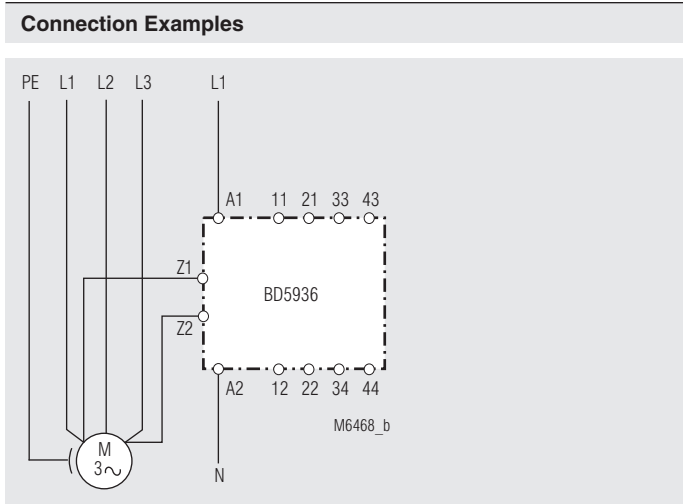



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331