

TO-92S



Pin Definition:

1. V_{CC}
2. GND
3. Output

Description

TSH481 is a linear Hall-effect sensor which is composed of Hall sensor, linear amplifier and Totem-Pole output stage. It features low noise output, which makes it unnecessary to use external filtering. It also can provide increased temperature stability and accuracy. The linear Hall sensor has a wide operating temperature range of -40°C to $+105^{\circ}\text{C}$, appropriate for commercial, consumer, and industrial environments.

The high sensitivity of Hall-effect sensor accurately tracks extremely weak changes in magnetic flux density. The linear sourcing output voltage is set by the supply voltage and in proportion of variation of the magnetic flux density. Typical operation current is 2.5mA and operating voltage range is 3.0V to 6.5V

Features

- Operating Voltage Range: 3.0V~6.5V
- Low-Noise Operation
- Linear output for circuit design flexibility
- Totem-Pole for a stable and accurate output
- Responds to either positive or negative magnetic flux density
- Robust ESD performance

Ordering Information

Part No.	Package	Packing
TSH481CT B0G	TO-92S	1kpcs / Bulk Bag

Note: "G" denote for Halogen Free Product

Application


- Current sensing
- Motor control
- Position sensing
- Magnetic code reading
- Rotary encoder
- Ferrous metal detector
- Vibration sensing
- Liquid level sensing
- Weight sensing

Absolute Maximum Ratings ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)


Characteristics	Limit	Value	Unit
Supply voltage	V_{CC}	8	V
Reverse voltage	V_{CC}	-0.5	V
Magnetic flux density		Unlimited	G
Output current	I_{OUT}	10	mA
Operating Temperature Range	T_{OPR}	-40 to $+85$	$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-65 to $+150$	$^{\circ}\text{C}$
Maximum Junction Temp	T_J	150	$^{\circ}\text{C}$
Thermal Resistance - Junction to Ambient	$R\theta_{JA}$	206	$^{\circ}\text{C/W}$
Thermal Resistance - Junction to Case	$R\theta_{JC}$	148	$^{\circ}\text{C/W}$
Package Power Dissipation	P_D	606	mW

Note: Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute maximum-rated conditions for extended periods may affect device reliability.

Block Diagram

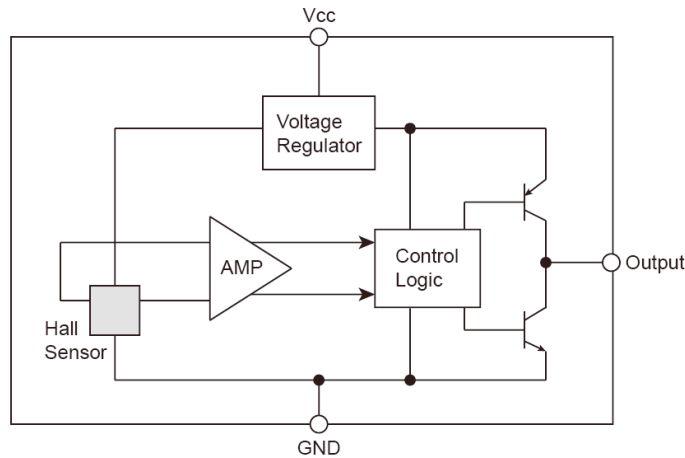

Typical Application Circuit

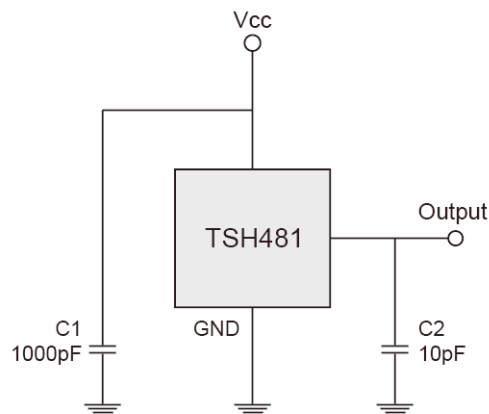


Electrical Specifications (DC Operating Parameters: $T_A=+25^{\circ}\text{C}$, $V_{CC}=5\text{V}$)

Parameters	Test Conditions	Min	Typ	Max	Units
Supply Voltage	Operating	3.0	--	6.5	V
Supply Current	B=0 G	--	2.5	5.0	mA
Output Current	$V_{CC}>3\text{V}$	1.0	1.5	--	mA
Null Output Voltage	B=0 G	2.3	2.5	2.7	V
Output Bandwidth		--	20	--	kHz
Output Voltage Span		2.95	3.2	--	V
Magnetic Range Gauss		± 500	± 800	--	G
Linearity	% of Span	--	0.7	--	
Response Time		--	3	--	μs
Sensitivity		1.8	--	2.2	mV/G
Electro-Static Discharge	HBM	3	--	--	kV

Note: 1G (Gauss) = 0.1mT (millitesla)

Output Behavior versus Magnetic Pole

DC Operating Parameters: $T_A = +25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$

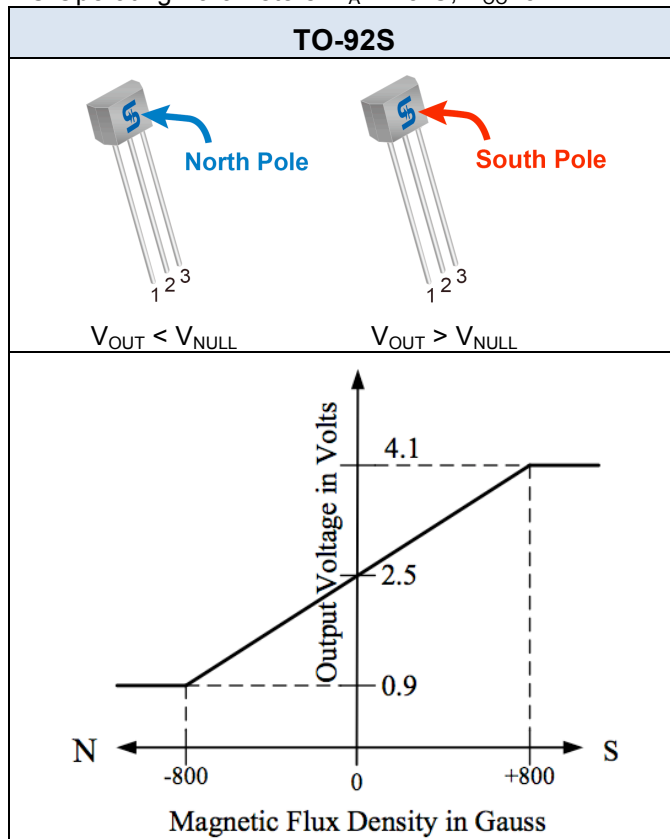

Characteristic Performance

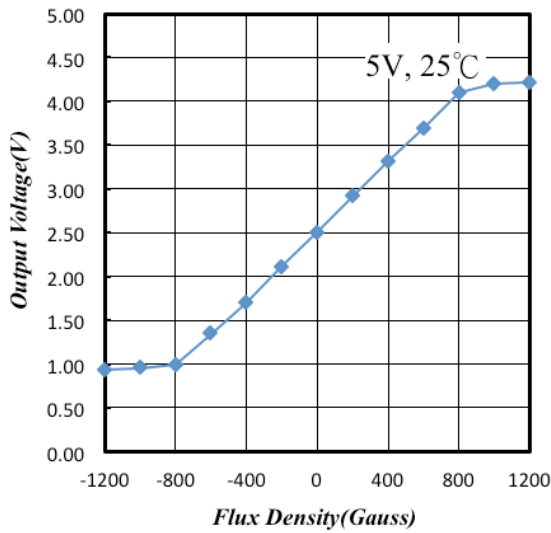


Figure 1. Output Voltage vs. Flux Density

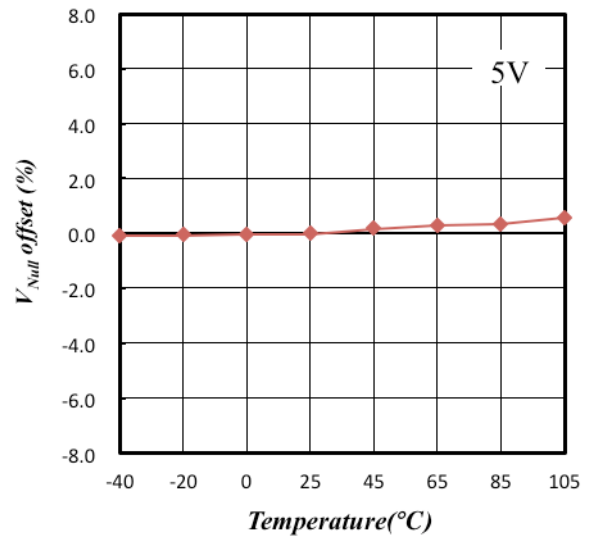


Figure 2. Output Voltage Offset vs. Temperature

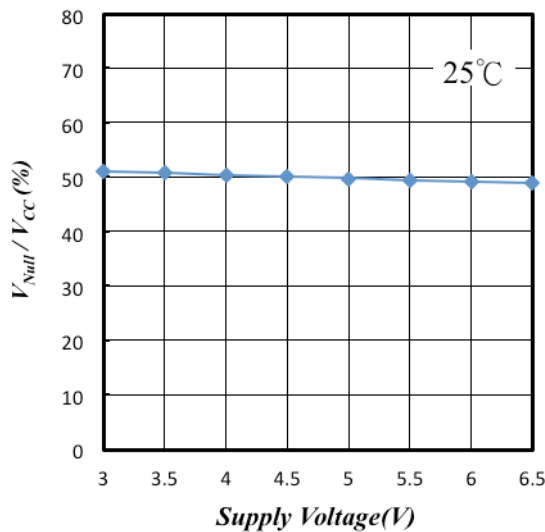


Figure 3. Vout/Vcc Ratio vs. Supply Current

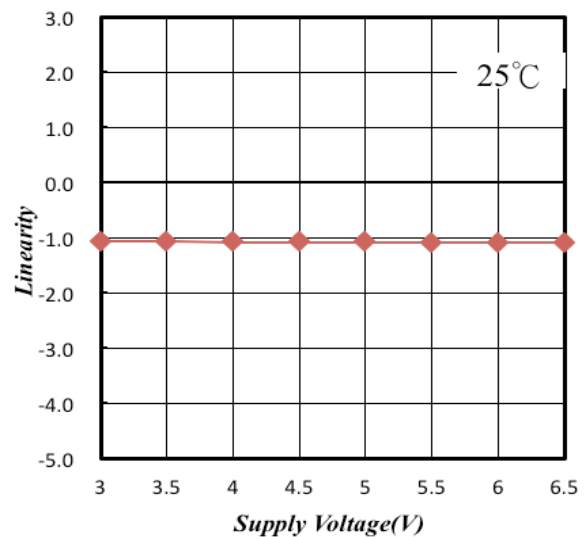


Figure 4. Linearity vs. Supply Voltage

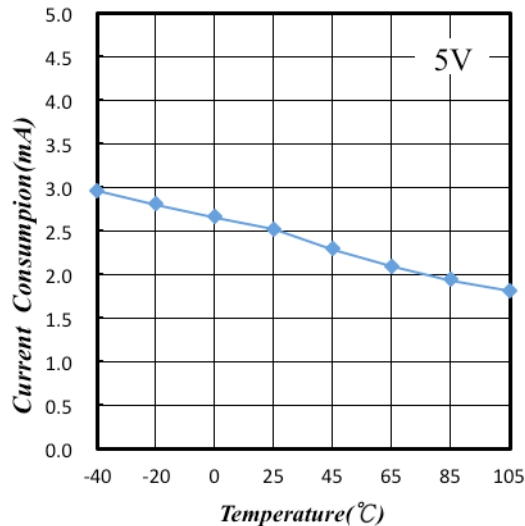


Figure 5. Supply Current vs. Temperature

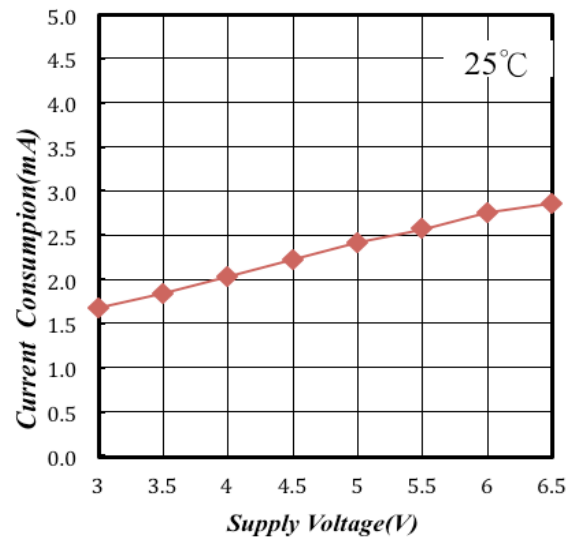


Figure 6. Supply Current vs. Supply Voltage

Characteristic Performance

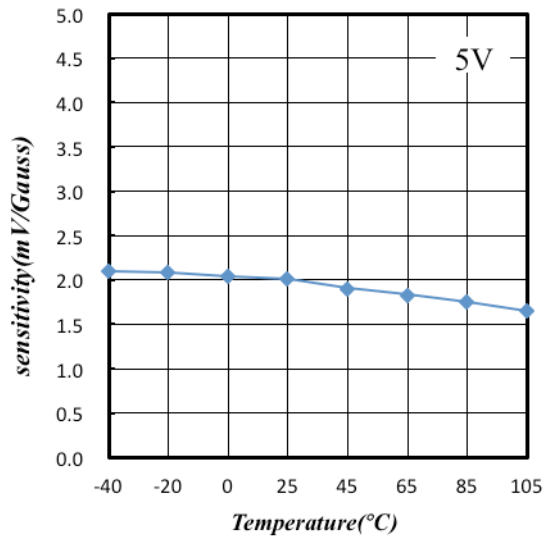


Figure 7. Sensitivity vs. Temperature

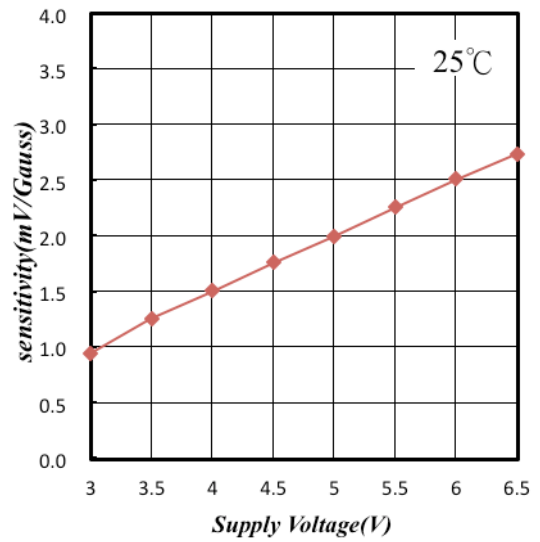


Figure 8. Sensitivity vs. Supply Voltage


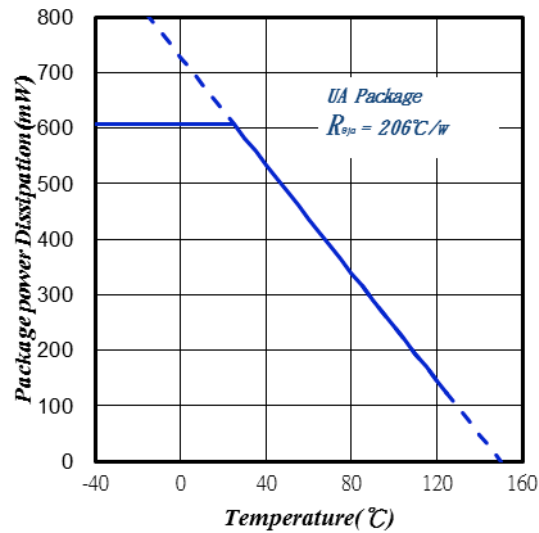



Figure 8. Power Dissipation vs. Temperature

TO-92S Mechanical Drawing

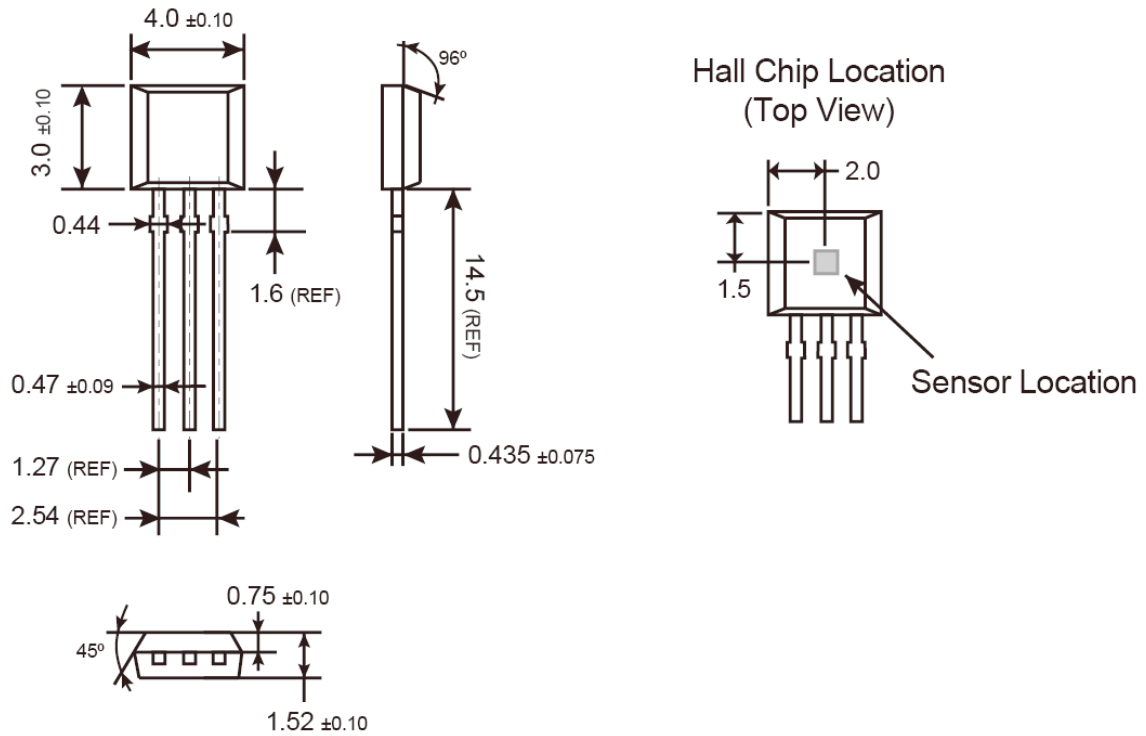

Unit: Millimeters

Marking Diagram



- 481** = Device Code
- Y** = Year Code (3=2013, 4=2014....)
- WW** = Week Code (01~52)

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331