


**LS** series Radial Lead Type, Long Life Assurance



- Ultra-low ESR, High ripple current.
- Load life of 5000 hours at 105°C.
- Radial lead type :  
Lead free flow soldering condition correspondence.
- Compliant to the RoHS directive (2011/65/EU).

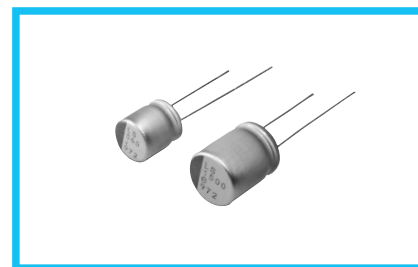

## Specifications

| Item  | Performance Characteristics  |                       |   |
|---|--|-----------------------|---|
| Category Temperature Range                        | -55 to +105°C  |                       |   |
| Rated Voltage Range                               | 2.5 to 16V   |                       |   |
| Rated Capacitance Range                           | 100 to 1500µF  |                       |   |
| Capacitance Tolerance                             | ±20% at 120Hz, 20°C  |                       |   |
| Tangent of loss angle (tan δ)                     | Less than or equal to the specified value at 120Hz, 20°C   |                       |   |
| ESR (※ 1)   | Less than or equal to the specified value at 100kHz, 20°C  |                       |   |
| Leakage Current (※ 2)                             | Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C   |                       |   |
| Temperature Characteristics (Max.Impedance Ratio) | Z+105°C / Z+20°C ≤ 1.25 (100kHz)<br>Z-55°C / Z+20°C ≤ 1.25   |                       |   |
| Endurance   | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours at 105°C.   | Capacitance change    | Within ± 20% of the initial capacitance value (※ 3) |
|   |  | tan δ                 | 150% or less than the initial specified value       |
|   |  | ESR (※ 1)             | 150% or less than the initial specified value       |
|   |  | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Damp Heat (Steady State)                          | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90% RH.  | Capacitance change    | Within ± 20% of the initial capacitance value (※ 3) |
|   |  | tan δ                 | 150% or less than the initial specified value       |
|   |  | ESR (※ 1)             | 150% or less than the initial specified value       |
|   |  | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Resistance to Soldering Heat                      | After soldering the capacitor under the soldering conditions prescribed here as preheat at 150 to 200°C for 60 to 180 seconds and peak temperature at 265°C for 10 seconds or less, the capacitor shall meet the specifications listed at right, provided that its temperature profile is measured at both of terminal ends facing the soldering side. | Capacitance change    | Within ± 10% of the initial capacitance value (※ 3) |
|   |  | tan δ                 | 130% or less than the initial specified value       |
|   |  | ESR (※ 1)             | 130% or less than the initial specified value       |
|   |  | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Marking   | Navy blue print on the case top  |                       |   |

※ 1 ESR should be measured at both of the terminal ends closest to the capacitor body.


※ 2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

※ 3 Initial value : The value before test of examination of resistance to soldering.

## Dimensions



## Type numbering system (Example : 10V 270µF)

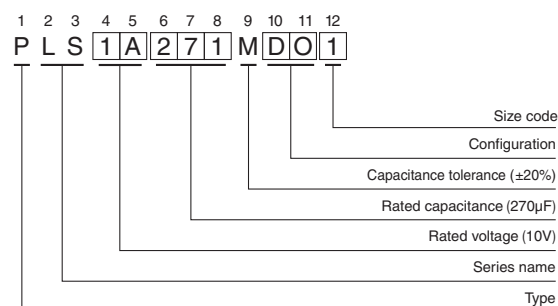

|      | (mm)      |              |         |         |          |           |
|------|-----------|--------------|---------|---------|----------|-----------|
| Size | φ6.3 × 9L | φ6.3 × 10.5L | φ8 × 7L | φ8 × 9L | φ8 × 12L | φ10 × 13L |
| φD   | 6.3       | 6.3          | 8.0     | 8.0     | 8.0      | 10.0      |
| L    | 8.5       | 10.0         | 6.5     | 8.5     | 11.5     | 12.5      |
| P    | 2.5       | 2.5          | 3.5     | 3.5     | 3.5      | 5.0       |
| φd   | 0.6       | 0.5          | 0.6     | 0.6     | 0.6      | 0.6       |

| Voltage | V   |   |     |    |    |
|---------|-----|---|-----|----|----|
| V       | 2.5 | 4 | 6.3 | 10 | 16 |
| Code    | e   | g | j   | A  | C  |

Please refer to page 20 about the end seal configuration.

● Dimension table in next page.



■ Standard Ratings

| Rated Voltage (V) code | Surge Voltage (V) | Rated Capacitance (μF) | Case Size φD × L (mm) | tan δ | Leakage Current (μA) | ESR (mΩ) (at 100kHz 20°C) | Rated Ripple (mArms) | Part Number  |
|------------------------|-------------------|------------------------|-----------------------|-------|----------------------|---------------------------|----------------------|--------------|
| 2.5 (0E)               | 2.8               | 330                    | ○ 6.3 × 9             | 0.08  | 500                  | 8                         | 4800                 | PLS0E331MCO8 |
|                        |                   | 680                    | △ 8 × 7               | 0.08  | 340                  | 15                        | 3900                 | PLS0E681MCL2 |
|                        |                   | 820                    | ○ 6.3 × 9             | 0.08  | 500                  | 8                         | 4800                 | PLS0E821MCO8 |
|                        |                   | 820                    | ▲ 8 × 9               | 0.08  | 410                  | 7                         | 5200                 | PLS0E821MCO6 |
|                        |                   | 820                    | 8 × 12                | 0.08  | 410                  | 7                         | 5800                 | PLS0E821MDO1 |
|                        |                   | 1500                   | 10 × 13               | 0.08  | 750                  | 8                         | 5500                 | PLS0E152MDO1 |
| 4 (0G)                 | 4.6               | 270                    | ○ 6.3 × 9             | 0.08  | 500                  | 8                         | 4800                 | PLS0G271MCO8 |
|                        |                   | 560                    | △ 8 × 7               | 0.08  | 448                  | 15                        | 3900                 | PLS0G561MCL2 |
|                        |                   | 560                    | ▲ 8 × 9               | 0.08  | 448                  | 7                         | 5200                 | PLS0G561MCO6 |
|                        |                   | 680                    | 8 × 12                | 0.08  | 544                  | 7                         | 5800                 | PLS0G681MDO1 |
|                        |                   | 1200                   | 10 × 13               | 0.08  | 960                  | 8                         | 5500                 | PLS0G122MDO1 |
| 6.3 (0J)               | 7.2               | 330                    | ■ 6.3 × 10.5          | 0.08  | 416                  | 20                        | 3000                 | PLS0J331MDL4 |
|                        |                   | 390                    | △ 8 × 7               | 0.08  | 491                  | 15                        | 3900                 | PLS0J391MCL2 |
|                        |                   | 470                    | 8 × 12                | 0.08  | 592                  | 7                         | 5500                 | PLS0J471MDO1 |
|                        |                   | 560                    | ○ 6.3 × 9             | 0.08  | 706                  | 9                         | 4300                 | PLS0J561MCO8 |
|                        |                   | 560                    | ▲ 8 × 9               | 0.08  | 706                  | 8                         | 5000                 | PLS0J561MCO6 |
|                        |                   | 820                    | 10 × 13               | 0.08  | 1033                 | 8                         | 5500                 | PLS0J821MDO1 |
| 10 (1A)                | 11.5              | 150                    | ■ 6.3 × 10.5          | 0.08  | 300                  | 20                        | 3000                 | PLS1A151MDL4 |
|                        |                   | 270                    | 8 × 12                | 0.08  | 540                  | 8                         | 4900                 | PLS1A271MDO1 |
|                        |                   | 470                    | 10 × 13               | 0.08  | 940                  | 8                         | 5500                 | PLS1A471MDO1 |
| 16 (1C)                | 18.4              | 100                    | ■ 6.3 × 10.5          | 0.08  | 320                  | 24                        | 2800                 | PLS1C101MDL4 |
|                        |                   | 270                    | 8 × 12                | 0.08  | 864                  | 9                         | 4500                 | PLS1C271MDO1 |
|                        |                   | 330                    | 10 × 13               | 0.08  | 1056                 | 9                         | 4700                 | PLS1C331MDO1 |
|                        |                   | 470                    | 10 × 13               | 0.08  | 1504                 | 9                         | 4700                 | PLS1C471MDO1 |

Rated ripple current (mArms) at 105°C 100kHz

No marked, 1 will be put at 12th digit of type numbering system.  
 △: In this case, 2 will be put at 12th digit of type numbering system.  
 ■: In this case, 4 will be put at 12th digit of type numbering system.  
 ▲: In this case, 6 will be put at 12th digit of type numbering system.  
 ○: In this case, 8 will be put at 12th digit of type numbering system.

- Please refer to page 20, 21, 22 about the formed or taped product spec.
- Please refer to page 3 for the minimum order quantity.



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331