

## LED Holder for 3 mm and 5 mm LED



See below:

### Approvals and Compliances

#### Description

- PCB Mounting
- Up to 8 holders possible
- Arrangement in-line and in blocks
- For 3 mm or 5 mm LED's

#### Weblinks

[pdf data sheet](#), [html datasheet](#), [CAD-Drawings](#), [Detailed request for product](#)

#### Technical Data

##### Climatical Data

|                       |               |
|-----------------------|---------------|
| Operating Temperature | -25 to 85 °C  |
| Storage Temperature   | -55 to 100 °C |

##### Soldering Data

|                              |                                                            |
|------------------------------|------------------------------------------------------------|
| Solderability                | 235 °C / 2 sec acc. to IEC 60068-2-20 , Test Ta, method 1  |
| Resistance to Soldering Heat | 260 °C / 5 sec acc. to IEC 60068-2-20 , Test Tb, method 1A |

##### Material

|        |               |
|--------|---------------|
| Socket | Thermoplastic |
|--------|---------------|

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.


### Compliances

The product complies with following Guide Lines


| Identification                                                                      | Details                    | Initiator   | Description                                                                                                                                                             |
|-------------------------------------------------------------------------------------|----------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">RoHS</a>       | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                      |
|  | <a href="#">China RoHS</a> | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                    |
|  | <a href="#">REACH</a>      | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

**Dimension [mm]**


AST single 3 mm / AST row 3 mm

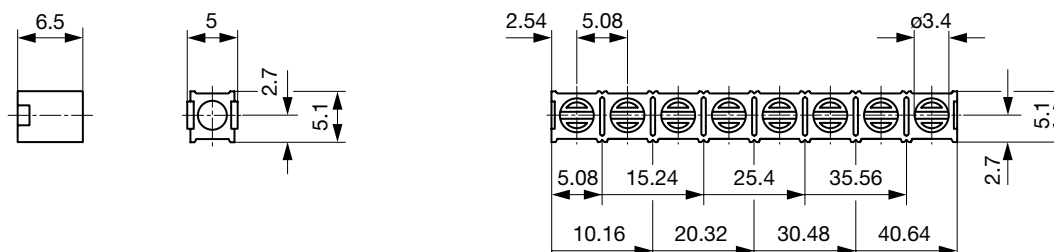

AST double 3 mm / AST double row 3 mm

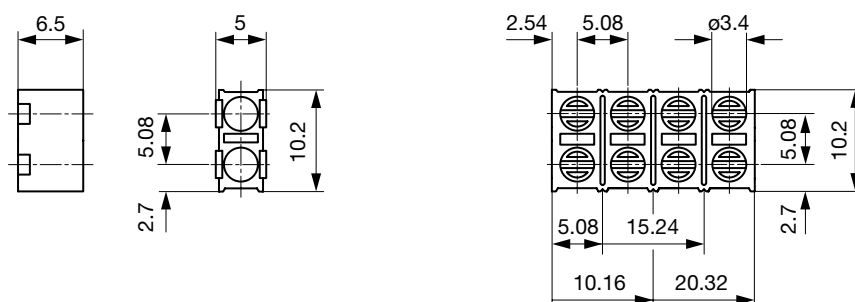

AST row 5 mm

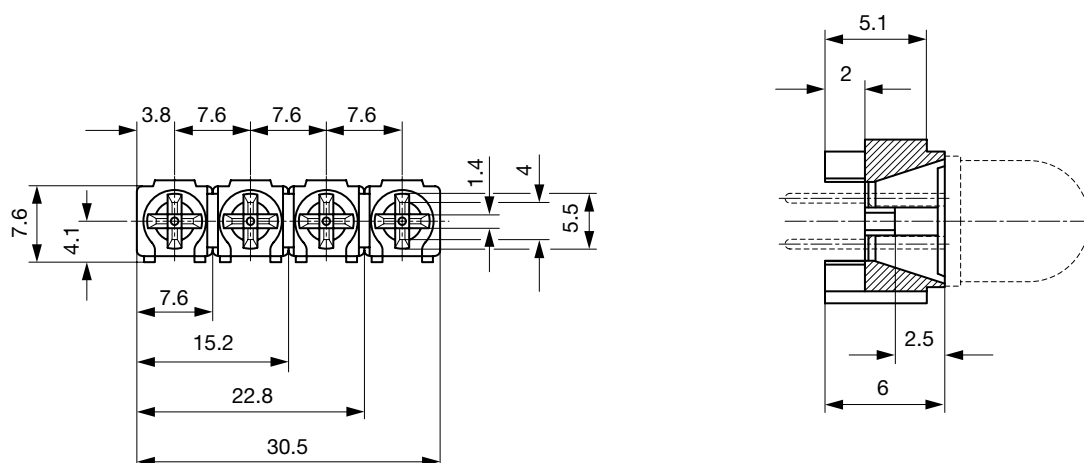

gerade Anschlüsse  
straight contacts



0035.9665.



0035.9666.



0035.9667.



0035.9668.



Anschlüsse abgewinkelt  
contacts angled 90°



0035.9675.



0035.9676.



0035.9677.



0035.9678.



Farbe der LED  
Colour of LED

Die Farbwahl erfolgt jeweils  
von unten nach oben.  
(Von links nach rechts)

The colour is advised from  
the bottom to the top.  
(From the left to the right)

|           |               |   |   |   |   |
|-----------|---------------|---|---|---|---|
| rot/rot   | red/red       | 1 | 1 | 1 | 1 |
| rot/grün  | red/green     | 2 | 2 | 2 | 2 |
| rot/gelb  | red/yellow    | 3 | 3 | 3 | 3 |
| grün/grün | green/green   | 4 | 4 | 4 | 4 |
| grün/rot  | green/red     | 5 | 5 | 5 | 5 |
| grün/gelb | green/yellow  | 6 | 6 | 6 | 6 |
| gelb/gelb | yellow/yellow | 7 | 7 | 7 | 7 |
| gelb/rot  | yellow/red    | 8 | 8 | 8 | 8 |
| gelb/grün | yellow/green  | 9 | 9 | 9 | 9 |

## All Variants

| Diameter LED | Type      | Order Number              |
|--------------|-----------|---------------------------|
| 5 mm         | 1x4 Array | <a href="#">0035.9203</a> |
| 5 mm         | 1x3 Array | <a href="#">0035.9204</a> |
| 5 mm         | 1x2 Array | <a href="#">0035.9205</a> |
| 5 mm         | 1x1 Array | <a href="#">0035.9206</a> |
| 3 mm         | 1x1 Array | <a href="#">0035.9610</a> |
| 3 mm         | 1x2 Array | <a href="#">0035.9611</a> |
| 3 mm         | 1x3 Array | <a href="#">0035.9612</a> |
| 3 mm         | 1x4 Array | <a href="#">0035.9613</a> |
| 3 mm         | 1x5 Array | <a href="#">0035.9614</a> |
| 3 mm         | 1x7 Array | <a href="#">0035.9616</a> |
| 3 mm         | 1x8 Array | <a href="#">0035.9617</a> |
| 3 mm         | 2x1 Array | <a href="#">0035.9660</a> |
| 3 mm         | 2x2 Array | <a href="#">0035.9661</a> |
| 3 mm         | 2x3 Array | <a href="#">0035.9662</a> |
| 3 mm         | 2x4 Array | <a href="#">0035.9663</a> |

 Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

|                       |         |
|-----------------------|---------|
| <b>Packaging unit</b> | 100 pcs |
|-----------------------|---------|



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331