

# MA4EX370H-1225T



Silicon Double Balanced HMIC Mixer  
3000 - 4000 MHz

Rev. V1

## Features

- 6.8 dB Typical Conversion Loss
- +13 to +17 dBm LO Drive
- HMIC IC Process
- Silicon High Barrier Schottky Barrier Diodes
- DC - 1050 MHz IF Bandwidth
- Low Cost Miniature Plastic Package


## Description

M/A-COM's MA4EX370H-1225T is a silicon monolithic 3.0 -4.0 GHz double balanced mixer in a low cost miniature surface mount SOT25 package. The die uses M/A-COM's unique HMIC silicon/glass process to realize low loss passive elements while retaining the advantages of high barrier silicon Schottky barrier diodes.

## Applications

These mixers are well suited for high volume WLL and WLAN applications where small size and repeatability are required. Typical applications include frequency conversion, modulation, and demodulation in wireless receivers and transmitters.

## Package Outline

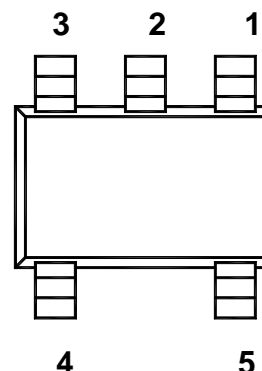

## PIN CONFIGURATION

PIN	Function	PIN	Function
1	RF	4	Gnd
2	Gnd	5	IF
3	LO		

## Ordering Information

Model No.	Package
MA4EX370H-1225T	Tape and Reel

## Electrical Specifications @ +25°C

Parameter	Frequency Range	Test Conditions	Units	Min.	Typ.	Max.
Conversion Loss	3500 MHz 3.0 - 4.0 GHz	LO Drive = +15 dBm RF = -10 dBm, IF = 60 MHz	dB		6.8 6.8	8.5 9.0
L - R Isolation	3500 MHz 3.0 - 4.0 GHz	LO Drive = +15 dBm RF Level = - 10 dBm	dB		27.5 26.0	
L - I Isolation	3500 MHz 3.0 - 4.0 GHz	LO Drive = +15 dBm RF Level = - 10 dBm	dB		29.0 27.0	
R - I Isolation	3500 MHz 3.0 - 4.0 GHz	LO Drive = +15 dBm RF Level = - 10 dBm	dB		11.0 12.0	
RF VSWR	3500 MHz 3.0 - 4.0 GHz	LO Drive = +15 dBm RF Level = - 10 dBm			1.25 2.0	
IF VSWR	DC - 500 MHz	LO Drive = +15 dBm IF Level = - 10 dBm			2.0	
Input IP3	3500 MHz 3.0 - 4.0 GHz	LO Drive = +15 dBm RF = -10 dBm, IF = 60 MHz	dBm		12.5 13.5	
Input 1 dB Compression	3500 MHz 3.0 - 4.0 GHz	LO Drive = +15 dBm RF = -10 dBm, IF = 60 MHz	dBm		8.0 8.5	
IF 1 dB Bandwidth	DC - 500 MHz	LO = 3650 MHz @+15dBm	MHz			1050

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400  
• India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588  
Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

# MA4EX370H-1225T




Silicon Double Balanced HMIC Mixer  
3000 - 4000 MHz

Rev. V1


## Typical Performance Curves

(LO Drive = +15dBm, RF = -10dBm, IF = 60MHz)


### CONVERSION LOSS

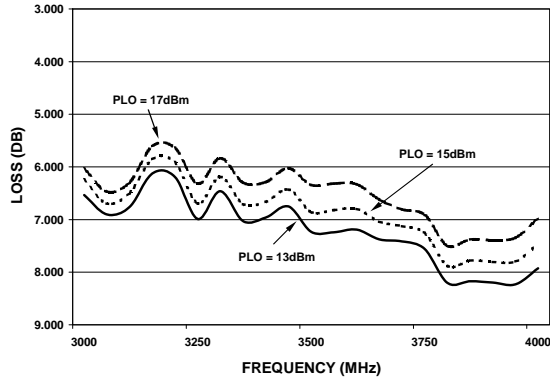

### VSWR

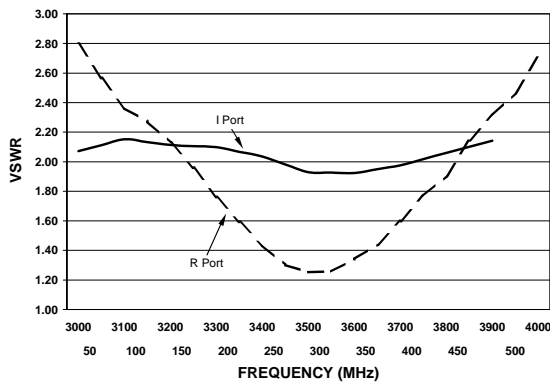

### Case Style – SOT-25

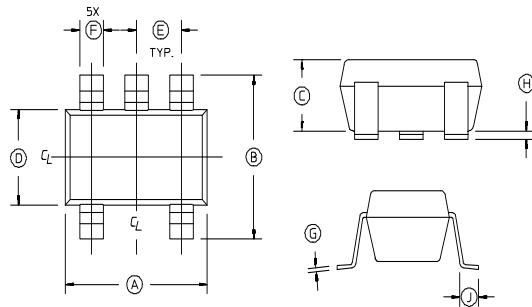


### Absolute Maximum Ratings<sup>1</sup>


Parameter	Maximum Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Incident LO Power	+20 dBm
Incident RF Power	+20 dBm

1. Exceeding these limits may cause permanent damage.


### ISOLATION

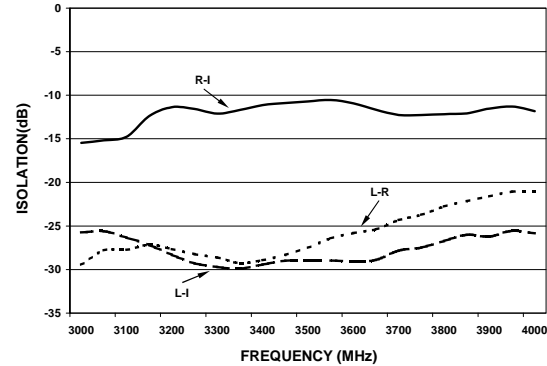

### INPUT IP3 & 1dB Compression Point

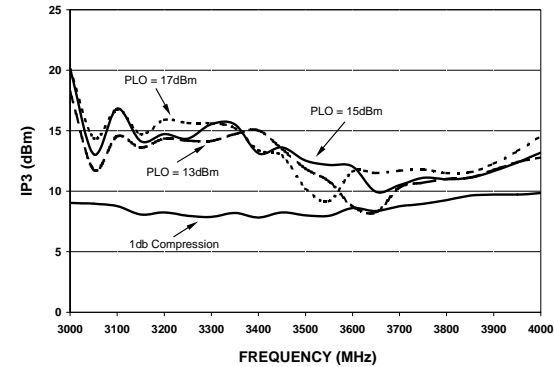

### Schematic

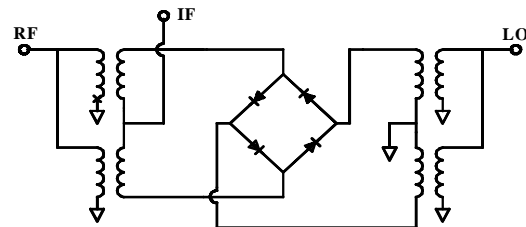

### SOT-25

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.106	.122	2.70	3.10
B	.100	.118	2.54	3.00
C	—	.051	—	1.30
D	.063 REF.		1.60 REF.	
E	.032	.043	.80	1.10
F	.014	.020	.35	.50
G	.003	—	.08	—
H	.000	.006	.00	.15
J	.018 REF.		.45 REF.	

Notes: 1. Leads Coplanarity should be 0.003 (0.08) max.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400  
• India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

# MA4EX370H-1225T



Silicon Double Balanced HMIC Mixer  
3000 - 4000 MHz

Rev. V1

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266
- **Europe** Tel: +353.21.244.6400
- **India** Tel: +91.80.43537383
- **China** Tel: +86.21.2407.1588

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

*M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.*



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331