

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0736443000](#)
Status: **Active**
Overview: [hdm](#)
Description: 2.00mm (.079") Pitch HDM® Board-to-Board Backplane Header, Vertical, SMC, Press-Fit, Guide Post Location B, Polarizing Key Position A, 144 Circuits

Documents:
[3D Model](#) [Drawing \(PDF\)](#)
[Test Summary \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [73644](#)
Application Backplane
Comments Standard Press-Fit, Tin/Lead (SnPb)
Component Type PCB Header
Overview [hdm](#)
Product Name HDM®
Style N/A

Physical

Circuits (Loaded) 144
Circuits (maximum) 144
Color - Resin Black, Natural
Durability (mating cycles max) 250
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part Yes
Material - Metal Phosphor Bronze, Stainless Steel
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Columns 24
Number of Pairs Open Pin Field
Number of Rows 6
Orientation Vertical
PC Tail Length (in) 0.138 In
PC Tail Length (mm) 3.50 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.098 In
PCB Thickness Recommended (mm) 2.50 mm
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Pitch - Term. Interface (in) 0.079 In
Pitch - Term. Interface (mm) 2.00 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.75
Plating min: Termination (µin) 15
Plating min: Termination (µm) 0.375



Series

image - Reference only

EU RoHS
RoHS Compliant by Exemption
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS

Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[73644Series](#)

Mates With
[73632](#) HDM PLUS® Board-to-Board Daughtercard Receptacle. [73780](#) HDM® Board-to-Board Daughtercard Receptacle

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Flat Rock Tooling for	0622013700
Pneumatic Press	
HDM® Backplane	0621001400
Insertion Signal	
Contact Tool	
HDM® Backplane	0622005703
Insertion Head for	
144 Positions	



Polarized to PCB	No	Extraction Tool	0621001000
Stackable	No		
Surface Mount Compatible (SMC)	Yes		
Temperature Range - Operating	-55°C to +105°C		
Termination Interface: Style	Through Hole - Compliant Pin		
Electrical			
Current - Maximum per Contact	1A		
Data Rate	1.0 Gbps		
Real Signals (per 25mm)	75		
Shielded	No		
Voltage - Maximum	250V AC		
Material Info			
Reference - Drawing Numbers			
Packaging Specification	PK-70873-0818		
Sales Drawing	SDA-73644-****		

HDM and High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/14/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0, COLOR: BLACK, TERMINAL - PHOSPHOR BRONZE.
2. FINISHES: SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MINIMUM THICKNESS; NICKEL (Ni) AND GOLD FLASH OVERALL SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MIN. THICKNESS; SELECTIVE TIN/LEAD (Sb/Pb) IN TAIL AREA; NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-73670-9999.
4. FOR MIXED CONTACT MATING LENGTHS, CONSULT FACTORY FOR AVAILABILITY.
5. DIMENSIONS ARE IN MILLIMETERS.
6. FOR SPECIFIC MATERIAL NUMBERS, REFER TO SHEET 2.
7. PACKAGE PER PK-70873-0818.
8. PARTS MARKED WITH PART NUMBER AND DATE CODE, ON EITHER SIDE, APPROXIMATELY WHERE SHOWN.

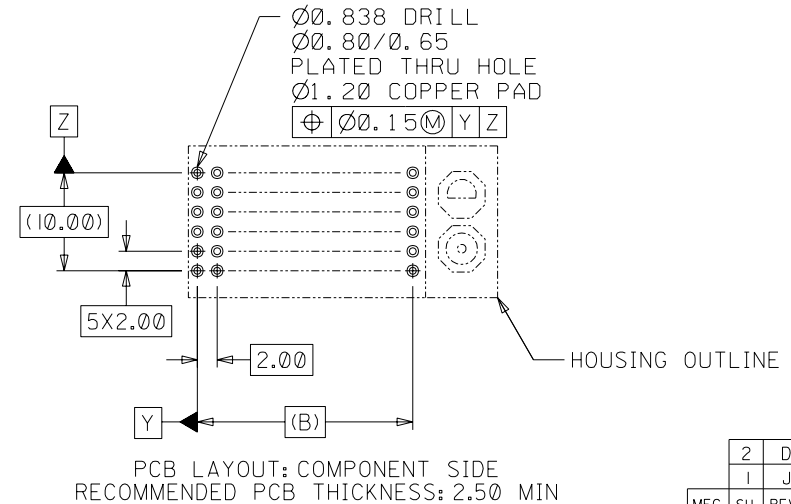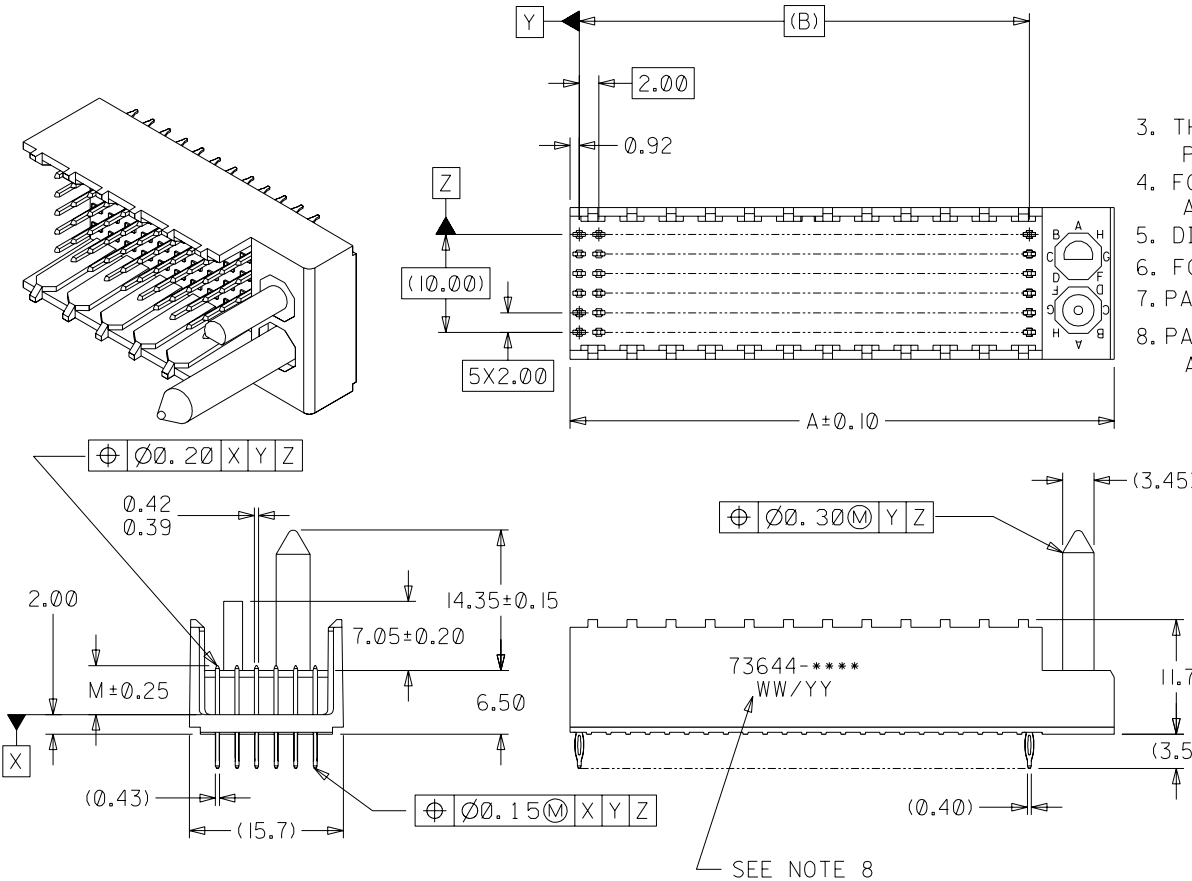

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: 2.50 MIN

2	D
1	J
MFG. SH.	REV.

DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± N/A	---
2 PLACE	± N/A	± 0.05
1 PLACE	---	± 0.10

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

DRWG. BY	JRR	CHK'D. BY	SMR
APP'D. BY	CAB	SCALE	2 : 1

REVISIONS ONLY ON CAD SYSTEM

TITLE

SALES ASSY, HDM BACKPLANE MODULE, POLAR/GUIDE OPTION	SHEET NO. 1 OF 2	DATE 96/12/18
---	---------------------	------------------

MOLEX INCORPORATED LISLE, ILL. 60532	PART NO. SDA-73644-****	DIV. DA	SIZE B
---	----------------------------	------------	-----------


10		9	8	7	6		7364
F	MATERIAL NUMBER	NUMBER OF SIGNAL CONTACTS	PLATING		DIM "A"	DIM "B"	DIM "M"
	73644-00**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.00
	73644-01**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.50
	73644-02**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	6.00
	73644-10**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.00
	73644-11**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.50
	73644-12**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	6.00
E	73644-20**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.00
	73644-21**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.50
	73644-22**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	6.00
	73644-30**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.00
	73644-31**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.50
	73644-32**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	6.00

MATERIAL NUMBER ASSIGNMENT


73644- * * * *

0 = 72-CIRCUIT, GOLD/GOLD FLASH
1 = 144-CIRCUIT, GOLD/GOLD FLASH
2 = 72-CIRCUIT, GOLD/TIN-LEAD
3 = 144-CIRCUIT, GOLD/TIN-LEAD

```
0 = 5.00 MATING LENGTH
1 = 5.50 MATING LENGTH
2 = 6.00 MATING LENGTH
```

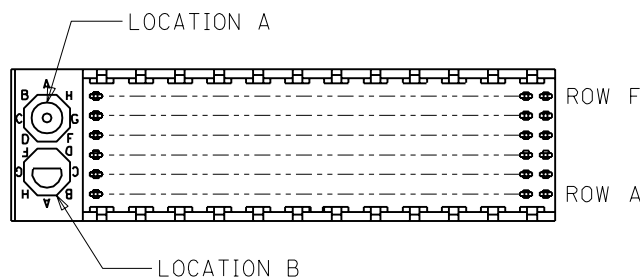

REF. MATERIAL NUMBER 73644-0009
GUIDE PIN IS IN LOCATION A
POLARIZING KEY IS IN LOCATION B, POSITION E

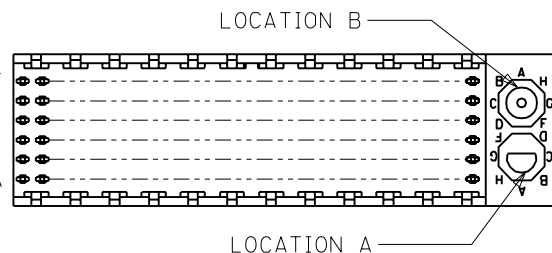

REF. MATERIAL NUMBER 73644-0008
GUIDE PIN IS IN LOCATION B
POLARIZING KEY IS IN LOCATION A, POSITION E

NUMBER	GUIDE POST LOCATION	POLAR KEY POSITION
00	B	A
01	A	
02	B	B
03	A	
04	B	C
05	A	
06	B	D
07	A	
08	B	E
09	A	
10	B	F
11	A	
12	B	G
13	A	
14	B	H
15	A	
16	B	N/A
17	A	
18	N/A	

[illegible]



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331