Features

- Multi-touch capacitive touchscreen controller
  - ❏ 32-bit ARM® Cortex® CPU
  - ❏ Register-configurable
  - ❏ Noise-suppression technologies for display and EMI
    - Effective 20-V drive for higher signal-to-noise ratio (SNR)[1]
    - AutoArmor™ improves both electromagnetic emissions and immunity
    - External display synchronization
  - ❏ Water rejection and wet-finger tracking using DualSense™
  - ❏ Multi-touch glove with automatic mode switching
    - Ten fingers with thin glove (≤1-mm thick)
    - Two fingers with thick glove (≤5-mm thick)
  - ❏ Large object rejection
  - ❏ Automatic baseline tracking to environmental changes
  - ❏ Low-power look-for-touch mode
  - ❏ Field upgrades via bootloader
  - ❏ Cypress Manufacturing Test Kit (MTK)
  - ❏ Touchscreen sensor self-test

- System performance (configuration dependent)
  - ❏ Screen sizes up to 8.5-inch diagonal
    - 6.2-mm electrode pitch; 16:9 aspect ratio
  - ❏ Up to 48 sense pins, 527 intersections; 16:9 aspect ratio (17 RX and 31 TX)
  - ❏ Reports up to ten fingers
  - ❏ Small finger support down to 4 mm
  - ❏ Refresh rate up to 250 Hz; other rates configurable
  - ❏ TX frequency up to 350 kHz

- Power (configuration-dependent)
  - ❏ 1.71- to 1.95-V and 3.0- to 5.5-V logic and digital I/Os supply
  - ❏ 3.0- to 5.5-V analog supply
  - ❏ 9-mW average power
  - ❏ 11-µW typical deep-sleep power

- Sensor and system design (configuration-dependent)
  - ❏ Supports a variety of touchscreen sensors and stackups
    - Manhattan, diamond
    - Sensor-on-Lens (SOL)
    - On-cell
    - Plastic (PET) and glass-sensor substrates
    - LCD, AMOLED, and IPS displays
    - Metal mesh

- Communication interface
  - ❏ I²C slave at 100 and 400 kbps
  - ❏ SPI slave bit rates up to 8 Mbps

- Package
  - ❏ 100-pin TQFP 14 × 14 × 1.4 mm (0.5-mm pitch)

- Ambient temperature range
  - ❏ Automotive-A: –40 °C to 85 °C
  - ❏ Automotive-S: –40 °C to 105 °C

Note
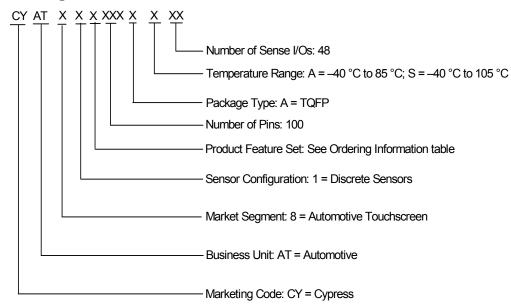1. Effective voltage when using 17 multi-phase TX and 5-V V_{CCTX} supply.

Ordering Information

Table 1 lists the CYAT8165X TrueTouch touchscreen controllers.

Table 1. Ordering Information[2]

Marketing Part Number	Number of Sense Pins	Number of Fingers	5-V Tx	Display Armor	Capsense Buttons	Water Rejection	Thin Glove Support	Gestures	Thick Overlay/Thick Glove Support	Package
CYAT81650-100AA48	48	10	✔	✔	–	–	–	–	–	100-pin TQFP
CYAT81650-100ASA48	48	10	✔	✔	–	–	–	–	–	100-pin TQFP
CYAT81652-100AA48	48	10	✔	✔	✔	✔	✔	–	–	100-pin TQFP
CYAT81652-100AS48	48	10	✔	✔	✔	✔	✔	–	–	100-pin TQFP
CYAT81655-100AA48	48	10	✔	✔	✔	✔	✔	✔	–	100-pin TQFP
CYAT81655-100AS48	48	10	✔	✔	✔	✔	✔	✔	–	100-pin TQFP
CYAT81658-100AA48	48	10	✔	✔	✔	✔	✔	✔	✔	100-pin TQFP
CYAT81658-100AS48	48	10	✔	✔	✔	✔	✔	✔	✔	100-pin TQFP

Ordering Code Definitions

CY AT X X X XXX X X XX

- Number of Sense I/Os: 48
- Temperature Range: A = –40 °C to 85 °C; S = –40 °C to 105 °C
- Package Type: A = TQFP
- Number of Pins: 100
- Product Feature Set: See Ordering Information table
- Sensor Configuration: 1 = Discrete Sensors
- Market Segment: 8 = Automotive Touchscreen
- Business Unit: AT = Automotive
- Marketing Code: CY = Cypress

Note
2. All devices have the following base features: Water Rejection, DisplayArmor™, AutoArmor™, DualSense™, CapSense buttons, Large Object Detection and Rejection, and Grip Suppression.

Document History Page

Document Title: CYAT8165X (48 I/Os), Automotive TrueTouch® Multi-Touch All-Points Touchscreen Controller Document Number: 002-16617				
Revision	ECN	Orig. of Change	Submission Date	Description of Change
**	5437893	GACH	09/16/2016	Initial release

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products	
ARM® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Lighting & Power Control	cypress.com/powerpsoc
Memory	cypress.com/memory
PSoC	cypress.com/psoc
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless/RF	cypress.com/wireless

PSoC® Solutions

PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP

Cypress Developer Community

Forums | Projects | Video | Blogs | Training | Components

Technical Support

cypress.com/support

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург, Промышленная ул, дом № 19, литера Н, помещение 100-Н Офис 331