




## IR Receiver Modules for Remote Control Systems

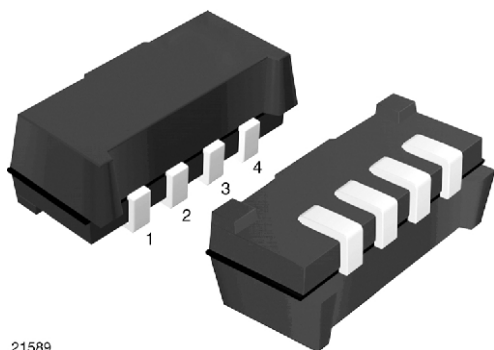

21589

### MECHANICAL DATA

#### Pinning:

1, 4 = GND, 2 =  $V_S$ , 3 = OUT

### FEATURES

- Very low supply current
- Photo detector and preamplifier in one package
- Internal filter for PCM frequency
- Supply voltage: 2.5 V to 5.5 V
- Improved immunity against ambient light
- Capable of side or top view
- Low profile 2.35 mm
- Insensitive to supply voltage ripple and noise
- Narrow optical filter to reduce interference from plasma TV emissions
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
**GREEN**  
(5-2008)

### DESCRIPTION

The TSOP752..W, TSOP754..W series are miniaturized receiver modules for infrared remote control systems. Two PIN diodes and a preamplifier are assembled on a leadframe, the epoxy package is designed as an IR filter.


The demodulated output signal can be directly decoded by a microprocessor. The TSOP752..W is compatible with all common IR remote control data formats. The TSOP754..W is optimized to suppress almost all spurious pulses from energy saving fluorescent lamps but will also suppress some data signals.

This component has not been qualified according to automotive specifications.

### PARTS TABLE


| CARRIER FREQUENCY | STANDARD APPLICATIONS (AGC2/AGC8) | VERY NOISY ENVIRONMENTS (AGC4) |
|-------------------|-----------------------------------|--------------------------------|
| 30 kHz            | TSOP75230W                        | TSOP75430W                     |
| 33 kHz            | TSOP75233W                        | TSOP75433W                     |
| 36 kHz            | TSOP75236W                        | TSOP75436W                     |
| 38 kHz            | TSOP75238W                        | TSOP75438W                     |
| 40 kHz            | TSOP75240W                        | TSOP75440W                     |
| 56 kHz            | TSOP75256W                        | TSOP75456W                     |

### BLOCK DIAGRAM

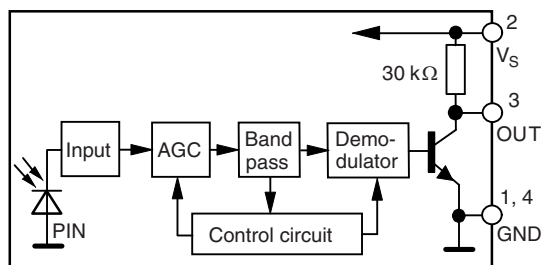

20445-1

### APPLICATION CIRCUIT

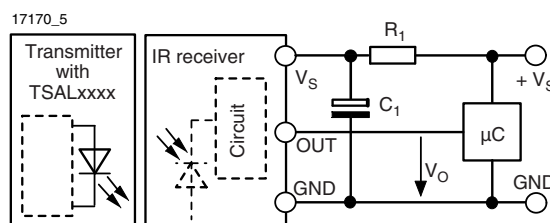

$R_1$  and  $C_1$  are recommended for protection against EOS. Components should be in the range of  $33 \Omega < R_1 < 1 \text{ k}\Omega$ ,  $C_1 > 0.1 \mu\text{F}$ .

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER                   | TEST CONDITION              | SYMBOL    | VALUE                    | UNIT |
|-----------------------------|-----------------------------|-----------|--------------------------|------|
| Supply voltage              |                             | $V_S$     | - 0.3 to + 6             | V    |
| Supply current              |                             | $I_S$     | 3                        | mA   |
| Output voltage              |                             | $V_O$     | - 0.3 to ( $V_S + 0.3$ ) | V    |
| Output current              |                             | $I_O$     | 5                        | mA   |
| Junction temperature        |                             | $T_j$     | 100                      | °C   |
| Storage temperature range   |                             | $T_{stg}$ | - 25 to + 85             | °C   |
| Operating temperature range |                             | $T_{amb}$ | - 25 to + 85             | °C   |
| Power consumption           | $T_{amb} \leq 85\text{ °C}$ | $P_{tot}$ | 10                       | mW   |

### Note

- Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect the device reliability.

### ELECTRICAL AND OPTICAL CHARACTERISTICS (T<sub>amb</sub> = 25 °C, unless otherwise specified)

| PARAMETER             | TEST CONDITION                                                                                   | SYMBOL             | MIN. | TYP.     | MAX. | UNIT            |
|-----------------------|--------------------------------------------------------------------------------------------------|--------------------|------|----------|------|-----------------|
| Supply voltage        |                                                                                                  | $V_S$              | 2.5  |          | 5.5  | V               |
| Supply current        | $E_v = 0, V_S = 3.3 \text{ V}$                                                                   | $I_{SD}$           | 0.27 | 0.35     | 0.45 | mA              |
|                       | $E_v = 40 \text{ klx, sunlight}$                                                                 | $I_{SH}$           |      | 0.45     |      | mA              |
| Transmission distance | $E_v = 0$ , test signal see fig. 1,<br>IR diode TSAL6200,<br>$I_F = 250 \text{ mA}$              | d                  |      | 30       |      | m               |
| Output voltage low    | $I_{OSL} = 0.5 \text{ mA}$ , $E_e = 0.7 \text{ mW/m}^2$ ,<br>test signal see fig. 1              | $V_{OSL}$          |      |          | 100  | mV              |
| Minimum irradiance    | Pulse width tolerance:<br>$t_{pi} - 5/f_o < t_{po} < t_{pi} + 6/f_o$ ,<br>test signal see fig. 1 | $E_e \text{ min.}$ |      | 0.3      | 0.7  | $\text{mW/m}^2$ |
| Maximum irradiance    | $t_{pi} - 5/f_o < t_{po} < t_{pi} + 6/f_o$ ,<br>test signal see fig. 1                           | $E_e \text{ max.}$ | 30   |          |      | $\text{W/m}^2$  |
| Directivity           | Angle of half transmission<br>distance                                                           | $\varphi_{1/2}$    |      | $\pm 75$ |      | deg             |

**TYPICAL CHARACTERISTICS** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)

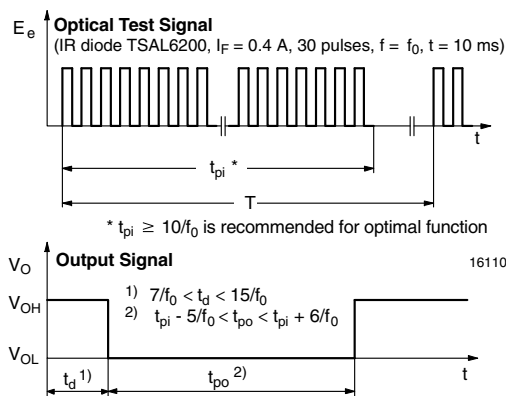


Fig. 1 - Output Active Low

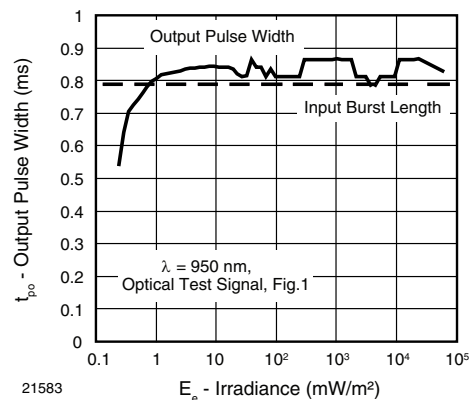


Fig. 2 - Pulse Length and Sensitivity in Dark Ambient

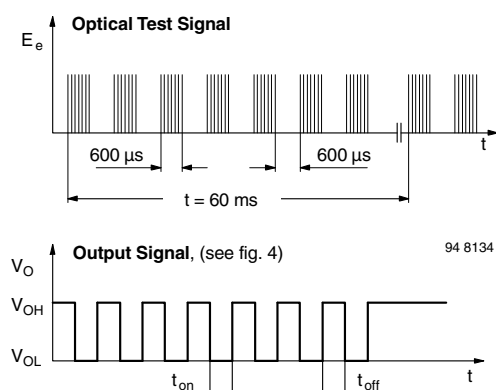


Fig. 3 - Output Function

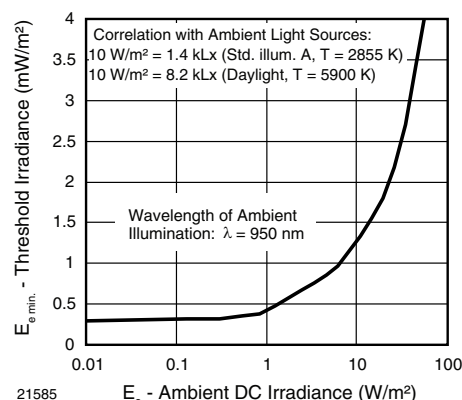


Fig. 6 - Sensitivity in Bright Ambient

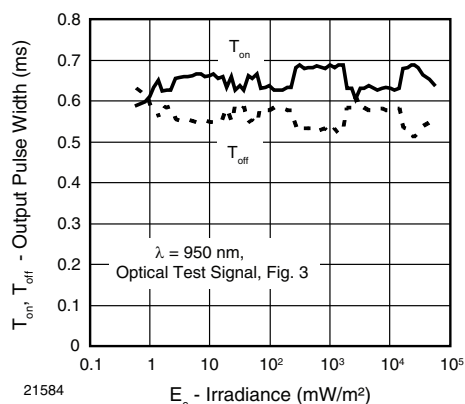


Fig. 4 - Output Pulse Diagram

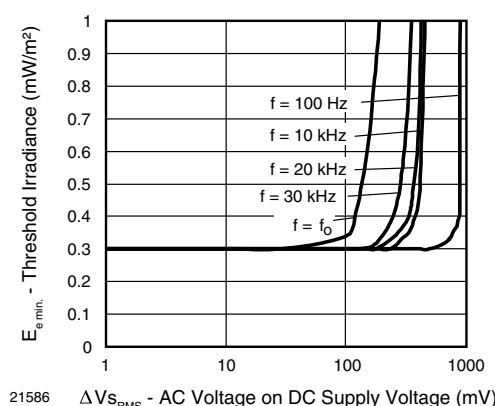


Fig. 7 - Sensitivity vs. Supply Voltage Disturbances

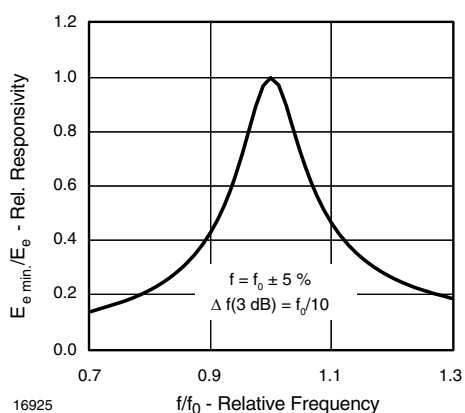


Fig. 5 - Frequency Dependence of Responsivity

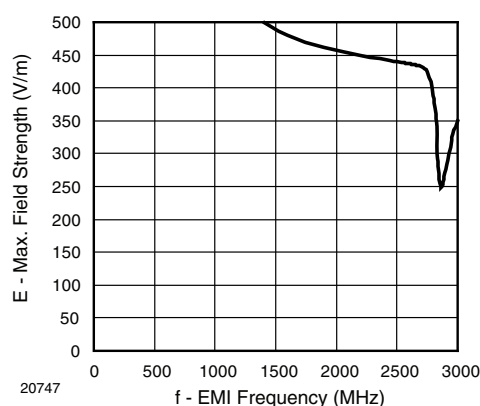


Fig. 8 - Sensitivity vs. Electric Field Disturbances

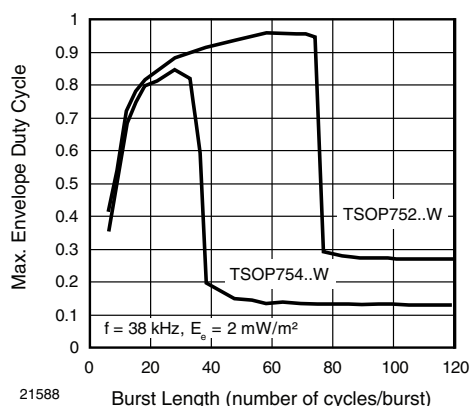


Fig. 9 - Max. Envelope Duty Cycle vs. Burst Length

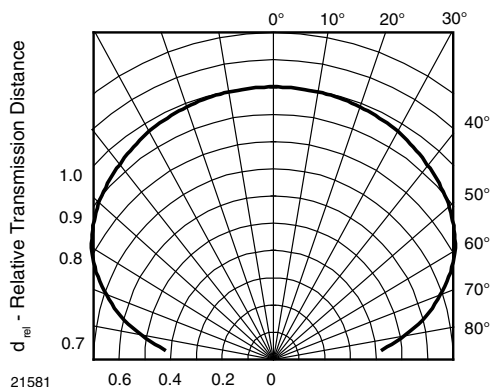


Fig. 12 - Horizontal Directivity

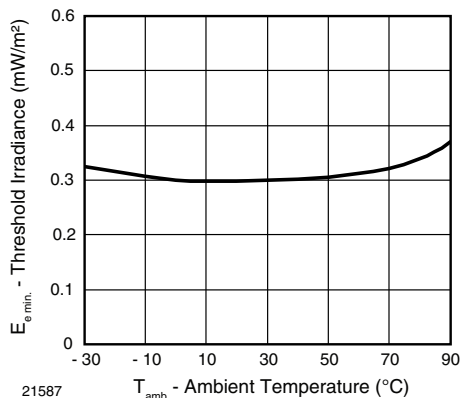


Fig. 10 - Sensitivity vs. Ambient Temperature

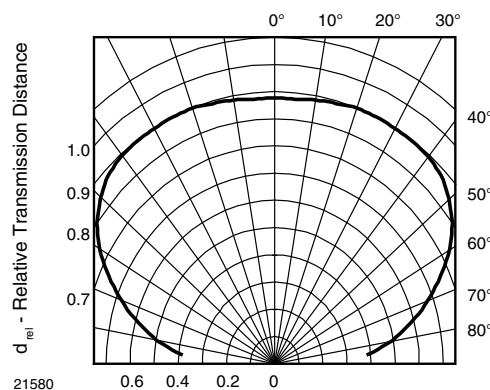


Fig. 13 - Vertical Directivity

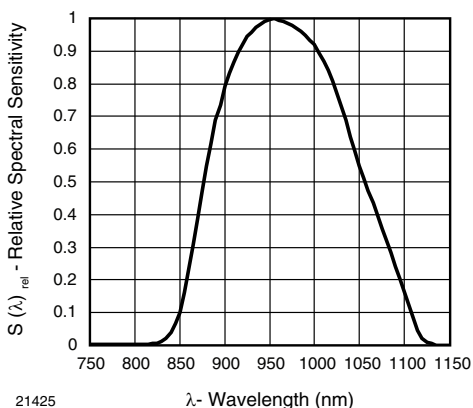


Fig. 11 - Relative Spectral Sensitivity vs. Wavelength



## SUITABLE DATA FORMAT

The TSOP752..W, TSOP754..W series is designed to suppress spurious output pulses due to noise or disturbance signals. Data and disturbance signals can be distinguished by the devices according to carrier frequency, burst length and envelope duty cycle. The data signal should be close to the band-pass center frequency (e.g. 38 kHz) and fulfill the conditions in the table below.

When a data signal is applied to the TSOP752..W, TSOP754..W in the presence of a disturbance signal, the sensitivity of the receiver is reduced to insure that no spurious pulses are present at the output. Some examples of disturbance signals which are suppressed are:

- DC light (e.g. from tungsten bulb or sunlight)
- Continuous signals at any frequency
- Strongly or weakly modulated noise from fluorescent lamps with electronic ballasts (see figure 14 or figure 15)

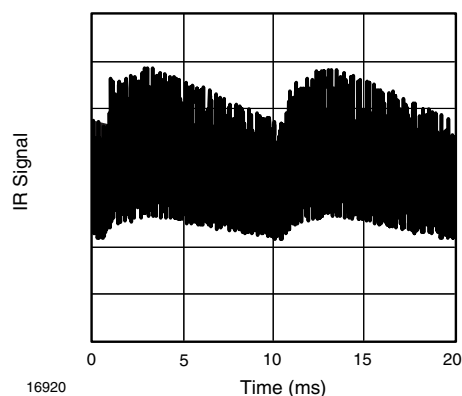


Fig. 14 - IR Signal from Fluorescent Lamp with Low Modulation

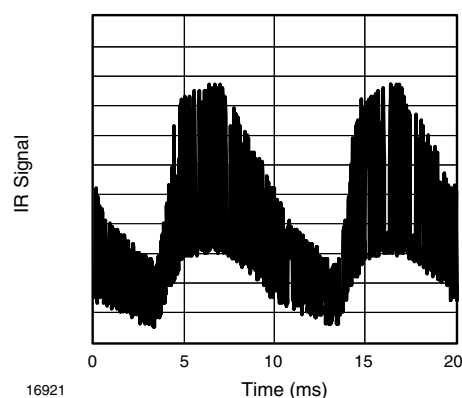


Fig. 15 - IR Signal from Fluorescent Lamp with High Modulation


|                                                                               | TSOP752..W                                        | TSOP754..W                                         |
|-------------------------------------------------------------------------------|---------------------------------------------------|----------------------------------------------------|
| Minimum burst length                                                          | 10 cycles/burst                                   | 10 cycles/burst                                    |
| After each burst of length<br>a minimum gap time is required of               | 10 to 70 cycles<br>≥ 10 cycles                    | 10 to 35 cycles<br>≥ 10 cycles                     |
| For bursts greater than<br>a minimum gap time in the data stream is needed of | 70 cycles<br>> 4 x burst length                   | 35 cycles<br>> 10 x burst length                   |
| Maximum number of continuous short bursts/second                              | 1800                                              | 1500                                               |
| Recommended for NEC code                                                      | yes                                               | yes                                                |
| Recommended for RC5/RC6 code                                                  | yes                                               | yes                                                |
| Recommended for Sony code                                                     | yes                                               | no                                                 |
| Recommended for Thomson 56 kHz code                                           | yes                                               | yes                                                |
| Recommended for Mitsubishi code (38 kHz, preburst 8 ms, 16 bit)               | yes                                               | no                                                 |
| Recommended for Sharp code                                                    | yes                                               | yes                                                |
| Suppression of interference from fluorescent lamps                            | Most common disturbance<br>signals are suppressed | Even extreme disturbance<br>signals are suppressed |

### Note

- For data formats with short bursts please see the datasheet for TSOP753..



**PACKAGE DIMENSIONS** in millimeters

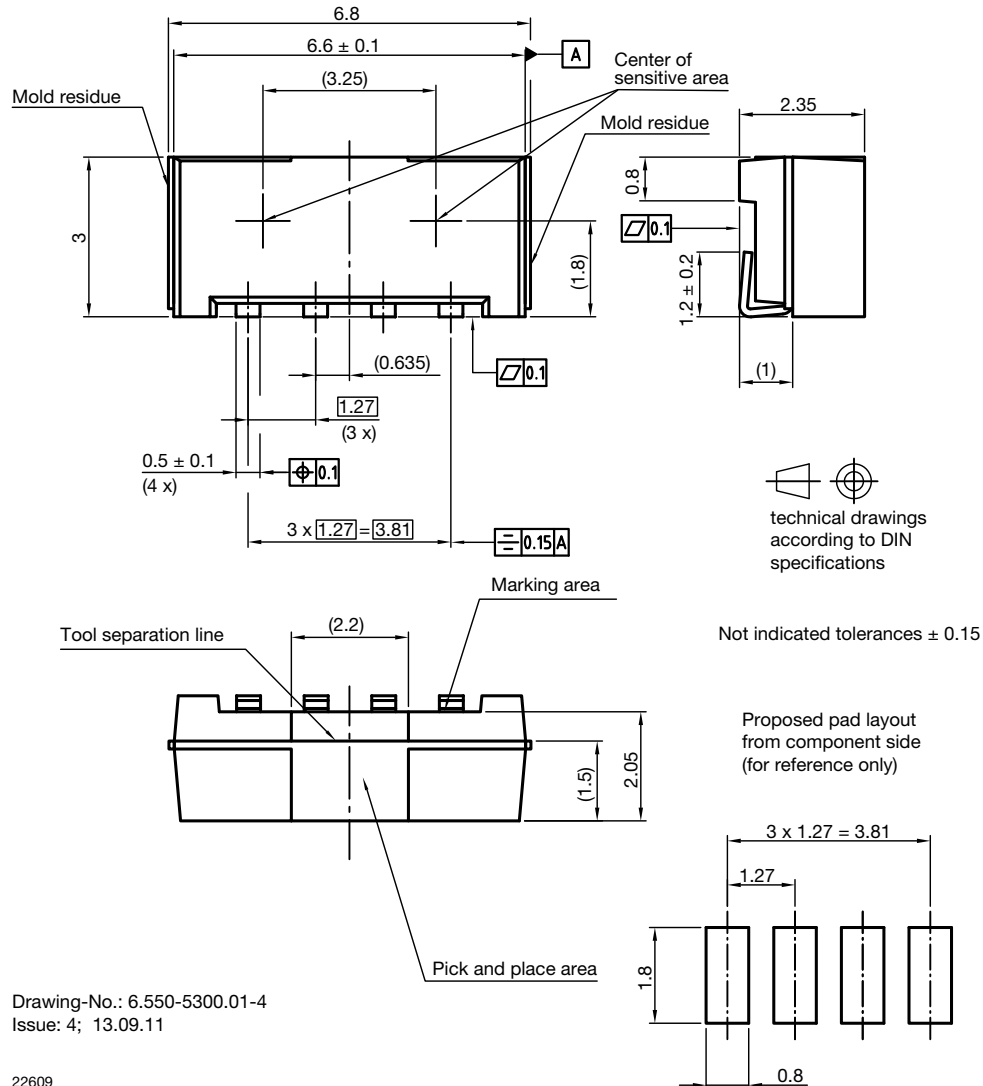

Drawing-No.: 6.550-5300.01-4  
Issue: 4; 13.09.11

22609

**ASSEMBLY INSTRUCTIONS**

**Reflow Soldering**


- Reflow soldering must be done within 72 h while stored under a max. temperature of 30 °C, 60 % RH after opening the dry pack envelope
- Set the furnace temperatures for pre-heating and heating in accordance with the reflow temperature profile as shown in the diagram. Exercise extreme care to keep the maximum temperature below 260 °C. The temperature shown in the profile means the temperature at the device surface. Since there is a temperature difference between the component and the circuit board, it should be verified that the temperature of the device is accurately being measured
- Handling after reflow should be done only after the work surface has been cooled off

**Manual Soldering**


- Use a soldering iron of 25 W or less. Adjust the temperature of the soldering iron below 300 °C
- Finish soldering within 3 s
- Handle products only after the temperature has cooled off




**VISHAY LEAD (Pb)-FREE REFLOW SOLDER PROFILE**

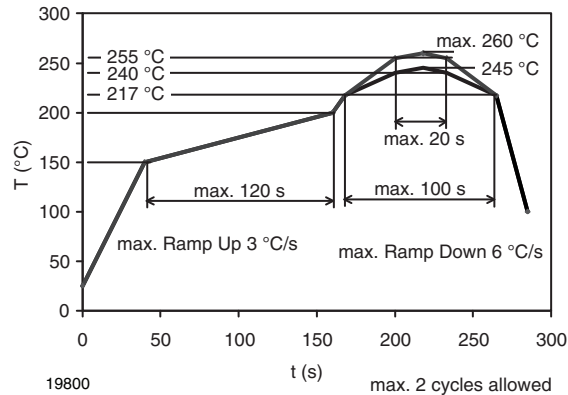


**TAPING VERSION TSOP..TR DIMENSIONS** in millimeters

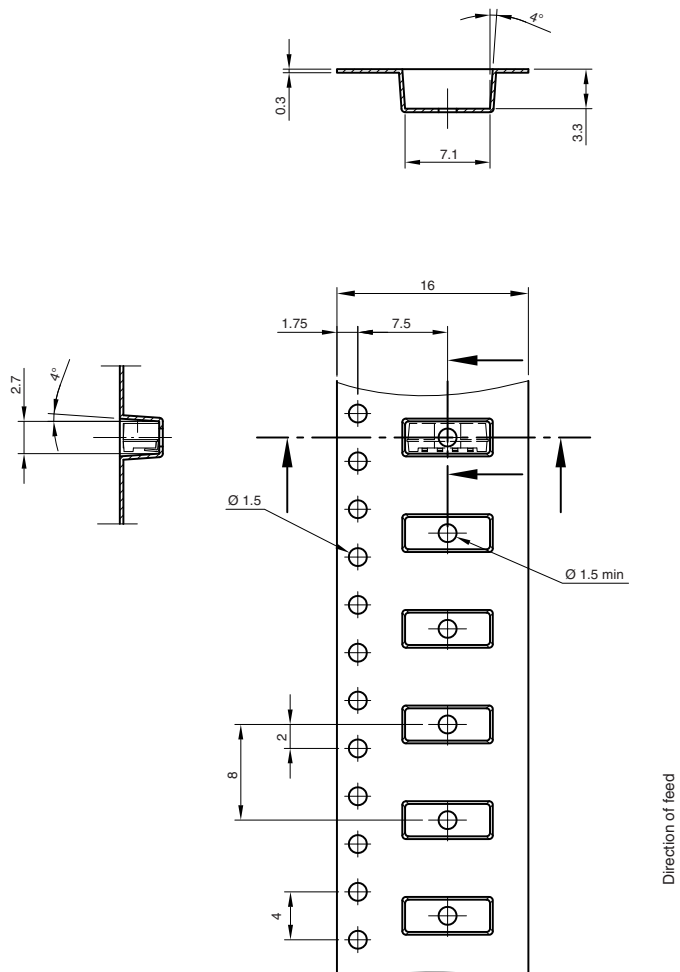

Drawing-No.: 9.700-5342.01-4  
Issue: 1: 23.03.09  
21785




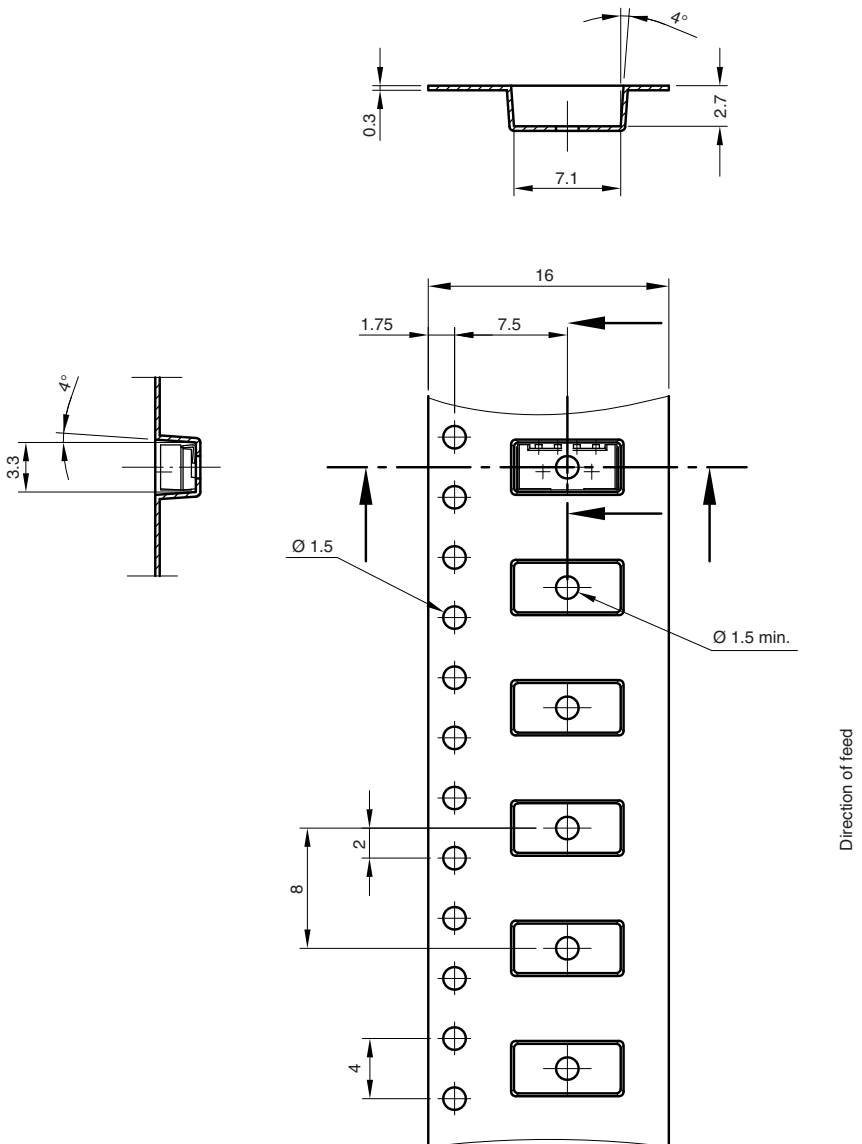






**REEL DIMENSIONS** in millimeters

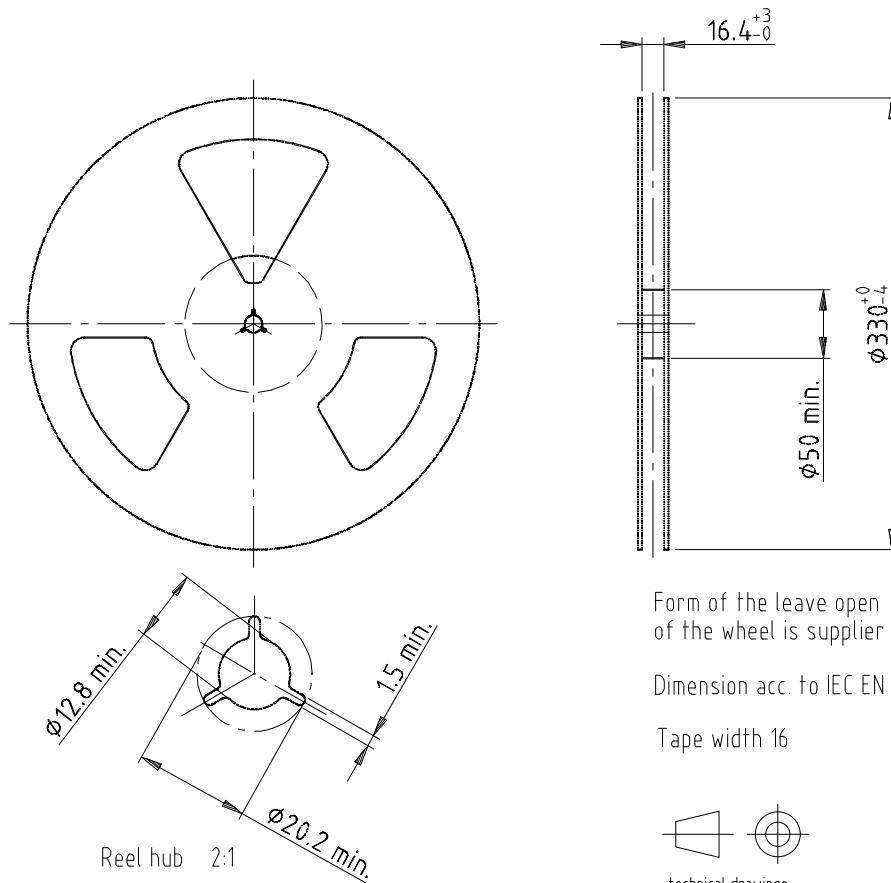

Form of the leave open of the wheel is supplier specific.

Dimension acc. to IEC EN 60 286-3

Tape width 16




Drawing-No.: 9.800-5052.V2-4

Issue: 1; 07.05.02

16734

**LEADER AND TRAILER DIMENSIONS** in millimeters

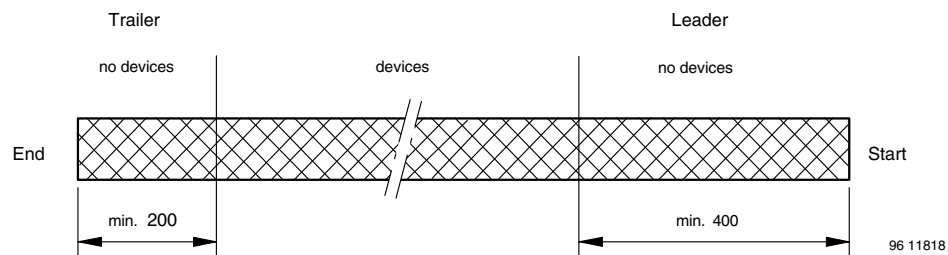

**COVER TAPE PEEL STRENGTH**

According to DIN EN 60286-3

0.1 N to 1.3 N

300 ± 10 mm/min.

165° to 180° peel angle

**LABEL**

**Standard bar code labels for finished goods**


The standard bar code labels are product labels and used for identification of goods. The finished goods are packed in final packing area. The standard packing units are labeled with standard bar code labels before transported as finished goods to warehouses. The labels are on each packing unit and contain Vishay Semiconductor GmbH specific data.

**VISHAY SEMICONDUCTOR GmbH STANDARD BAR CODE PRODUCT LABEL** (finished goods)

| PLAIN WRITING         | ABBREVIATION | LENGTH       |
|-----------------------|--------------|--------------|
| Item-description      | -            | 18           |
| Item-number           | INO          | 8            |
| Selection-code        | SEL          | 3            |
| LOT-/serial-number    | BATCH        | 10           |
| Data-code             | COD          | 3 (YWW)      |
| Plant-code            | PTC          | 2            |
| Quantity              | QTY          | 8            |
| Accepted by           | ACC          | -            |
| Packed by             | PCK          | -            |
| Mixed code indicator  | MIXED CODE   | -            |
| Origin                | xxxxxxx+     | Company logo |
| Long bar code top     | Type         | Length       |
| Item-number           | N            | 8            |
| Plant-code            | N            | 2            |
| Sequence-number       | X            | 3            |
| Quantity              | N            | 8            |
| Total length          | -            | 21           |
| Short bar code bottom | Type         | Length       |
| Selection-code        | X            | 3            |
| Data-code             | N            | 3            |
| Batch-number          | X            | 10           |
| Filter                | -            | 1            |
| Total length          | -            | 17           |

**DRY PACKING**

The reel is packed in an anti-humidity bag to protect the devices from absorbing moisture during transportation and storage.

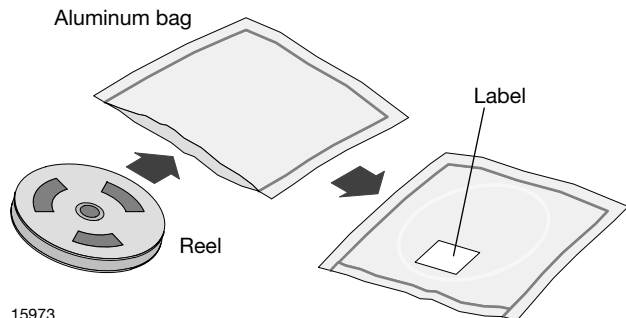**FINAL PACKING**

The sealed reel is packed into a cardboard box. A secondary cardboard box is used for shipping purposes.

**RECOMMENDED METHOD OF STORAGE**

Dry box storage is recommended as soon as the aluminum bag has been opened to prevent moisture absorption. The following conditions should be observed, if dry boxes are not available:

- Storage temperature 10 °C to 30 °C
- Storage humidity ≤ 60 % RH max.

After more than 72 h under these conditions moisture content will be too high for reflow soldering.

In case of moisture absorption, the devices will recover to the former condition by drying under the following condition:  
 192 h at 40 °C + 5 °C/- 0 °C and < 5 % RH (dry air/nitrogen)  
 or  
 96 h at 60 °C + 5 °C and < 5 % RH for all device containers  
 or  
 24 h at 125 °C + 5 °C not suitable for reel or tubes.

An EIA JEDEC standard JSTD-020 level 4 label is included on all dry bags.

|                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          |
|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
|                                                                         | <b>CAUTION</b><br>This bag contains<br><b>MOISTURE-SENSITIVE DEVICES</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>LEVEL</b><br><b>4</b> |
|                                                                         | <ol style="list-style-type: none"> <li>Shelf life in sealed bag: 12 months at &lt; 40 °C and &lt; 90 % relative humidity (RH)</li> <li>After this bag is opened, devices that will be subjected to soldering reflow or equivalent processing (peak package body temp. 260 °C) must be               <ol style="list-style-type: none"> <li>Mounted within 72 hours at factory condition of &lt; 30 °C/60 % RH or</li> <li>Stored at &lt; 5 % RH</li> </ol> </li> <li>Devices require baking before mounting if:<br/>               Humidity Indicator Card is &gt; 10 % when read at 23 °C ± 5 °C or 2a. or 2b. are not met.</li> <li>If baking is required, devices may be baked for:<br/>               192 hours at 40 °C + 5 °C/- 0 °C and &lt; 5 % RH (dry air/nitrogen) or<br/>               96 hours at 60 °C ± 5 °C and &lt; 5 % RH for all device containers or<br/>               24 hours at 125 °C ± 5 °C not suitable for reels or tubes</li> </ol> |                          |
| Bag Seal Date: _____<br>(If blank, see barcode label)                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          |
| Note: Level and body temperature defined by EIA JEDEC Standard JSTD-020 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          |

22522

EIA JEDEC standard JSTD-020 level 4 label  
is included on all dry bags



[www.vishay.com](http://www.vishay.com)

## TSOP752..W, TSOP754..W

Vishay Semiconductors

### ESD PRECAUTION

Proper storage and handling procedures should be followed to prevent ESD damage to the devices especially when they are removed from the antistatic shielding bag. Electro-static sensitive devices warning labels are on the packaging.

### VISHAY SEMICONDUCTORS STANDARD BAR CODE LABELS

The Vishay Semiconductors standard bar code labels are printed at final packing areas. The labels are on each packing unit and contain Vishay Semiconductors specific data.



22178



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331