


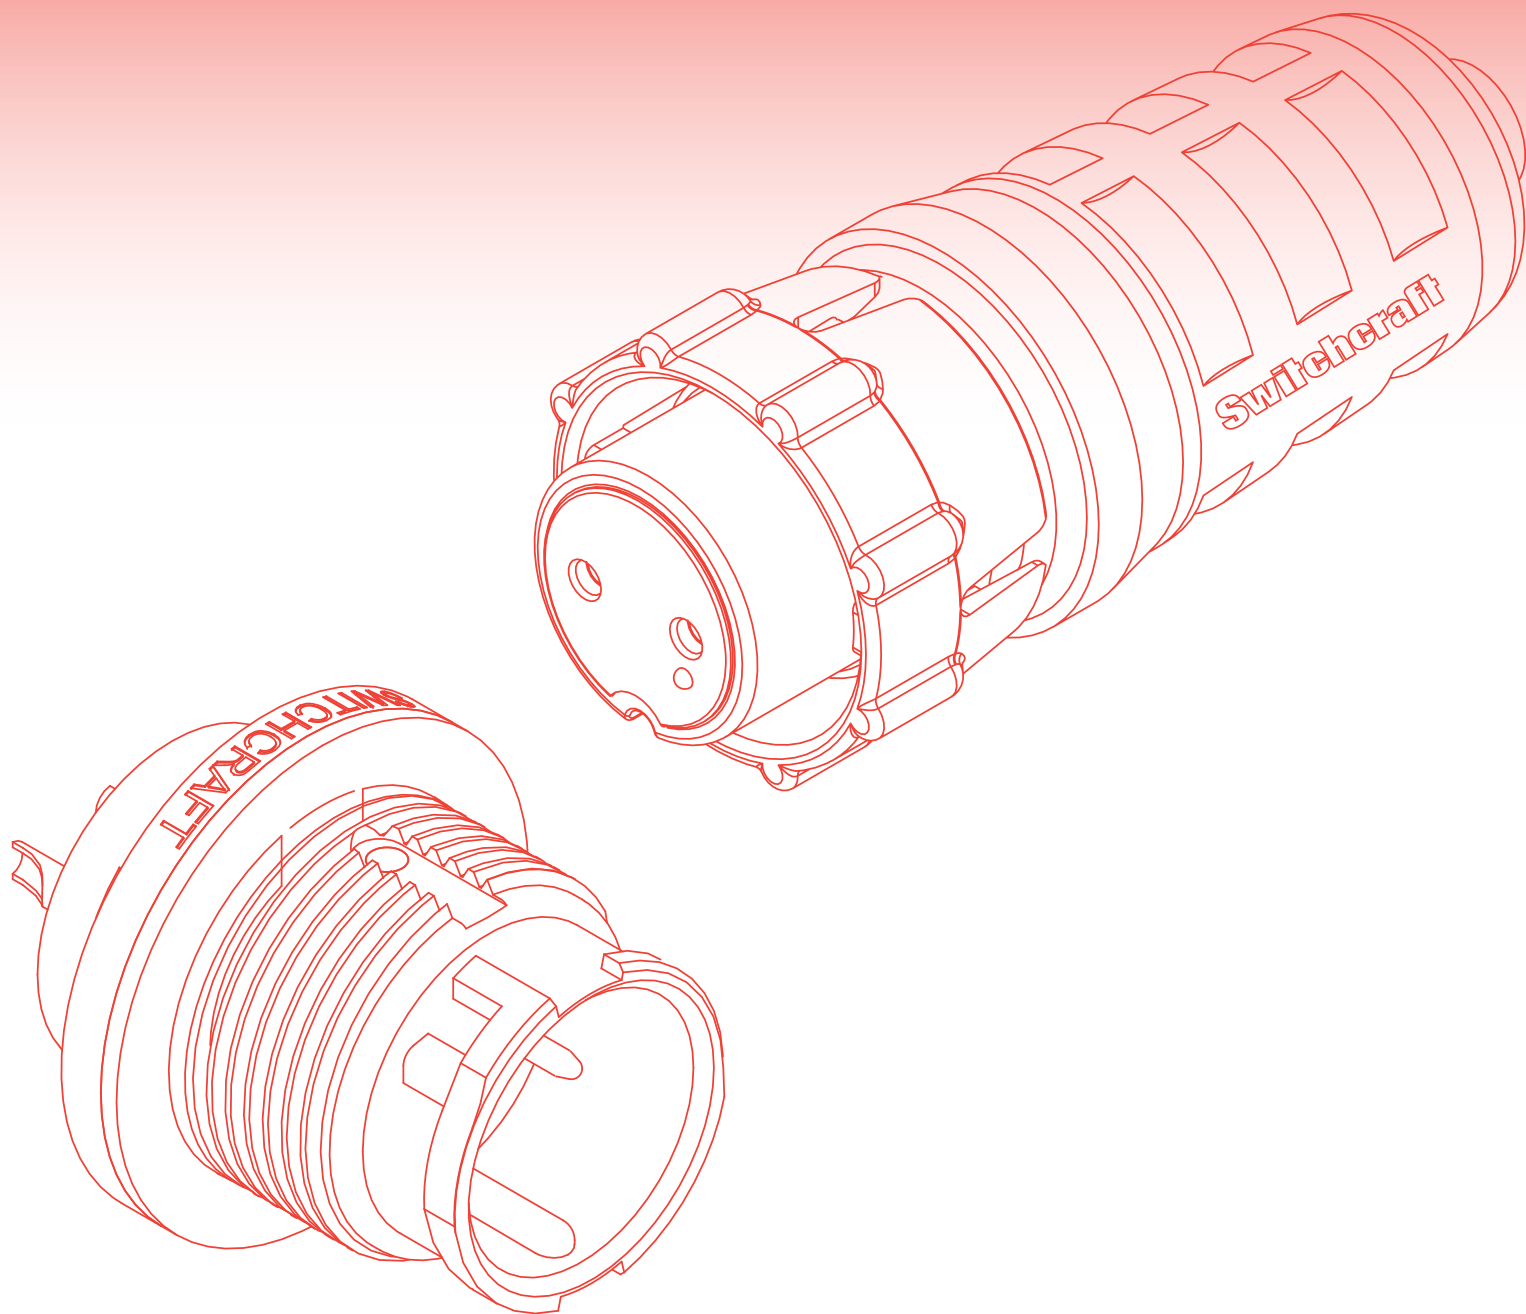

## EN3<sup>®</sup> SERIES WEATHERTIGHT CONNECTORS

NEW PRODUCT BULLETIN 602

# SWITCHCRAFT<sup>®</sup>

A H E I C O C O M P A N Y



Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.

# EN3® SERIES WEATHERTIGHT CONNECTORS

NEW PRODUCT BULLETIN 602



## FEATURES & BENEFITS

- Sealed to IP68 NEMA 250 (6P)
- Patented grommet & o-ring free design
- Available in ribbed or winged coupling ring
- Cable, panel & cable to cable options
- Gold plated contacts standard
- Solder, crimp & PC contact options
- Straight & right angle PC contact panel connectors

## APPLICATIONS

- Any sealed data transmission
- Military or industrial GPS location devices
- Instrumentation
- Medical data carts
- Marine Applications
- Transportation
- General industrial electronic applications



Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.

# EN3® SERIES WEATHERTIGHT CONNECTORS

## NEW PRODUCT BULLETIN 602

### SPECIFICATIONS

#### MECHANICAL SPECIFICATIONS

|                        |                                                                 |
|------------------------|-----------------------------------------------------------------|
| Life:                  | Minimum 600 insertion / withdrawal cycles                       |
| Vibration:             | Mil-Std 202 Method 201                                          |
| Shock:                 | Mil-Std 202 Method 213B, condition K                            |
| Hex Nut Torque:        | All series hex nut to withstand 8-10 in-lb tightening torque.   |
| Coupling Locking Style | Bayonet with ribbed coupling nut (winged coupling nut optional) |
| Back Shell Style:      | Boot                                                            |

#### ELECTRICAL SPECIFICATIONS

|                        |                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage Rating:        | 250 V AC/DC                                                                                                                                                                                                                                |
| Current Rating:        | 13.0 A – 2 or 3 #16 contacts accepts 16 through 18 AWG<br>7.5 A – 2 through 6 #20 contacts accepts 20 through 22 AWG<br>6.5 A – 7 or 8 #20 contacts accepts 20 through 22 AWG<br>3 A – 9 through 18 #26 contacts accepts 26 through 28 AWG |
| Insulation Resistance: | 100 MΩ min                                                                                                                                                                                                                                 |
| Contact Resistance:    | 20 mΩ max                                                                                                                                                                                                                                  |

#### ENVIRONMENTAL SPECIFICATIONS

|                               |                                                                                                     |
|-------------------------------|-----------------------------------------------------------------------------------------------------|
| Operating Temperature Rating: | -40°C to +65°C (-40°F to +149°F)                                                                    |
| Moisture Resistance:          | Mil-Std 202 Method 106F                                                                             |
| Insulation Resistance:        | Mil-Std 202 Method 302 condition B                                                                  |
| Thermal Shock:                | Mil-Std 202 Method 107G                                                                             |
| Salt Atmosphere (Corrosion):  | Mil-Std 202 Method 101D condition B                                                                 |
| Weathertight:                 | IEC 60529 IP16/IP18<br>IEC 60529 IP66/IP68<br>IEC 60529 IP68<br>NEMA 250 (6P)<br>CFR 46 Part 110.20 |

#### MATERIAL SPECIFICATIONS

|                                        |                                      |
|----------------------------------------|--------------------------------------|
| Panel connector shells & locking disk: | Thermoplastic UL94V-0                |
| Connector shell interior:              | Elastomeric, Black UL 94HB           |
| Contacts:                              | Copper Alloy, Gold over Nickel Plate |

#### MOLDED CABLE ASSEMBLIES

|               |                                                                              |
|---------------|------------------------------------------------------------------------------|
| Weathertight: | IEC 60529 IP66/IP68<br>IEC 60529 IP68<br>NEMA 250 (6P)<br>CFR 46 Part 110.20 |
|---------------|------------------------------------------------------------------------------|

#### CERTIFICATIONS

UL File E319753 ; 2-8 pin cord, in-line and panel only





Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.


# EN3® SERIES WEATHERTIGHT CONNECTORS

## NEW PRODUCT BULLETIN 602


### CORD CONNECTORS



EN3 SERIES 2-18 POSITION  
STANDARD  
CABLE CLAMP & BOOT

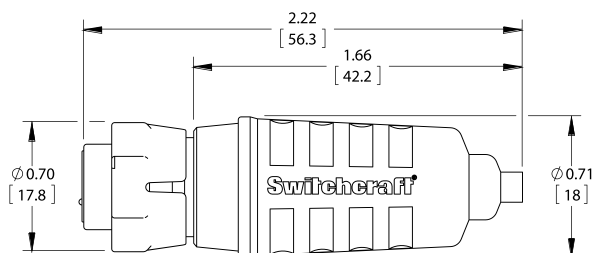


OPTION "L"  
EN3 SERIES 2-18 POSITION  
LARGE CABLE CLAMP & BOOT




OPTION "W"  
EN3 SERIES 2-18 POSITION  
WINGED COUPLING RING

### CABLE TO CABLE CONNECTORS

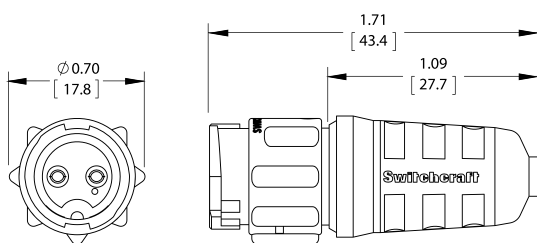


EN3 SERIES 2-18 POSITION  
STANDARD  
CABLE CLAMP & BOOT  
INLINE CONNECTOR

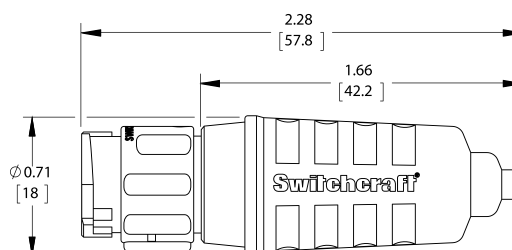

OPTION "L"  
EN3 SERIES 2-18 POSITION  
LARGE CABLE CLAMP & BOOT  
INLINE CONNECTOR

### EN3® RIGHT ANGLE 2-8 POSITION MOLDED CONNECTORS

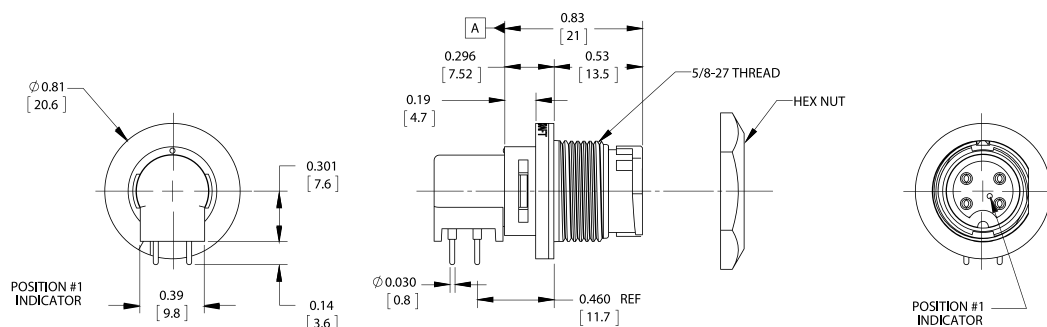


Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.


# EN3® SERIES WEATHERTIGHT CONNECTORS

## NEW PRODUCT BULLETIN 602

### PANEL CONNECTORS

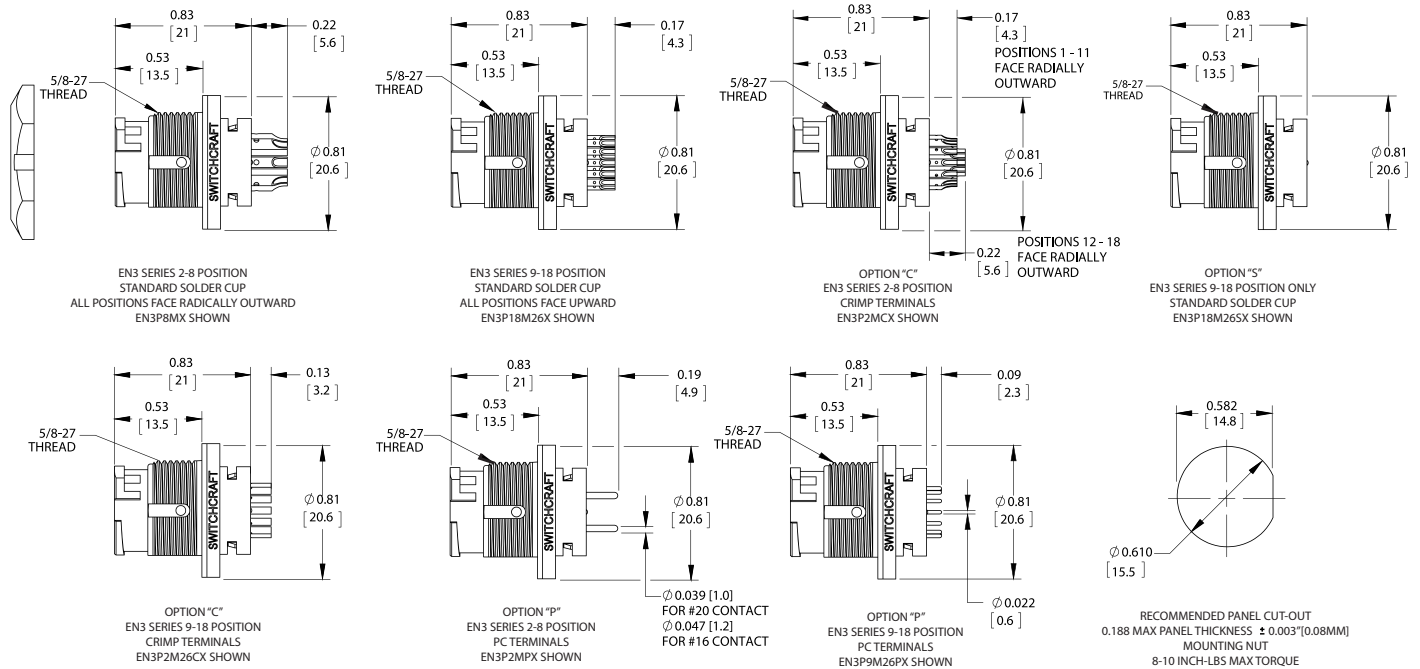

### RIGHT ANGLE PC BOARDS 2-18 CONTACT PANEL CONNECTORS

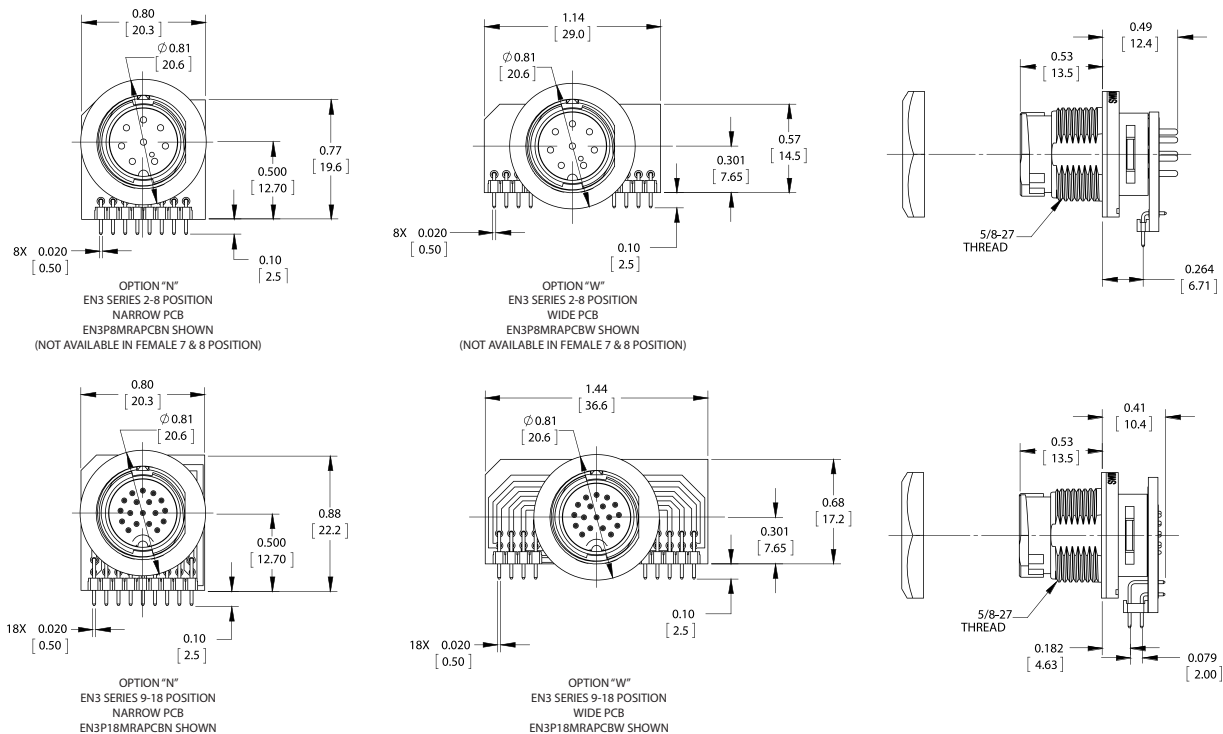


Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.


# EN3® SERIES WEATHERTIGHT CONNECTORS

## NEW PRODUCT BULLETIN 602

### EN3® ORDERING CODE

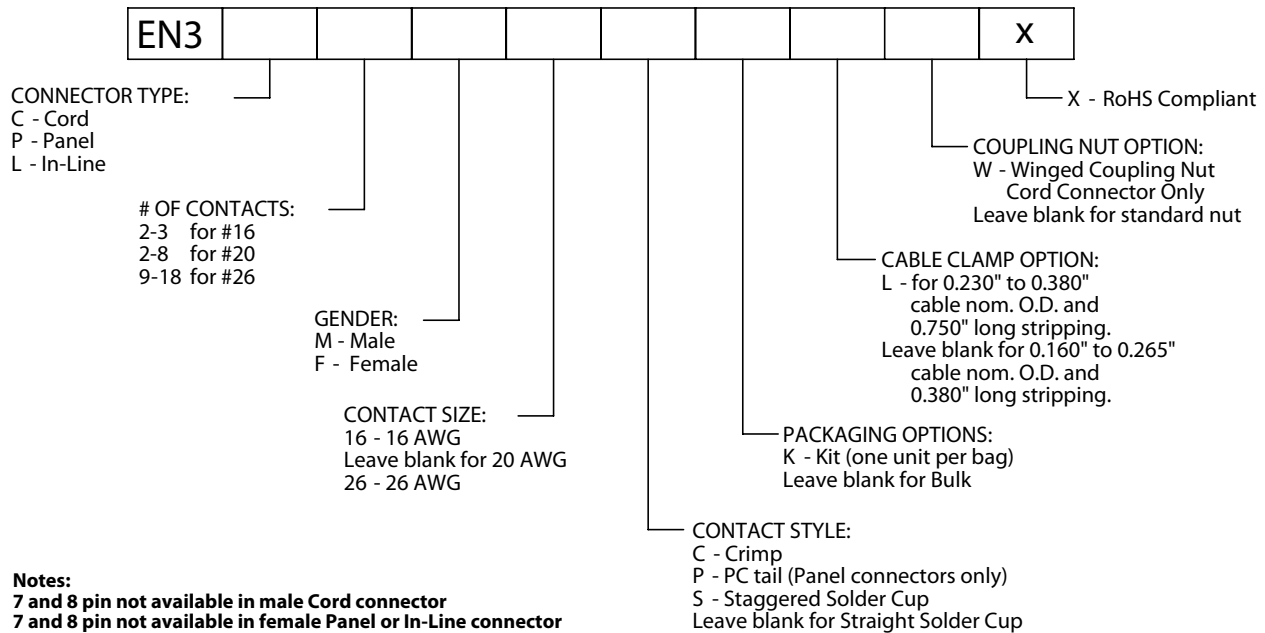

### EN3® RIGHT ANGLE PC BOARD MOUNT 2-18 CONTACT ORDERING CODE

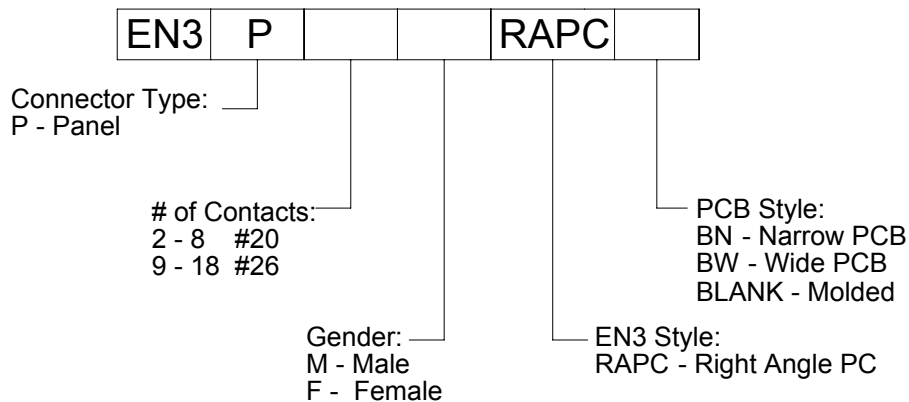

**Notes:**  
7 and 8 pin not available in female Panel connector

### EN3® SERIES ACCESSORIES

|                  |                                                                                  |
|------------------|----------------------------------------------------------------------------------|
| <b>EN3 BOOT</b>  | EN3 SERIES, REGULAR BOOT FOR CABLE DIAMETERS 0.160"-0.265"                       |
| <b>EN3 BOOTL</b> | EN3 SERIES, LARGE BOOT FOR CABLE DIAMETERS 0.230"-0.380"                         |
| <b>EN3CAP</b>    | EN3 HARSH ENVIRONMENT PANEL OR CABLE END CAP RATED TO IP68, RUBBER LANYARD STYLE |
| <b>EN3CAPC</b>   | CORD PLUG CAP FOR EN3 SERIES                                                     |
| <b>EN3CLAMPX</b> | EN3 HARSH ENVIRONMENT CABLE CLAMP                                                |
| <b>EN3IPCAPX</b> | EN3 SERIES, IP68 RATED PANEL OR INLINE CAP WITH LOCK RING                        |
| <b>EN3NUT</b>    | EN3 HARSH ENVIRONMENT HARDWARE-NUT                                               |
| <b>EN3PQCA</b>   | EN3 PANEL ADAPTOR, FOR USE WITH EN3 QUICK CONNECT/ DISCONNECT CABLE ASSEMBLIES   |



Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331