


XLR8TM

ARDUINO-COMPATIBLE FPGA APPLICATION ACCELERATOR & DEVELOPMENT BOARD

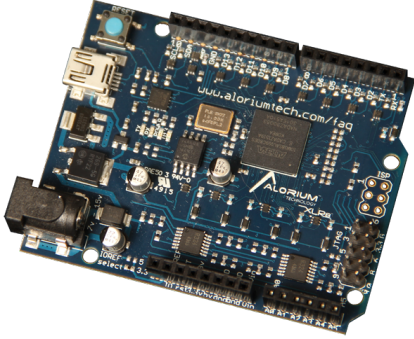

Introducing XLR8

XLR8 is a drop-in replacement for an Arduino Uno with an interesting twist. It is an Arduino-compatible board that uses a Field-Programmable Gate Array (FPGA) as the main processing chip.

The FPGA provides a reconfigurable hardware platform that hosts an ATmega328 instruction set compatible microcontroller. The FPGA also provides the ability to implement custom logic that accelerates specific functionality that is slow, problematic or even impossible for an 8-bit microcontroller.

The FPGA-based hardware acceleration and offload provided by XLR8 results in significantly improved performance in the same physical footprint and using the same tool chain as standard Arduino Uno boards.

XLR8 is a great solution for accelerating your Arduino-based applications and projects!

XLR8 ADVANTAGES

Faster

Hardware-accelerated functions run in a fraction of the clock cycles required to execute the same function in software.

This results in faster overall application performance.

High-Performance

Shorter times to complete complex tasks in hardware result in more clock cycles available for additional software functions.

This effectively improves overall computational performance.

Scalable

The functionality and capabilities accelerated in the FPGA hardware can be expanded and scaled for many different applications.

We are just scratching the surface of what is possible to accelerate!

Xcelerator Blocks

An Xcelerator Block (XB) is an optimized hardware implementation of a unique processor-intensive function. Basically, an XB is a custom piece of hardware, implemented on the same FPGA fabric and tightly integrated with the microcontroller. XBs can access the same register space and even integrate with the instructions of the microcontroller.

Available XBs

XLR8 ships with pre-installed XBs that target application-specific behavior, and the board can be field-updated to change the XBs implemented on the FPGA.

The default XLR8 configuration will include XBs for:

- Floating Point Math
- Servo Control
- NeoPixel Control

XB Roadmap

Future XBs will be implemented based on feedback from early adopters and new potential customers.

Additional XBs on our roadmap:


- Proportional-Integral-Derivative (PID) control
- Event Counters and Timers
- Quadrature Encoders/Decoders
- Pulse Width Modulation (PWM)
- Multiple UARTS
- Enhanced Analog-to-Digital Functionality

User-Created Xcelerator Blocks

Out of the gate, the primary goal is to provide an FPGA-based board that is a drop-in replacement for the Arduino Uno. XLR8 supports FPGA image updates via the USB port, and there is also a JTAG footprint on the board so that more advanced FPGA users could use a JTAG programmer to talk to the FPGA directly.

The microcontroller core that we have developed has been designed to be easily extendable, and Alorium Technology is actively developing the support model for users who want to create their own XBs and interface to the on-chip microcontroller.

In the near future, we plan to provide access to enough source code and documentation to make it possible for someone proficient with Verilog or VHDL and Altera's Quartus Prime software to create their own XBs. The sky's the limit on what can be done, and the XBs created this way can be shared with the rest of the XLR8 community.

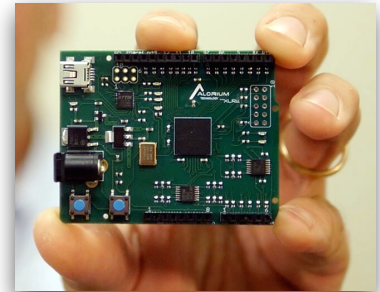

The Rev 1 XLR8 Prototype

TECHNICAL SPECS

Physical Dimensions

- Based on the Arduino Uno
- Matches the Uno's physical footprint - including pin headers for attaching shields
- Mounting brackets or shields that fit Uno will also fit XLR8

Digital I/O

- 5V inputs
- 3.3V outputs

Analog Inputs

- 5V tolerant
- Op-amp circuit emulates 0-5V behavior of the ADCs on the Arduino Uno
- Correct ADC results regardless of whether it's powered from USB or from the barrel connector
- Performance: 1 MHz
- Resolution: 12-bit sustained
- Sample Rate: 154k samples/second

Specification Table

Microcontroller	ATmega328- Compatible
Operating Voltage	3.3V with 5V I/O
Input Voltage	7-12V
Digital I/O Pins	14
PWM Digital I/O Pins	6
Analog Input Pins	6
Flash Memory	32 KB
SRAM	2 KB
Clock Speed	16/32 MHz

Contact

Alorium Technology
715.575.3150

www.aloriumtech.com



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331