

NSVR201MX

Schottky Barrier Diode for Mixer and Detector

Automotive Schottky Barrier Diode designed for compact and efficient designs. AEC-Q101 qualified Schottky Barrier Diode and PPAP capable suitable for automotive applications.

Features

- Small Interterminal Capacitance
- Less Parasitic Components
- Small Forward Voltage
- Small-sized Package
- Pb-Free, Halogen Free and RoHS Compliant
- AEC-Q101 Qualified and PPAP Capable

Typical Applications

- Microwave and Submilliwave Mixer
- Microwave and Submilliwave Detector

Specifications

Table 1. ABSOLUTE MAXIMUM RATINGS at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	2	V
Forward Current	I_F	50	mA
Operating Junction and Storage Temperature	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



ON Semiconductor®


www.onsemi.com

2 V, 50 mA
 $C = 0.15 \text{ pF typ.}$
Schottky Barrier Diode



X2DFN2 1.0 x 0.6, 0.65P
CASE 714AB

ELECTRICAL CONNECTION



MARKING DIAGRAM



RF = Specific Device Code
M = Date Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

NSVR201MX

Table 2. ORDERING INFORMATION

Device	Marking	Package	Shipping†
NSVR201MXT5G	RF	X2DFN2 1.0 x 0.65 P (Pb-Free / Halogen Free)	8,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

Table 3. ELECTRICAL CHARACTERISTICS at $T_A = 25^\circ\text{C}$ (Notes 1, 2)

Parameter	Symbol	Conditions	Value			Units
			Min	Typ	Max	
Reverse Voltage	V_R	$I_R = 10\ \mu\text{A}$	2			V
Forward Voltage	V_F	$I_F = 1\ \text{mA}$			320	mA
Series Resistance	R_S	$I_F = 10\ \text{mA}$		14	18	Ω
Interterminal Capacitance	C	$V_R = 0\ \text{V}$, $f = 1\ \text{MHz}$		0.15	0.20	pF

1. Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
2. Pay attention to handling since it is liable to be affected by static electricity due to the high-frequency process adopted.

NSVR201MX







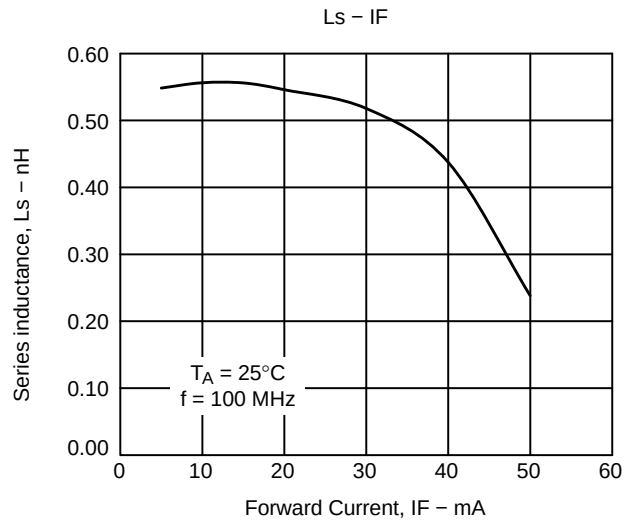


Figure 1.

NSVR201MX

Table 4. S PARAMETER ($Z_0 = 50 \Omega$)


Freq [GHz]	I = 0 mA		I = 0.02 mA		I = 0.05 mA		I = 0.1 mA		I = 0.2 mA		I = 0.5 mA	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1	0.964	-4.4	0.988	-4.3	0.978	-4.3	0.963	-4.3	0.933	-4.4	0.845	-4.3
2	0.967	-9.7	0.990	-9.6	0.981	-9.6	0.966	-9.7	0.937	-9.7	0.852	-9.5
3	0.957	-15.2	0.981	-15.1	0.971	-15.2	0.956	-15.2	0.925	-15.4	0.838	-15.7
4	0.956	-20.5	0.980	-20.3	0.970	-20.5	0.956	-20.5	0.925	-20.6	0.840	-20.4
5	0.961	-26.0	0.986	-25.7	0.977	-25.9	0.960	-26.0	0.929	-26.2	0.838	-26.3
6	0.954	-32.3	0.981	-31.9	0.970	-32.1	0.953	-32.3	0.919	-32.5	0.822	-32.5
7	0.943	-39.2	0.969	-38.7	0.959	-39.0	0.942	-39.2	0.909	-39.6	0.814	-40.4
8	0.943	-45.7	0.967	-45.2	0.958	-45.4	0.942	-45.7	0.911	-46.2	0.823	-47.4
9	0.947	-52.8	0.975	-52.2	0.963	-52.5	0.946	-52.8	0.910	-53.3	0.809	-54.2
10	0.940	-60.6	0.968	-59.9	0.957	-60.2	0.938	-60.6	0.902	-61.2	0.799	-62.6
11	0.921	-69.7	0.950	-68.9	0.939	-69.3	0.919	-69.7	0.883	-70.4	0.777	-72.0
12	0.895	-80.4	0.928	-79.4	0.914	-79.9	0.893	-80.4	0.852	-81.2	0.738	-83.5
13	0.882	-88.8	0.912	-87.7	0.900	-88.2	0.881	-88.8	0.843	-89.6	0.735	267.9
14	0.872	261.9	0.906	263.1	0.893	262.4	0.871	261.9	0.831	261.0	0.715	258.8
15	0.870	252.7	0.900	253.9	0.887	253.2	0.868	252.6	0.830	251.6	0.723	249.0
16	0.874	242.8	0.903	244.1	0.891	243.4	0.873	242.7	0.838	241.6	0.733	238.1
17	0.874	231.6	0.907	233.1	0.894	232.3	0.873	231.6	0.833	230.4	0.720	227.0
18	0.877	220.8	0.911	222.5	0.898	221.6	0.875	220.7	0.833	219.3	0.715	215.4
19	0.860	210.3	0.895	212.1	0.881	211.1	0.859	210.2	0.817	208.7	0.700	204.2
20	0.847	198.7	0.880	200.7	0.866	199.6	0.845	198.7	0.806	197.2	0.692	192.7
21	0.841	185.5	0.875	187.4	0.860	186.4	0.840	185.4	0.800	184.0	0.687	179.7
22	0.847	171.1	0.883	173.3	0.868	172.2	0.846	171.1	0.803	169.3	0.683	164.0
23	0.845	157.2	0.877	159.6	0.864	158.3	0.843	157.1	0.804	155.1	0.696	149.5
24	0.822	142.0	0.854	144.5	0.840	143.2	0.821	142.1	0.782	140.1	0.680	134.7
25	0.823	130.3	0.852	132.6	0.840	131.4	0.822	130.3	0.788	128.6	0.695	123.3
26	0.833	118.3	0.863	120.7	0.850	119.5	0.832	118.2	0.797	116.5	0.703	111.1

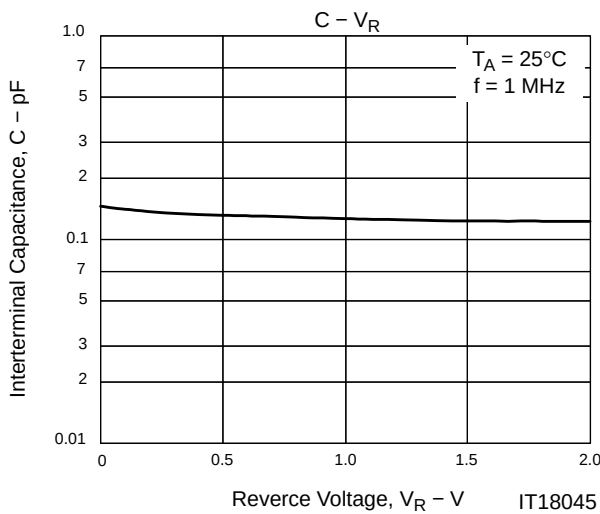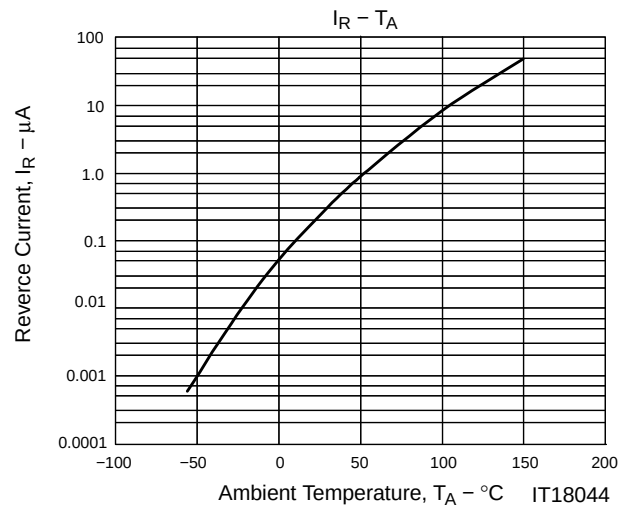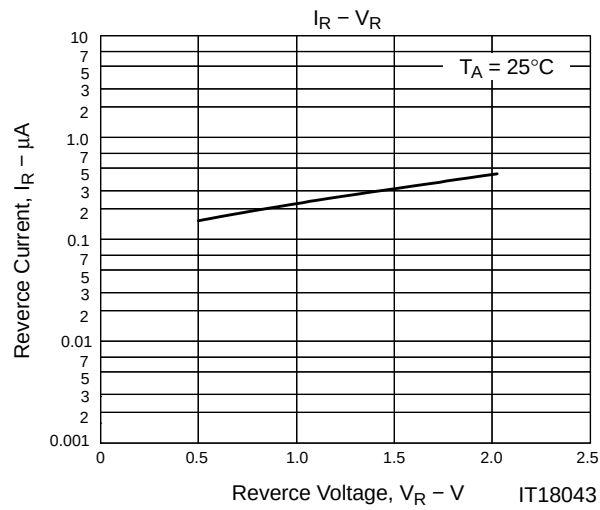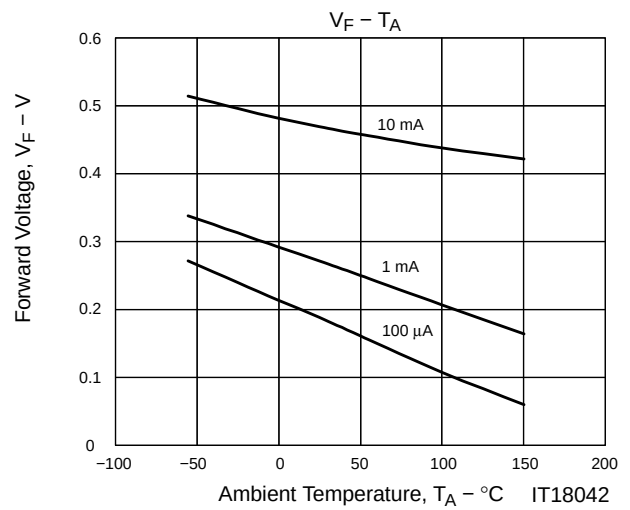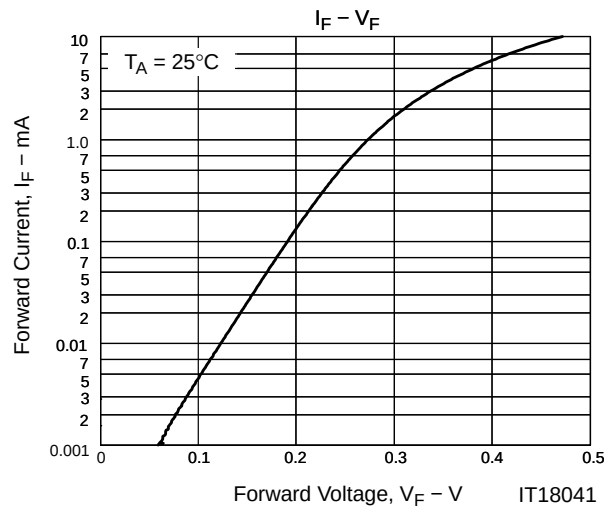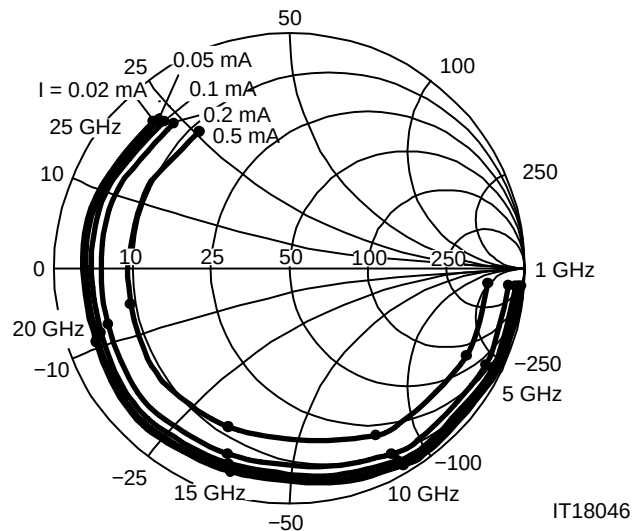


NSVR201MX

PACKAGE DIMENSIONS


X2DFN2 1.0 x 0.6, 0.65P
CASE 714AB
ISSUE B

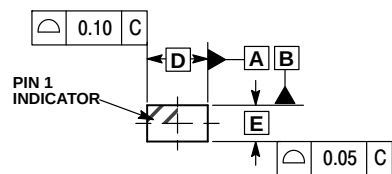

TOP VIEW

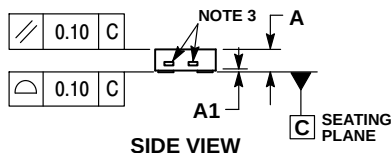

SIDE VIEW

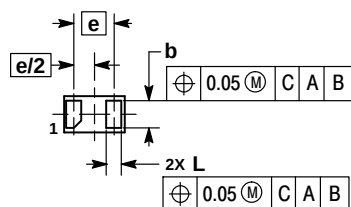


BOTTOM VIEW

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. EXPOSED COPPER ALLOWED AS SHOWN.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	0.34	0.37	0.40
A1	—	0.03	0.05
b	0.45	0.50	0.55
D	0.95	1.00	1.05
E	0.55	0.60	0.65
e	0.65 BSC		
L	0.20	0.25	0.30

RECOMMENDED SOLDER FOOTPRINT*



DIMENSIONS: MILLIMETERS

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marketing.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331