

**HF RoHS Fixed Voltage TwinSLIC™ Series - Modified DO-214**



**Description**

Fixed Voltage Series Modified DO-214 are uni-directional SIDACTor® devices designed to protect SLICs (Subscriber Line Interface Circuit) from damaging overvoltage transients.

The series provides single port protection using fixed voltage switching devices for negative surges. All positive surges are routed through internal diodes to a ground reference.


**Features and Benefits**

- Low voltage overshoot
- Low on-state voltage
- Does not degrade with use
- Fails short circuit when surged in excess of ratings
- Integrated diodes for positive voltage surges
- Single-port protection

**Agency Approvals**

| Agency | Agency File Number |
|--------|--------------------|
|        | E133083            |

**Pinout Designation**




**Applicable Global Standards**

- TIA-968-A
- TIA-968-B
- ITU K.20/21 Enhanced Level
- ITU K.20/21 Basic Level
- GR 1089 Inter-building\*
- GR 1089 Intra-building\*
- IEC 61000-4-5
- YD/T 1082
- YD/T 993
- YD/T 950

\* Series resistance required

**Schematic Symbol**



**Electrical Characteristics**

| Part Number | Marking | $V_{DRM}$            | $V_S$          | $I_H$  | $I_S$  | $I_T$ | $V_T$              | $V_F$ | Capacitance                  |
|-------------|---------|----------------------|----------------|--------|--------|-------|--------------------|-------|------------------------------|
|             |         | @ $I_{DRM} = 5\mu A$ | @ $100V/\mu s$ |        |        |       | @ $I_T = 2.2$ Amps |       |                              |
|             |         | V min                | V max          | mA min | mA max | A max | V max              | V max |                              |
|             |         | Pin 1-2, 3-2         |                |        |        |       |                    |       |                              |
| P0641CA2LRP | P62A    | 58                   | 77             | 120    | 800    | 2.2   | 4                  | 5     | See Capacitance Values table |
| P0721CA2LRP | P72A    | 65                   | 88             | 120    | 800    | 2.2   | 4                  | 5     |                              |
| P0901CA2LRP | P92A    | 75                   | 98             | 120    | 800    | 2.2   | 4                  | 5     |                              |
| P1101CA2LRP | P02A    | 95                   | 130            | 120    | 800    | 2.2   | 4                  | 5     |                              |
| P1301CA2LRP | P131A   | 120                  | 160            | 120    | 800    | 2.2   | 4                  | 5     |                              |
| P1701CA2LRP | P17A    | 160                  | 200            | 120    | 800    | 2.2   | 4                  | 5     |                              |

Notes:  
 - Absolute maximum ratings measured at  $T_A = 25^\circ C$  (unless otherwise noted).  
 - Devices are uni-directional

**Capacitance Values**

| Part Number | pF<br>Pin 1-2 / 3-2<br>Tip-Ground, Ring-Ground |     | pF<br>Pin 1-3<br>Tip-Ring |     |
|-------------|------------------------------------------------|-----|---------------------------|-----|
|             | MIN                                            | MAX | MIN                       | MAX |
|             | P0641CA2LRP                                    | 40  | 70                        | 20  |
| P0721CA2LRP | 35                                             | 70  | 20                        | 45  |
| P0901CA2LRP | 30                                             | 65  | 20                        | 40  |
| P1101CA2LRP | 25                                             | 55  | 15                        | 35  |
| P1301CA2LRP | 25                                             | 45  | 15                        | 30  |
| P1701CA2LRP | 25                                             | 40  | 15                        | 25  |

Note: Off-state capacitance ( $C_o$ ) is measured at 1 MHz with a 2 V bias.

**Surge Ratings**


| Series | $I_{PP}$                                     |                                        |                                          |                                            |                                            |                                          |                                            |                                              |                                           | $I_{TSM}$<br>50/60 Hz | di/dt |
|--------|----------------------------------------------|----------------------------------------|------------------------------------------|--------------------------------------------|--------------------------------------------|------------------------------------------|--------------------------------------------|----------------------------------------------|-------------------------------------------|-----------------------|-------|
|        | 0.2x310 <sup>1</sup><br>0.5x700 <sup>2</sup> | 2x10 <sup>1</sup><br>2x10 <sup>2</sup> | 8x20 <sup>1</sup><br>1.2x50 <sup>2</sup> | 10x160 <sup>1</sup><br>10x160 <sup>2</sup> | 10x560 <sup>1</sup><br>10x560 <sup>2</sup> | 5x320 <sup>1</sup><br>9x720 <sup>2</sup> | 10x360 <sup>1</sup><br>10x360 <sup>2</sup> | 10x1000 <sup>1</sup><br>10x1000 <sup>2</sup> | 5x310 <sup>1</sup><br>10x700 <sup>2</sup> |                       |       |
|        | A min                                        | A min                                  | A min                                    | A min                                      | A min                                      | A min                                    | A min                                      | A min                                        | A min                                     |                       |       |
| A      | 20                                           | 150                                    | 150                                      | 90                                         | 50                                         | 75                                       | 75                                         | 45                                           | 75                                        | 20                    | 500   |

Notes:


- Peak pulse current rating ( $I_{pp}$ ) is repetitive and guaranteed for the life of the product.
- $I_{pp}$  ratings applicable over temperature range of -40°C to +85°C
- The device must initially be in thermal equilibrium with -40°C ≤  $T_j$  ≤ +150°C

- 1 Current waveform in μs
- 2 Voltage waveform in μs


**Thermal Considerations**

| Package                                                                                                                             | Symbol          | Parameter                               | Value       | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------|-------------|------|
| Modified DO-214AA<br>Pin 3<br><br>Pin 1<br>Pin 2 | $T_j$           | Operating Junction Temperature Range    | -40 to +150 | °C   |
|                                                                                                                                     | $T_s$           | Storage Temperature Range               | -65 to +150 | °C   |
|                                                                                                                                     | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 85          | °C/W |


**V-I Characteristics**

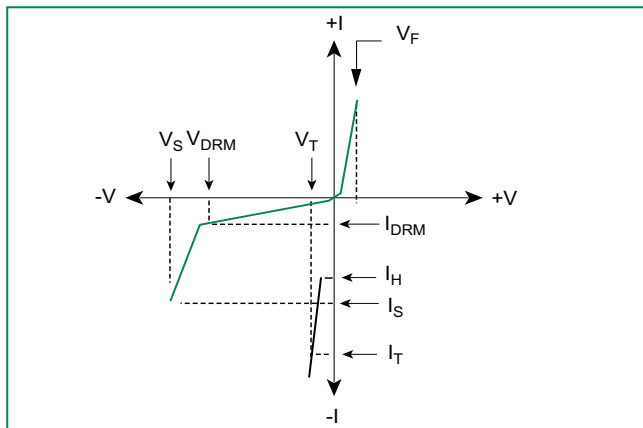


**$t_r \times t_d$  Pulse Waveform**

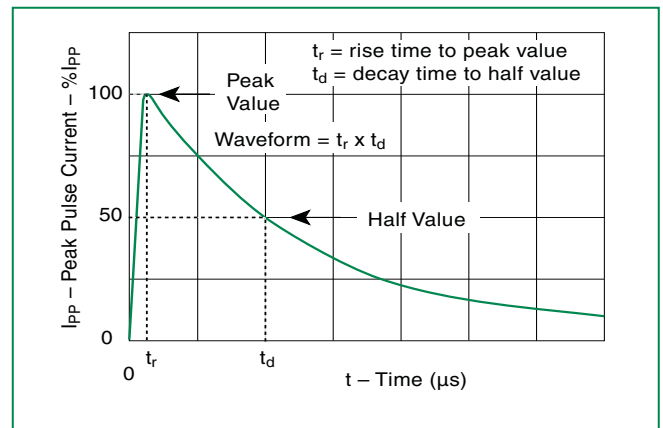

**Normalized  $V_s$  Change vs. Junction Temperature**

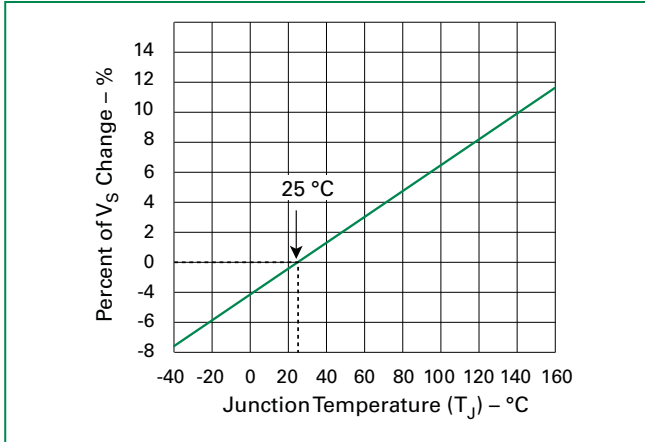


**Normalized DC Holding Current vs. Case Temperature**

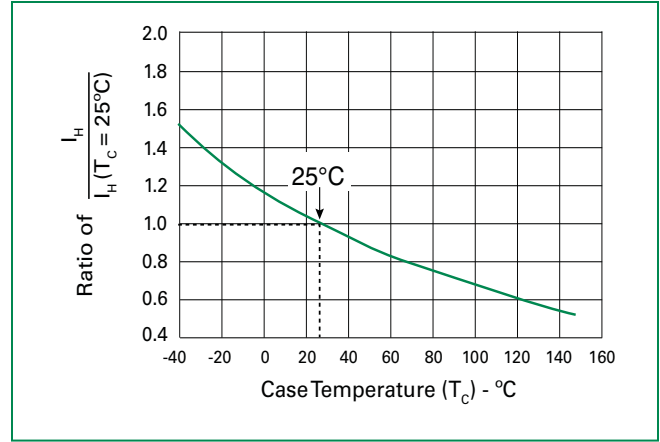

**Soldering Parameters**

|                                                        |                                    |                               |
|--------------------------------------------------------|------------------------------------|-------------------------------|
| Reflow Condition                                       |                                    | Pb-Free assembly (see Fig. 1) |
| Pre Heat                                               | -Temperature Min ( $T_{s(\min)}$ ) | +150°C                        |
|                                                        | -Temperature Max ( $T_{s(\max)}$ ) | +200°C                        |
|                                                        | -Time (Min to Max) ( $t_s$ )       | 60-180 secs.                  |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/sec. Max.                 |
| $T_{s(\max)}$ to $T_L$ - Ramp-up Rate                  |                                    | 3°C/sec. Max.                 |
| Reflow                                                 | -Temperature ( $T_L$ ) (Liquidus)  | +217°C                        |
|                                                        | -Temperature ( $t_L$ )             | 60-150 secs.                  |
| Peak Temp ( $T_p$ )                                    |                                    | +260(+0/-5)°C                 |
| Time within 5°C of actual Peak Temp ( $t_p$ )          |                                    | 30 secs. Max.                 |
| Ramp-down Rate                                         |                                    | 6°C/sec. Max.                 |
| Time 25°C to Peak Temp ( $T_p$ )                       |                                    | 8 min. Max.                   |
| Do not exceed                                          |                                    | +260°C                        |

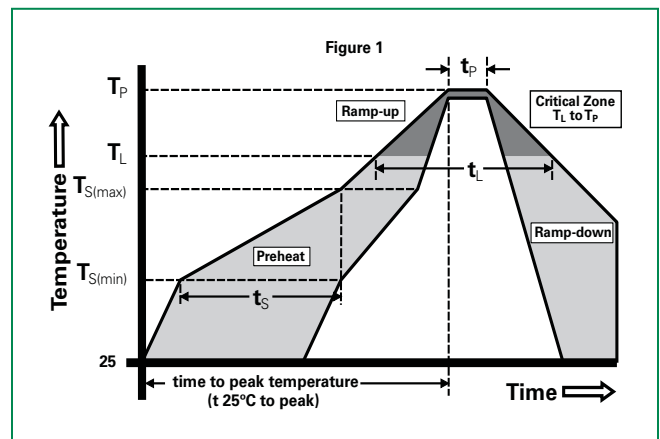


**Physical Specifications**

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| <b>Lead Material</b>   | Copper Alloy                                                  |
| <b>Terminal Finish</b> | 100% Matte-Tin Plated                                         |
| <b>Body Material</b>   | UL recognized epoxy meeting flammability classification 94V-0 |


**Environmental Specifications**

|                                         |                                                                                                                       |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>High Temp Voltage Blocking</b>       | 80% Rated $V_{DRM}$ ( $V_{AC}$ Peak) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| <b>Temp Cycling</b>                     | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A104                 |
| <b>Biased Temp &amp; Humidity</b>       | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101                                                |
| <b>High Temp Storage</b>                | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101                                                        |
| <b>Low Temp Storage</b>                 | -65°C, 1008 hrs.                                                                                                      |
| <b>Thermal Shock</b>                    | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106               |
| <b>Autoclave (Pressure Cooker Test)</b> | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102                                                       |
| <b>Resistance to Solder Heat</b>        | +260°C, 30 secs. MIL-STD-750 (Method 2031)                                                                            |
| <b>Moisture Sensitivity Level</b>       | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C peak). JEDEC-J-STD-020, Level 1                                       |


**Part Numbering**

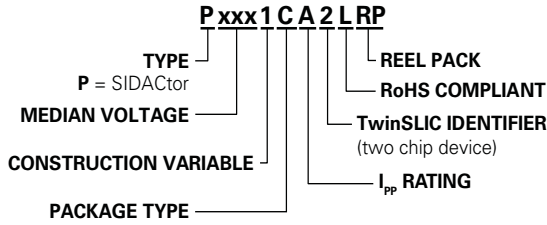

**Part Marking**

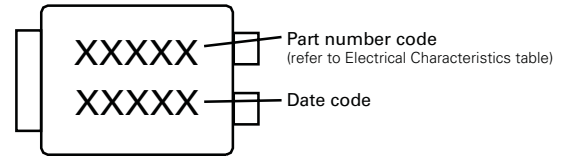

**Dimensions — Modified DO-214AA**

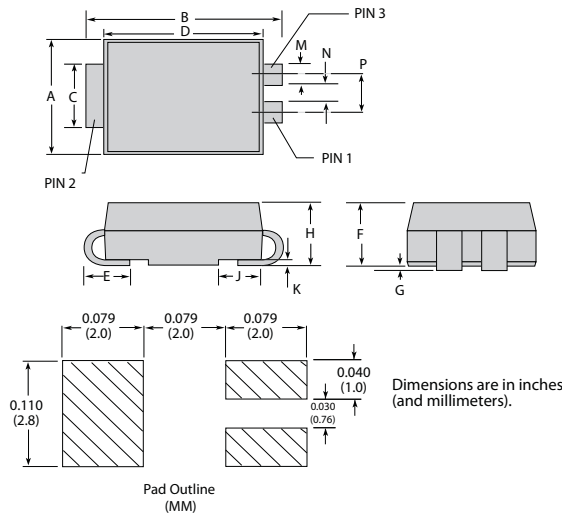


| Dimensions | Inches |       | Millimeters |      |
|------------|--------|-------|-------------|------|
|            | Min    | Max   | Min         | Max  |
| <b>A</b>   | 0.130  | 0.156 | 3.30        | 3.95 |
| <b>B</b>   | 0.201  | 0.220 | 5.10        | 5.60 |
| <b>C</b>   | 0.077  | 0.087 | 1.95        | 2.20 |
| <b>D</b>   | 0.159  | 0.181 | 4.05        | 4.60 |
| <b>E</b>   | 0.030  | 0.063 | 0.75        | 1.60 |
| <b>F</b>   | 0.075  | 0.096 | 1.90        | 2.45 |
| <b>G</b>   | 0.002  | 0.008 | 0.05        | 0.20 |
| <b>H</b>   | 0.077  | 0.104 | 1.95        | 2.65 |
| <b>K</b>   | 0.006  | 0.016 | 0.15        | 0.41 |
| <b>M</b>   | 0.022  | 0.028 | 0.56        | 0.71 |
| <b>N</b>   | 0.027  | 0.033 | 0.69        | 0.84 |
| <b>P</b>   | 0.052  | 0.058 | 1.32        | 1.47 |

**Packing Options**

| Package Type | Description                                   | Quantity | Added Suffix | Industry Standard |
|--------------|-----------------------------------------------|----------|--------------|-------------------|
| C            | Modified DO-214AA 3-leaded Tape and Reel Pack | 2500     | RP           | EIA-481-D         |

**Tape and Reel Specification — Modified DO-214AA**

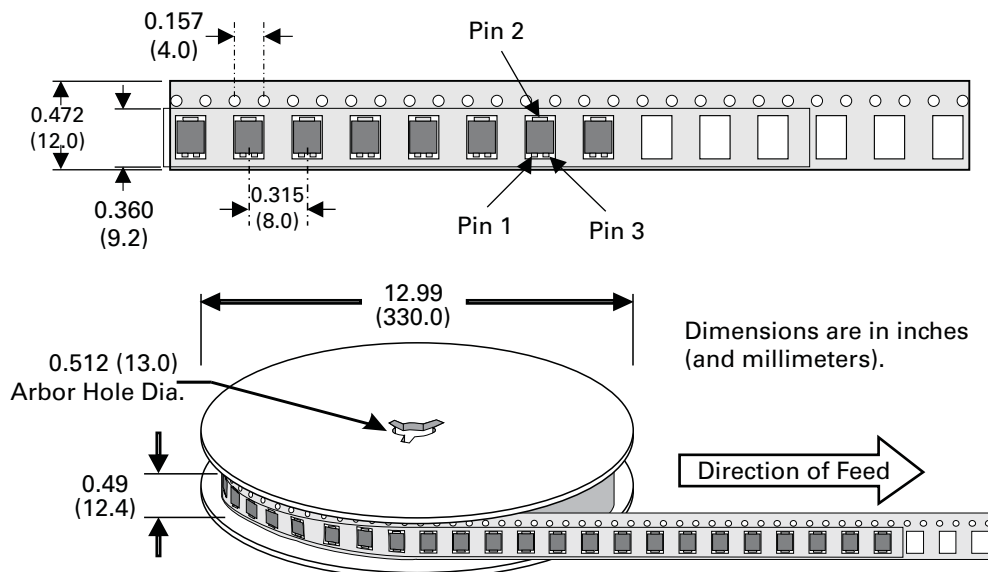



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331