

G3VM-62J1

MOS FET Relays

MOS FET Relays Designed for Switching Minute Signals and Analog Signals. Two Channels and an 8-pin SOP Package in 60-V Load Voltage Series.


- Continuous load current of 400 mA.
- Dielectric strength of 1,500 Vrms between I/O.

RoHS compliant

Application Examples

- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Data loggers

Terminal Arrangement/Internal Connections

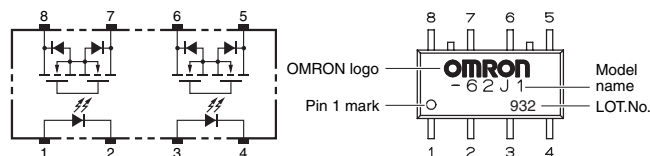

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
SOP8	2a (DPST-NO)	Surface-mounting Terminals	60 V	G3VM-62J1	50	-
				G3VM-62J1 (TR)	-	2,500

* The AC peak and DC value are given for the load voltage.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	IF	50	mA
	Repetitive peak LED forward current	IFP	1	A
	LED forward current reduction rate	$\Delta I_F / ^\circ\text{C}$	-0.5	mA/°C
	LED reverse voltage	VR	5	V
	Connection temperature	TJ	125	°C
Output	Load voltage (AC peak/DC)	VOFF	60	V
	Continuous load current (AC peak/DC)	IO	400	mA
	ON current reduction rate	$\Delta I_O / ^\circ\text{C}$	-4.0	mA/°C
Dielectric strength between I/O (See note 1.)		VI-O	1500	Vrms
Ambient operating temperature		Ta	-40 to +85	°C
Ambient storage temperature		Tstg	-55 to +125	°C
Soldering temperature		-	260	°C

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	VF	1.0	1.15	1.3	V
	Reverse current	IR	-	10	μA	IF = 10 mA
	Capacity between terminals	CT	30	-	pF	VR = 5 V
	Trigger LED forward current	IFT	1.6	3	mA	V = 0, f = 1 MHz
Output	Maximum resistance with output ON	RON	1.0	2.0	Ω	IF = 5 mA, IO = 400 mA
	Current leakage when the relay is open	ILEAK	-	1.0	μA	VOFF = 60 V
	Capacity between terminals	Coff	130	-	pF	V = 0, f = 1 MHz
	Capacity between I/O terminals	CI-O	0.8	-	pF	f = 1 MHz, Vs = 0 V
Insulation resistance between I/O terminals		RI-O	1000	-	MΩ	VI-O = 500 VDC, RoH ≤ 60 %
Turn-ON time		ton	0.8	2.0	ms	IF = 5 mA, RL = 200 Ω
Turn-OFF time		toff	0.1	0.5	ms	VDD = 20 V (See note 2.)

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	-	-	48	V
Operating LED forward current	I_F	5	7.5	25	mA
Continuous load current (AC peak/DC)	I_O	-	-	400	mA
Ambient operating temperature	T_a	-20	-	65	°C

Engineering Data


LED forward current vs. Ambient temperature

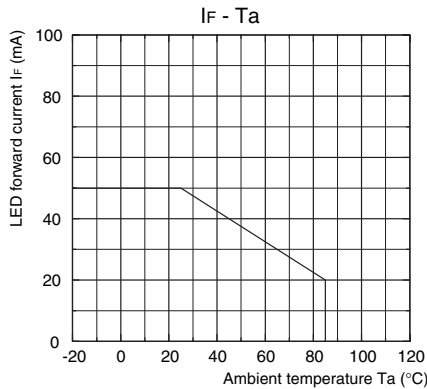


Continuous load current vs. Ambient temperature

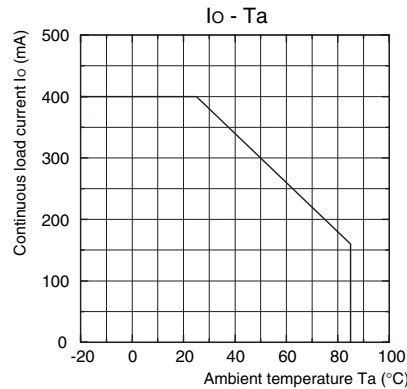


LED forward current vs. LED forward voltage

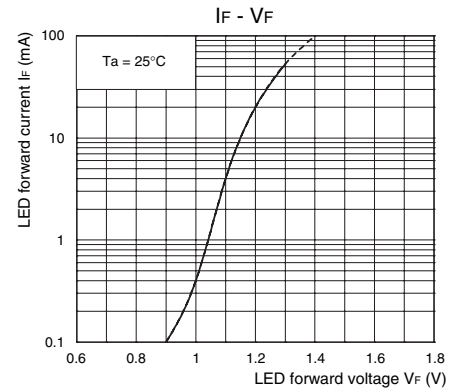


Continuous load current vs. On-state voltage

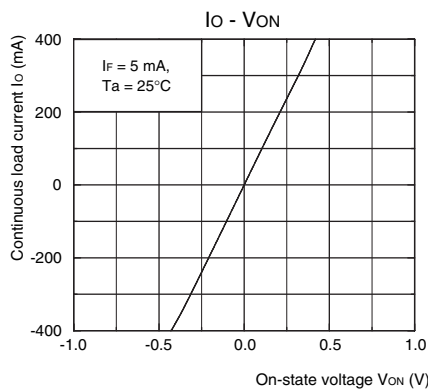


On-state resistance vs. Ambient temperature

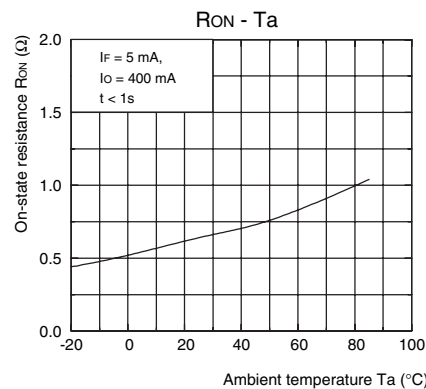


Trigger LED forward current vs. Ambient temperature

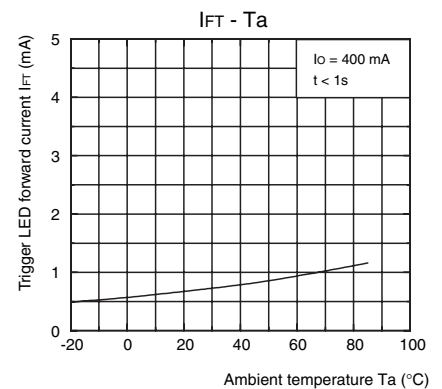


Turn ON, Turn OFF time vs. LED forward current

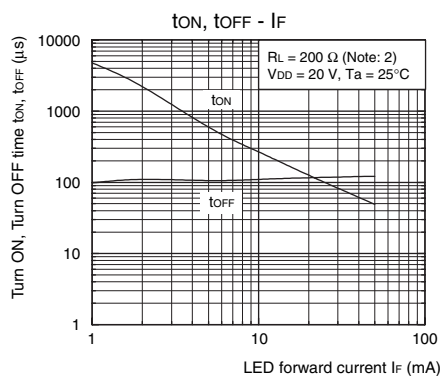

Turn ON, Turn OFF time vs. Ambient temperature

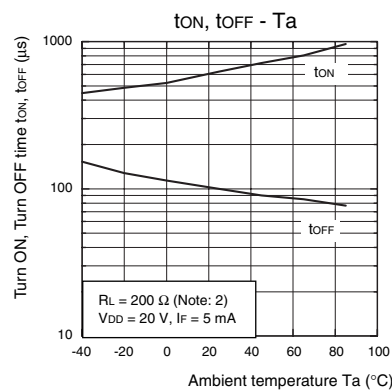

Current leakage vs. Ambient temperature

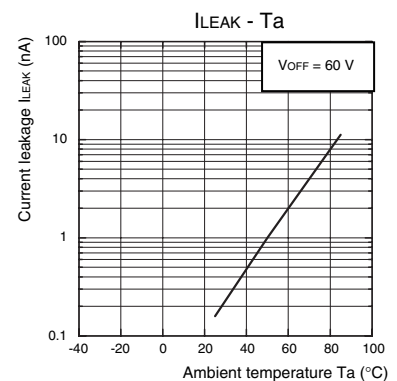


Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance


SOP (Small Outline Package) SOP8

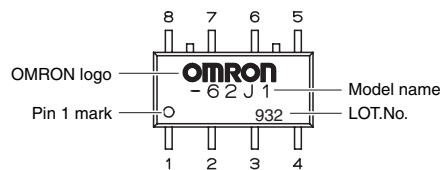

Note: The actual product is marked differently from the image shown here.


■ SOP8

(Unit: mm)




Surface-mounting Terminals

Weight: 0.2 g

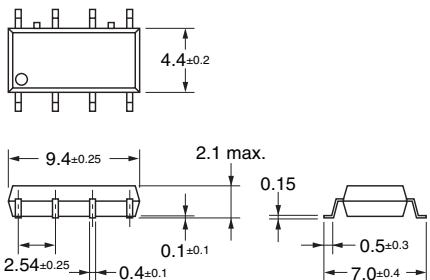

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. **K157-E1-01**
0412(0412)(O)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331