

# MAXIM

## MAX2754 Evaluation Kit

**Evaluates: MAX2754**

### General Description

The MAX2754 evaluation kit (EV kit) simplifies evaluation of the MAX2754 VCO. This kit enables testing of the device's RF performance and requires no additional support circuitry. The signal output uses an SMA connector to facilitate the connection to RF test equipment.

### Component List

DESIGNATION	QTY	DESCRIPTION
C1	1	0.33 $\mu$ F $\pm$ 10% ceramic capacitor (0603) Murata GRM36 334K016
C2, C4	2	1000pF $\pm$ 10% ceramic capacitors (0402) Murata GRM36X7R102K050
C3, C5	0	Not installed
C6	1	330pF $\pm$ 10% ceramic capacitor (0402) Murata GRM36X7R331K050
C7	1	0.1 $\mu$ F $\pm$ 10% ceramic capacitor (0603) Murata GRM39X7R104K016
R1, R2	2	1k $\Omega$ $\pm$ 5% resistors (0402)
R4	1	0 $\Omega$ $\pm$ 5% resistor (0402)
MOD, OUT	2	SMA connectors (edge-mount) EJJohnson 142-0701-801 Digi-Key J502-ND
GND, SHDN, TUNE, VCC	4	Test points, 1-pin header Mouser 151-203 or equivalent
JU1	1	Jumper, SIP3, 3-pin header Digi-Key S9000-ND or equivalent

### Component Suppliers

SUPPLIER	PHONE	FAX
Murata Electronics	800-831-9172	814-238-0490
Taiyo Yuden	408-573-4150	408-573-4159

**Note:** Please indicate that you are using the MAX2754 when contacting these component suppliers.

### Quick Start

The MAX2754 EV kit is fully assembled and factory tested. Follow the instructions in the *Connections and Setup* section for proper device evaluation.



**For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at [www.maxim-ic.com](http://www.maxim-ic.com).**

### Features

- ◆ Easy Evaluation of MAX2754
- ◆ +2.7V to +5.5V Single-Supply Operation
- ◆ RF Output Matched to 50 $\Omega$
- ◆ All Critical Peripheral Components Included

### Ordering Information

PART	TEMP. RANGE	IC PACKAGE
MAX2754EVKIT	-40°C to +85°C	8 $\mu$ MAX

### Test Equipment Required

This section lists the recommended test equipment to verify operation of the MAX2754. It is intended as a guide only, and some substitutions are possible.

- Three power supplies at +2.7V to +5.5V
- An ammeter (optional)
- An RF spectrum analyzer (HP 8561E, for example) that covers the operating frequency range of the MAX2754, as well as a few harmonics
- A 50 $\Omega$  SMA cable

### Connections and Setup

This section provides a step-by-step guide to the functions and operation of these EV kits.

- 1) Connect a DC supply set to +3V (through an ammeter, if desired) to the V<sub>CC</sub> and GND terminals on the EV kit.
- 2) Apply +3V to the  $\overline{\text{SHDN}}$  control input.
- 3) Turn on the DC supply. The supply current should read about 13.5mA.
- 4) Connect the VCO output to a spectrum analyzer with a 50 $\Omega$  coaxial cable (minimize length).
- 5) Apply a variable DC voltage to the TUNE input (+0.4V to +2.4V).
- 6) Check f<sub>MIN</sub> and f<sub>MAX</sub> on the spectrum analyzer by varying the tuning voltage.
- 7) Apply a variable DC voltage to the MOD input (+0.4V to +2.4V).
- 8) Check modulation peak frequency deviation on the spectrum analyzer by varying the modulation voltage.
- 9) Check the output power level (-5dBm typ).

# MAX2754 Evaluation Kit

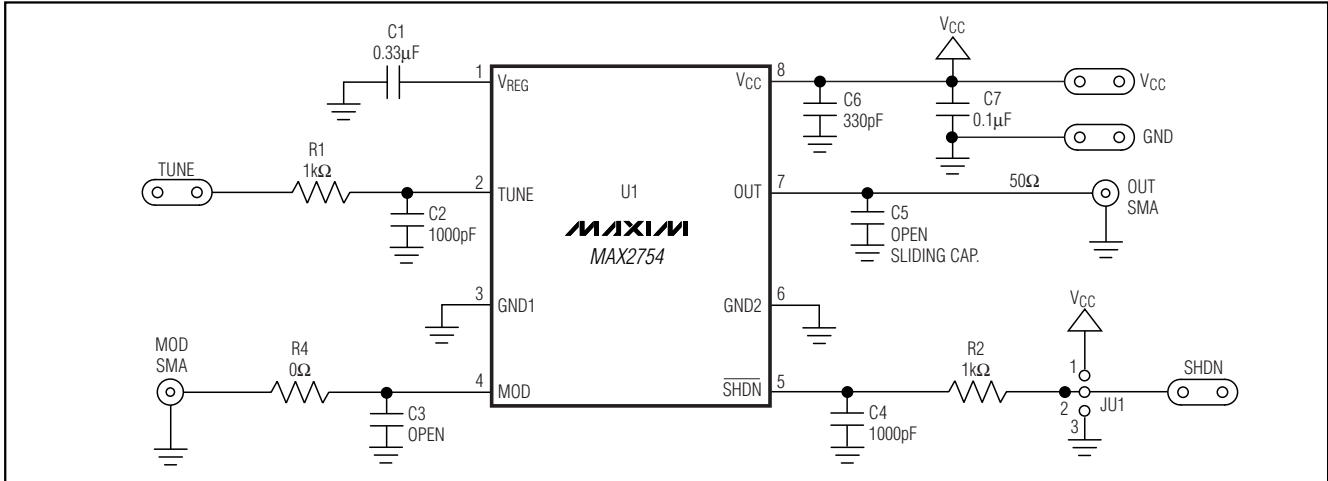


Figure 1. MAX2754 EV Kit Schematic

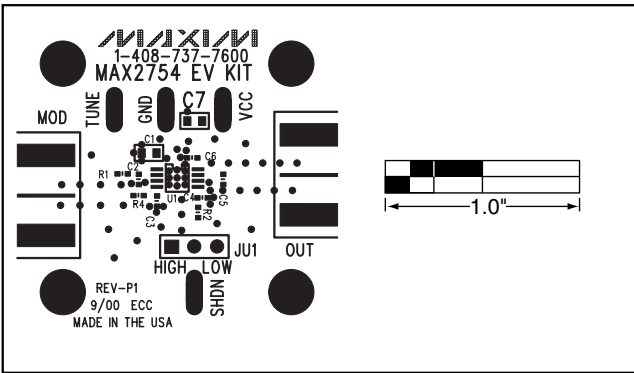


Figure 2. MAX2754 EV Kit Component Placement Guide—Top Silkscreen

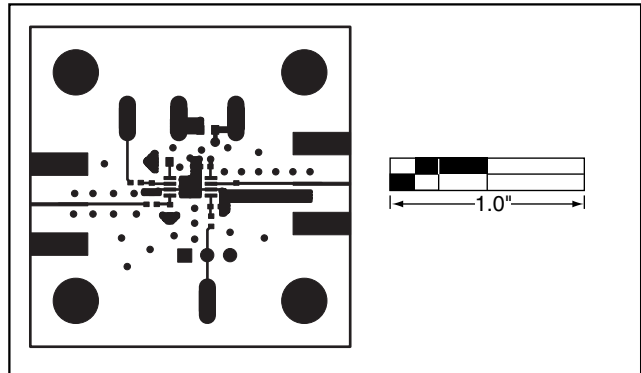


Figure 3. MAX2754 EV Kit PC Board Layout—Component Side

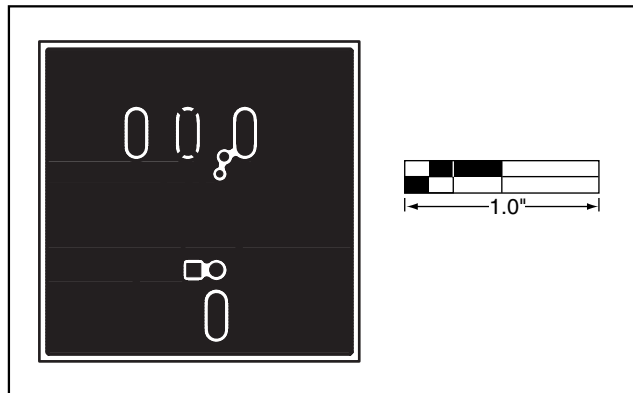


Figure 4. MAX2754 EV Kit PC Board Layout—Ground Plane 2

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

2 \_\_\_\_\_ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331