

## Type EP Series

### Key Features

- Power up to 10W in Small Size
- 16 Size / Power Options
- Specially Designed and Tested for Surge Immunity
- Flame Resistant Coating



TE Connectivity is pleased to offer this wire wound axial leaded resistor. Robustly manufactured with high quality materials this resistor offers flame proof coating, and is designed and tested to withstand power surges of up to 12KV.

### Characteristics – Electrical

|             | Type   | Rated Power at 70° C | Max. Working Voltage | Max. Overload Voltage | Dielectric Withstanding Voltage | Resistance Range | Operating Temp. Range |
|-------------|--------|----------------------|----------------------|-----------------------|---------------------------------|------------------|-----------------------|
| Normal size | EP05W  | 1/2W (0.50W)         | 500 V                | 1,000 V               | 350 V                           | 10Ω–560Ω         | -55°C – +155°C        |
|             | EP1W   | 1W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–1KΩ          |                       |
|             | EP2W   | 2W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–2KΩ          |                       |
|             | EP3W   | 3W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–3KΩ          |                       |
|             | EP5W   | 5W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–5KΩ          |                       |
|             | EP7W   | 7W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–6KΩ          |                       |
|             | EP8W   | 8W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–10KΩ         |                       |
|             | EP9W   | 9W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–15KΩ         |                       |
| Small size  | EP1WS  | 1W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–560Ω         | -55°C – +155°C        |
|             | EP2WS  | 2W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–1KΩ          |                       |
|             | EP3WS  | 3W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–2KΩ          |                       |
|             | EP5WS  | 5W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–3KΩ          |                       |
|             | EP7WS  | 7W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–5KΩ          |                       |
|             | EP8WS  | 8W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–6KΩ          |                       |
|             | EP9WS  | 9W                   | 500 V                | 1,000 V               | 500 V                           | 10Ω–10KΩ         |                       |
|             | EP10WS | 10W                  | 500 V                | 1,000 V               | 500 V                           | 10Ω–15KΩ         |                       |

### Power Derating Curve




For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with this curve.

## Type EP Series


### Surge Rating

| Type              | Low Resistance Range | Maximum Surge Voltage | Medium Resistance Range | Maximum Surge Voltage | High Resistance Range | Maximum Surge Voltage |
|-------------------|----------------------|-----------------------|-------------------------|-----------------------|-----------------------|-----------------------|
| EP05W             | 10Ω – 40Ω            | 3KV                   | 43Ω – 240Ω              | 4kV                   | 270Ω – 560Ω           | 4kV                   |
| EP1W              | 10Ω – 50Ω            | 4KV                   | 51Ω – 240 Ω             | 5kV                   | 270Ω – 1kΩ            | 5kV                   |
| EP2W              | 10Ω – 100Ω           | 5KV                   | 110Ω – 240Ω             | 6kV                   | 270Ω – 2kΩ            | 6kV                   |
| EP3W              | 10Ω – 100Ω           | 7KV                   | 110Ω – 680Ω             | 8kV                   | 750Ω – 3kΩ            | 8kV                   |
| EP5W              | 10Ω – 160Ω           | 8KV                   | 180Ω – 680Ω             | 9kV                   | 750Ω – 5kΩ            | 9kV                   |
| EP7W              | 10Ω – 160Ω           | 9KV                   | 180Ω – 680Ω             | 10kV                  | 750Ω – 6kΩ            | 10kV                  |
| EP8W              | 10Ω – 160Ω           | 10KV                  | 180Ω – 680Ω             | 11kV                  | 750Ω – 10kΩ           | 11kV                  |
| EP9W              | 10Ω – 160Ω           | 10KV                  | 180Ω – 680Ω             | 11kV                  | 750Ω – 15kΩ           | 12kV                  |
| <b>Small Size</b> |                      |                       |                         |                       |                       |                       |
| EP1WS             | 10Ω – 40Ω            | 3KV                   | 43Ω – 240Ω              | 4kV                   | 270Ω – 560Ω           | 4kV                   |
| EP2WS             | 10Ω – 50Ω            | 4KV                   | 51Ω – 240 Ω             | 5kV                   | 270Ω – 1kΩ            | 5kV                   |
| EP3WS             | 10Ω – 100Ω           | 5KV                   | 110Ω – 240Ω             | 6kV                   | 270Ω – 2kΩ            | 6kV                   |
| EP5WS             | 10Ω – 100Ω           | 7KV                   | 110Ω – 680Ω             | 8kV                   | 750Ω – 3kΩ            | 8kV                   |
| EP7WS             | 10Ω – 160Ω           | 8KV                   | 180Ω – 680Ω             | 9kV                   | 750Ω – 5kΩ            | 9kV                   |
| EP8WS             | 10Ω – 160Ω           | 9KV                   | 180Ω – 680Ω             | 10kV                  | 750Ω – 6kΩ            | 10kV                  |
| EP9WS             | 10Ω – 160Ω           | 10KV                  | 180Ω – 680Ω             | 11kV                  | 750Ω – 10kΩ           | 11kV                  |
| EP10WS            | 10Ω – 160Ω           | 10KV                  | 180Ω – 680Ω             | 11kV                  | 750Ω – 15kΩ           | 12kV                  |

### Surge Waveform (1.2/50 μs)

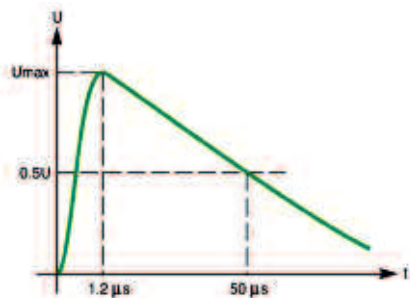


### 1.2/50 μs Voltage Capability

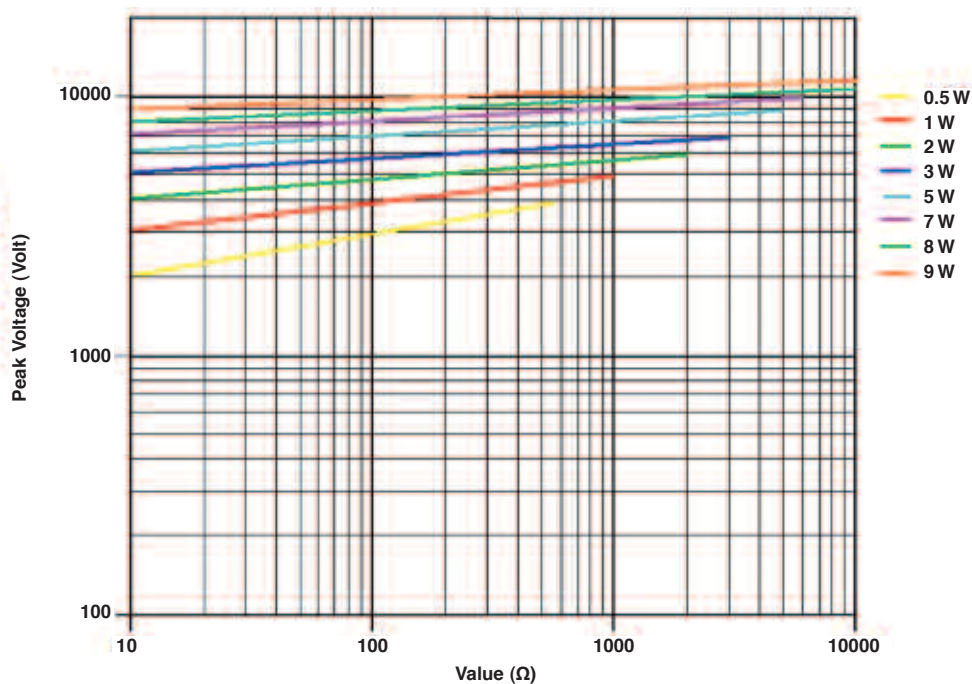


## Type EP Series

### Construction

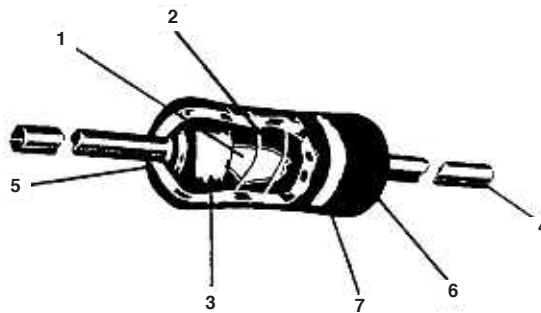

| No. | Name            | Material                                         |
|-----|-----------------|--------------------------------------------------|
| 1   | Basic Body      | Rod Type Ceramics                                |
| 2   | Resistance Wire | Ni-Cr Alloy, Cu-Ni Alloy                         |
| 3   | End Cap         | Steel (Tin plated iron surface)                  |
| 4   | Lead Wire       | Annealed copper wire coated with tin             |
| 5   | Joint           | By welding                                       |
| 6   | Coating         | Insulated & Non-Flame paint (Color: Light Green) |
| 7   | Color Code      | Non-Flame epoxy resin                            |

### Dimensions

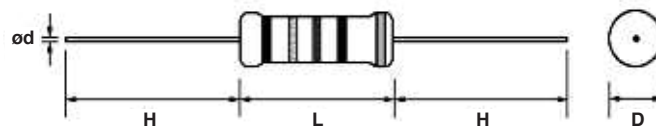

| Part No. | Power Rating<br>at 70 °C | Dimension (mm) |       |          |       |
|----------|--------------------------|----------------|-------|----------|-------|
|          |                          | D ± 1          | L ± 1 | d ± 0.05 | H ± 3 |
| EP05W    | 1/2W (0.50W)             | 3.5            | 10.0  | 0.54     | 28    |
| EP1W     | 1W                       | 5.0            | 12.0  | 0.70     | 25    |
| EP2W     | 2W                       | 5.5            | 16.0  | 0.70     | 28    |
| EP3W     | 3W                       | 6.5            | 17.5  | 0.75     | 28    |
| EP5W     | 5W                       | 8.5            | 25.0  | 0.75     | 38    |
| EP7W     | 7W                       | 8.5            | 30.0  | 0.75     | 38    |
| EP8W     | 8W                       | 8.5            | 40.0  | 0.75     | 38    |
| EP9W     | 9W                       | 8.5            | 53.0  | 0.75     | 38    |
| EP1WS    | 1W-S                     | 3.5            | 10.0  | 0.54     | 28    |
| EP2WS    | 2W-S                     | 5.0            | 12.0  | 0.70     | 25    |
| EP3WS    | 3W-S                     | 5.5            | 16.0  | 0.70     | 28    |
| EP5WS    | 5W-S                     | 6.5            | 17.5  | 0.75     | 28    |
| EP7WS    | 7W-S                     | 8.5            | 25.0  | 0.75     | 38    |
| EP8WS    | 8W-S                     | 8.5            | 30.0  | 0.75     | 38    |
| EP9WS    | 9W-S                     | 8.5            | 40.0  | 0.75     | 38    |
| EP10WS   | 10W-S                    | 8.5            | 53.0  | 0.75     | 38    |

## Type EP Series

### Characteristics – Environmental

| Item                                         | Limits                                                                                               | Test Method<br>(JIS C 5201-1)                                                                                     |
|----------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Temperature Coefficient of Resistance (TCR): | $<20\Omega : \pm 400\text{PPM}/^\circ\text{C}$<br>$\geq 20\Omega : \pm 300\text{PPM}/^\circ\text{C}$ | R2-R1<br>$R1 (t_2-t_1) \times 10^6 (\text{PPM}/^\circ\text{C})$                                                   |
| Short Time Overload:                         | $\pm (2\% + 0.05\Omega)$ Max                                                                         | RCWV*2.5 for 5 seconds                                                                                            |
| Load Life:                                   | $\pm (5.0\% + 0.05\Omega)$                                                                           | 70 $\pm$ 2 $^\circ\text{C}$ Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"                 |
| Load Life in Humidity:                       | $\pm (5.0\% + 0.05\Omega)$                                                                           | 40 $\pm$ 2 $^\circ\text{C}$ , 90-95% R.H. Max working voltage for 1000 hrs with 1.5hrs hrs "ON" and 0.5 hrs "OFF" |
| Solderability:                               | 95% min. coverage                                                                                    | 245 $\pm$ 5 $^\circ\text{C}$ for 3 seconds                                                                        |
| Resistance to Soldering Heat:                | $\pm (1.0\% + 0.05\Omega)$                                                                           | Leads immersed 3.2 – 4.8 mm from body - 350 $\pm$ 10 $^\circ\text{C}$ for 3 $\pm$ 0.05 seconds                    |
| Resistance to Solvent:                       | No deterioration of protective coating and markings                                                  | Immersed in trichroethane bath for 3 minutes with ultrasonic                                                      |
| Surge Immunity Test:                         | $\pm (5\% + 0.05\Omega)$ Max.                                                                        | Refer to IEC61000-4-5                                                                                             |
|                                              |                                                                                                      | Max Surge Voltage                                                                                                 |
|                                              |                                                                                                      | 1/2W 1WS 4KV                                                                                                      |
|                                              |                                                                                                      | 1W 2WS 5KV                                                                                                        |
|                                              |                                                                                                      | 2W 3WS 6KV                                                                                                        |
|                                              |                                                                                                      | 3W 5WS 8KV                                                                                                        |
|                                              |                                                                                                      | 5W 7WS 9KV                                                                                                        |
|                                              |                                                                                                      | 7W 8WS 10KV                                                                                                       |
|                                              |                                                                                                      | 8W 9WS 11KV                                                                                                       |
|                                              |                                                                                                      | 9W 10WS 12KV                                                                                                      |



Storage Temperature: 25 $\pm$ 3 $^\circ\text{C}$ ; Humidity 60% RH  $\pm$ 10%

### Marking

For EP Normal Size 1/2W, 1W, 2W, 3W and EP Small Size 1WS, 2WS, 3WS, 5WS Resistors shall be marked with color coding in accordance with JIS C 0802.



For EP Normal Size 5W, 7W, 8W 9W and EP Small Size 7WS, 8WS, 9WS, 10WS Resistors will be marked with power rating, nominal resistance and resistance tolerance code.



## Type EP Series

### Packaging

EP Normal Size: 1/2W, 1W, 2W, 3W and EP Small Size 1WS, 2WS, 3WS, 5WS supplied taped in "ammo boxes".  
All larger sizes supplied bulk packed in boxes

### How to Order

| EP          | 3W                                                                            | 200R                                 | J                                         |
|-------------|-------------------------------------------------------------------------------|--------------------------------------|-------------------------------------------|
| Common Part | Power rating                                                                  | Nominal Resistance                   | Resistance Tolerance                      |
| EP          | 05W = 1/2W<br>1W = 1W<br>1WS = 1WS<br>As per Electrical characteristics chart | 10Ω – 10R<br><br>1KΩ -1K0<br>(1000Ω) | F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10% |

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.

Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331