



**CONNECTOR
 DESIGNATORS**




A-B*-C-D-E-F
G-H-J-K-L-S

* Conn. Design. B See Note 5
DIRECT COUPLING


**TYPE F INDIVIDUAL
 AND/OR OVERALL
 SHIELD TERMINATION**

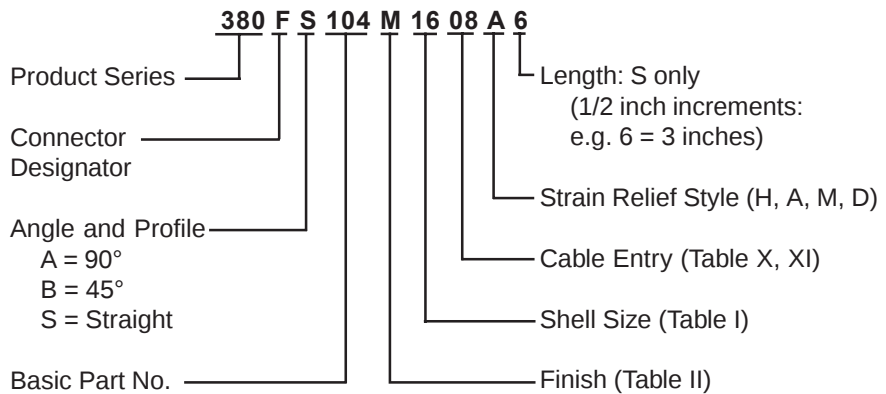


**STYLE 2
 (STRAIGHT
 See Note 1)**

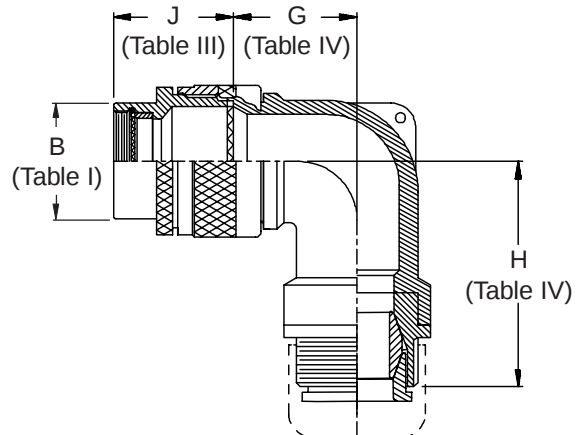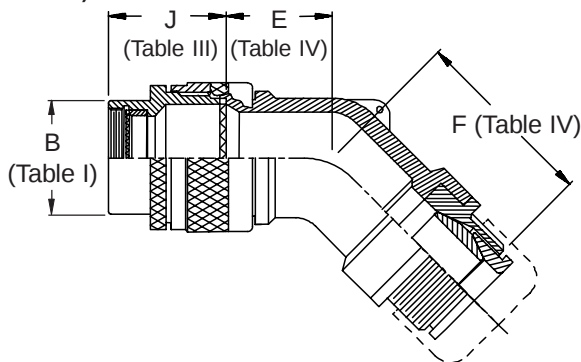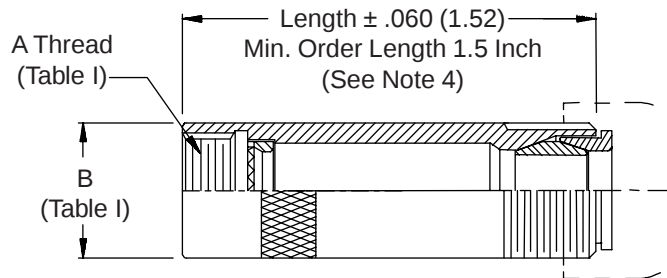


**STYLE H
 Heavy Duty
 (Table X)**




**STYLE A
 Medium Duty
 (Table XI)**



**STYLE M
 Medium Duty
 (Table XI)**



**STYLE D
 Medium Duty
 (Table XI)**



380-104
EMI/RFI Non-Environmental Backshell
with Strain Relief
Type F - Direct Coupling - Low Profile



TABLE III: FRONT ADAPTER			
Shell Size	J Max - Conn. Designator		
	A-E-F		
	J-H-L-S	D-B-G-K	C
08/09	1.180 (30.0)	1.440 (36.6)	
10/11	1.180 (30.0)	1.440 (36.6)	
12/13	1.180 (30.0)	1.440 (36.6)	1.735 (44.1)
14/15	1.180 (30.0)	1.440 (36.6)	1.915 (48.6)
16/17	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
18/19	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
20/21	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
22/23	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
24/25	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
28/29	1.610 (40.9)	1.560 (39.6)	1.915 (48.6)
32/33	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
36	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
40	1.610 (40.9)	2.190 (55.6)	1.915 (48.6)

TABLE IV: ELBOW DIMENSIONS									
Elbow Size	E Max		F Max		G Max		H Max		
03	.457	(11.6)	1.602	(40.7)	.500	(12.7)	1.612	(40.9)	
04	.457	(11.6)	1.662	(42.2)	.500	(12.7)	1.732	(44.0)	
06	.520	(13.2)	1.722	(43.7)	.595	(15.1)	1.752	(44.5)	
08	.582	(14.8)	2.062	(52.4)	.610	(15.5)	2.072	(52.6)	
10	.645	(16.4)	2.172	(55.2)	.700	(17.8)	2.162	(54.9)	
12	.738	(18.7)	2.362	(60.0)	.885	(22.5)	2.332	(59.2)	
16	.926	(23.5)	2.362	(60.0)	.975	(24.8)	2.332	(59.2)	
20	1.020	(25.9)	2.512	(63.8)	1.125	(28.6)	2.442	(62.0)	
24	1.145	(29.1)	2.512	(63.8)	1.225	(31.1)	2.442	(62.0)	
28	1.207	(30.7)	2.562	(65.1)	1.575	(40.0)	2.612	(66.3)	
32	1.238	(31.4)	2.662	(67.6)	1.775	(45.1)	2.862	(72.7)	

See inside back cover fold-out or pages 13 and 14
for unabridged Tables I and II.

TABLE II: STANDARD FINISHES

GLENAIR SYMBOL	FINISH
B	Cadmium Plate, Olive Drab
M	Electroless Nickel
NF	Cadmium Plate, Olive Drab Over Electroless Nickel
See Inside Back Cover for Additional Finish Options	

TABLE X: CABLE ENTRY						
Dash No.	T Max		V Max		Cable Range	
					Min	Max
04	.780	(19.8)	.957	(24.3)	.125 (3.2)	.312 (7.9)
06	.780	(19.8)	1.145	(29.1)	.250 (6.4)	.437 (11.1)
08	.780	(19.8)	1.332	(33.8)	.312 (7.9)	.562 (14.3)
10	.780	(19.8)	1.332	(33.8)	.350 (8.9)	.625 (15.9)
12	.811	(20.6)	1.551	(39.4)	.500 (12.7)	.750 (19.1)
16	.905	(23.0)	1.770	(45.0)	.625 (15.9)	.937 (23.8)
20	1.092	(27.7)	2.113	(53.7)	.875 (22.2)	1.250 (31.8)
24	1.124	(28.5)	2.363	(60.0)	1.000 (25.4)	1.375 (34.9)
28	1.399	(35.5)	2.770	(70.4)	1.250 (31.8)	1.625 (41.3)
32	1.399	(35.5)	3.020	(76.7)	1.437 (36.5)	1.875 (47.6)

1. When maximum cable entry (page 22) is exceeded, Style 2 will be supplied. Dimensions E, F, G and H will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
4. Consult factory for shorter lengths on straight backshells.
5. When using Connector Designator B refer to pages 18 and 19 for part number development.

TABLE XI: CABLE ENTRY									
Dash No.	W Max		X Max		Y Max		Z Max		Cable Range
									Min ** Max
03*	.437	(11.1)	.760	(19.3)	.843	(21.4)	.630	(16.0)	.156 (4.0) .250 (6.4)
04*	.437	(11.1)	.760	(19.3)	.906	(23.0)	.755	(19.2)	.188 (4.8) .312 (7.9)
06*	.500	(12.7)	.760	(19.3)	1.093	(27.8)	.942	(23.9)	.281 (7.1) .438 (11.1)
08	.563	(14.3)	.760	(19.3)	1.187	(30.1)	1.067	(27.1)	.344 (8.7) .562 (14.3)
10	.563	(14.3)	.760	(19.3)	1.281	(32.5)	1.192	(30.3)	.375 (9.5) .625 (15.9)
12	.563	(14.3)	.760	(19.3)	1.500	(38.1)	1.380	(35.1)	.438 (11.1) .750 (19.1)
16	.656	(16.7)	1.073	(27.3)	1.719	(43.7)	1.535	(39.0)	.562 (14.3) .938 (23.8)
20	.656	(16.7)	1.323	(33.6)	2.062	(52.4)	1.848	(46.9)	.750 (19.1) 1.250 (31.8)
24	.656	(16.7)	1.323	(33.6)	2.312	(58.7)	2.255	(57.3)	.781 (19.8) 1.375 (34.9)
28	1.188	(30.2)	1.572	(39.9)	2.719	(69.1)	2.505	(63.6)	.969 (24.6) 1.625 (41.3)
32*	1.187	(30.1)	1.572	(39.9)	2.969	(75.4)	2.755	(70.0)	1.125 (28.6) 1.875 (47.6)
* Not available in Style M clamp.					** Not Applicable Style D				



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331