

# MISCELLANEOUS HARDWARE & ACCESSORIES

|                                 |           |
|---------------------------------|-----------|
| SWITCH HARDWARE.....            | D2 - D4   |
| PUSHBUTTON AND TOGGLE CAPS..... | D5 - D6   |
| SECURITY GUARDS.....            | D7 - D9   |
| SEALING BOOTS.....              | D10 - D14 |
| VL SERIES LED INDICATORS.....   | D15 - D16 |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

D



## MISCELLANEOUS HARDWARE

**HEX NUT A112** Nickel plated brass  
1/4-40



**HEX NUT** Brass 1/4-40  
Nickel plated **U76** Matte black **U94**




**HEX NUT** Brass  
Nickel plated **U208** Matte black **U726**



**HEX NUT** Brass  
Chrome plated **U1916**




**HEX NUT U842** 10mm (.393")  
Nickel plated brass




**HEX NUT A465**  
Nickel plated brass 15/32-32



**HEX NUT** Brass 15/32-32  
Nickel plated **U162** Matte black **U41**  
Chrome plated **U92**



**HEX NUT** Brass 12mm (.472")  
Nickel plated **U166** Matte black **U183**  
Chrome plated **U212**




**HEX CAP NUT** Brass 12mm (.472")  
Chrome plated **U35**




**PAL NUT U42** 12mm (.472")  
Zinc plated steel



**HEX NUT 10-621** 16mm (.629")  
Nickel plated brass




**HEX NUT U1950-5** 19mm (.748")  
Nickel plated brass



**HEX NUT 10-855-5** 19mm (.748")  
Nickel plated brass




**HEX NUT U1951-5** 22mm (.866")  
Nickel plated brass




**HEX NUT 10-856-5** 22mm (.866")  
Nickel plated brass




**HEX NUT U2059-5** 24mm (.944")  
Nickel plated brass




**PANEL DRESS NUT A168P1**  
Blind thread, Nickel plated brass  
1/4-40




**PANEL DRESS NUT A168P2**  
Thru thread, Nickel plated brass  
1/4-40



**PANEL DRESS NUT A274**  
Nickel plated brass 1/4-40













**PANEL DRESS NUT A540**  
Nickel plated brass 15/32-32




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

## MISCELLANEOUS HARDWARE (CONT'D.)


|                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                         |                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>DECORATIVE NUT A447</b><br/>Thru thread, chromium plated brass<br/>1/4-40</p>                           | <p><b>KNURLED NUT U369</b> 1/4-40<br/>Nickel plated brass</p>                                                                                                                                                                                         | <p><b>KNURLED NUT U501</b> 1/4-40<br/>Chrome plated brass</p>                                                                         | <p><b>KNURLED NUT</b> Brass 1/4-40<br/>Nickel plated <b>U229</b> Matte black <b>U230</b></p>                  |
| <p><b>KNURLED NUT U826</b><br/>Nickel plated brass</p>                                                        | <p><b>KNURLED CAP NUT</b> Brass 1/4-40<br/>Chrome plated <b>U216</b> Matte black <b>U218</b></p>                                                                                                                                                      | <p><b>KNURLED CAP NUT</b> Brass<br/>Chrome pl. <b>U461</b> Matte black <b>U502</b></p>                                                | <p><b>KNURLED CAP NUT</b> Brass<br/>Chrome plated <b>U232</b></p>                                             |
| <p><b>KNURLED CAP NUT</b> Brass 1/4-40<br/>Chrome pl. <b>U268</b> Matte black <b>U725</b></p>                | <p><b>KNURLED NUT U2311</b> 10mm (.393")<br/>Chrome plated brass</p>                                                                                                                                                                                 | <p><b>KNURLED CAP NUT U2220</b><br/>10mm (.393") Chrome plated brass</p>                                                             | <p><b>KNURLED NUT</b> Brass 15/32-32<br/>Nickel plated <b>U53</b> Matte black <b>U1634</b></p>               |
| <p><b>KNURLED CAP NUT U123</b> 15/32-32<br/>Chrome plated brass</p>                                         | <p><b>KNURLED CAP NUT U124</b> 15/32-32<br/>Chrome plated brass</p>                                                                                                                                                                                 | <p><b>PANEL DRESS NUT</b> Brass 12mm (.472")<br/>Nickel plated <b>U411</b>, Matte black <b>U413</b>, Chrome plated <b>U412</b></p>  | <p><b>KNURLED CAP NUT</b> Brass<br/>12mm (.472") Chrome plated <b>U117</b><br/>Matte black <b>U129</b></p>  |
| <p><b>KNURLED CAP NUT</b> Brass<br/>12mm (.472") Chrome plated <b>U118</b><br/>Matte black <b>U130</b></p>  | <p><b>INSULATED PANEL DRESS NUT</b><br/>12mm (.472") ABS or polyamide with glass fiber. blue <b>U521</b>, black <b>U522</b>, green <b>U523</b>, gray <b>U524</b>, yellow <b>U525</b>, red <b>U526</b>, white <b>U527/1</b>, orange <b>U529</b></p>  | <p><b>KNURLED NUT 10-960-5</b><br/>16mm (.629") Nickel plated brass</p>                                                             | <p><b>KNURLED NUT U1977-5</b><br/>19mm (.748") Nickel plated brass</p>                                      |

## MISCELLANEOUS HARDWARE (CONT'D.)


**LOCKWASHER U14** .122 I.D.




**LOCKWASHER 1/4**  
Stainless steel **U215**




**LOCKWASHER A115**  
Nickel plated steel 1/4




**LOCKWASHER U843** 10mm (.393")  
Stainless steel




**LOCKWASHER A466**  
Nickel plated steel 15/32




**LOCKWASHER U13** 15/32  
Zinc plated




**ANTI-ROTATE RING A107**  
Nickel plated brass 1/4




**LOCKING RING 1/4**  
Nickel plated **U78** Matte black **U93**




**LOCKING RING** Brass  
Nickel plated **U198** Matte black **U728**




**ANTI-ROTATE RING (LARGE) A158**  
Nickel plated brass 1/4



**LOCKING RING U844** 10mm (.393")  
Nickel plated




**ANTI-ROTATE RING A482**  
Nickel plated brass 15/32




**LOCKING RING** 12mm (.472")  
Nickel plated **U121** Matte black **U12**




**SEALING WASHER U360** 1/4-40  
For keyway bushing




**SEALING WASHER U60** 15/32




**SEALING WASHER** Nylon  
12mm (.472") **U21**




**GROUND CONNECTOR**  
12mm (.472") Nickel plated **U187**




**SWITCH PLATE I-O U1050**  
.480 I.D.



**SWITCH PLATE ON-OFF U19**  
.480 I.D.



**CONNECTING SCREW U03**




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# MISCELLANEOUS PUSHBUTTON ACCESSORIES & CAPS

Note: additional caps are shown in some switch sections.

## PANEL DRESS NUTS & CAPS FOR PUSHBUTTON SWITCHES

| ASSEMBLY NUMBER | FITS SWITCH MODEL | OPTION(S) REQUIRED | INCLUDES  |        |
|-----------------|-------------------|--------------------|-----------|--------|
|                 |                   |                    | DRESS NUT | CAP    |
| A1354P1         | 810/820           | KM                 | A495P1    | B494P1 |
| A1354P2         | 401/402           | S                  | A495P1    | B494P2 |
| A1354P3         | PB                | PY                 | A495P1    | B494P3 |
| A1355P1         | 810/820           | KM                 | A495P2    | B494P1 |
| A1355P2         | 302               | NONE               | A495P2    | B494P2 |
| A1355P2         | 401/402           | NONE               | A495P2    | B494P2 |
| A1355P3         | PB                | PY or P2Y1         | A495P2    | B494P3 |

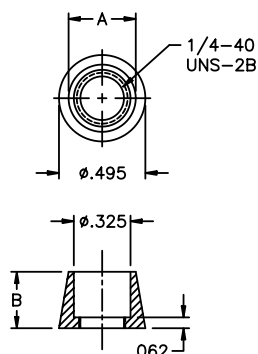

'A' dimension is determined by panel thickness indicated in table and allows for (1) back-up Nut A112 and (1) Lockwasher A115. Order these separately to provide for secure, vibration resistant mounting.


| PART NO. | A DIA. | B DIA. |
|----------|--------|--------|
| A495P1   | .385   | .323   |
| A495P2   | .413   | .245   |



Order Assembly Number from chart to left. Add cap color no. from color code chart below. Example: A1354P36 indicates assembly to fit a PB switch and is supplied with a red cap.

| SWITCH MODEL | OPTION (IF REQ'D) | A1354 |      | A1355 |      |
|--------------|-------------------|-------|------|-------|------|
|              |                   | A     | P.T. | A     | P.T. |
| 810/820      | KM                | .040  | .062 | .090  | .093 |
| PB           | PY                | .100  | .125 | .135  | .171 |
| PB           | P2Y1              | -     | -    | .120  | .093 |
| 302          | -                 | -     | -    | .070  | .078 |
| 401/402      | -                 | -     | -    | .130  | .078 |
| 401/402      | S                 | .130  | .062 | -     | -    |

### COLOR CAP Vinyl plastisol



| PART NO. | DIM. A | FITS ACTUATOR |
|----------|--------|---------------|
| A118     | 5/16   | K             |
| A391     | 3/16   | L2            |
| A392     | 3/4    | L             |

### PUSHBUTTON CAPS (ALL)

Material - Nylon


Caps press fit adequately, however they may be pulled off. If permanent retention is required, cement with Loctite 405 or equivalent, insuring no cement enters switch.

### PUSHBUTTON CAP A212



FITS PB SERIES


### COLOR CAPS B366 & B497



B366 fits 300 & 400 Series with S option only, and all PB Series.

B497 fits 800 Series with options KM, KS, KM1, K1M1 & K2M1.


### PUSHBUTTON CAPS A180 & A496



A180 fits all PB Series.

A496 fits 800 Series with options KM, KS, KM1, K1M1, K2M, K2S & K2M1.


### PUSHBUTTON CAP A235



\* - fits all PB, 300 & 400 Series.

\*\* - fits 800 Series with options KM, KS, KM1 & K2M1.

### PUSHBUTTON CAP A420



\* - Fits all 300 Series except 301 & 305. Fits 301 & 305 with S option. Fits all 400 & PB Series.

\*\* - Fits 800 Series with options KM, KS, KM1 & K2M1.

### STANDARD COLOR CODE

For nylon caps, actuators, bezels & bezel inserts. To specify, add selected color code to part number. Example: A2122 is a black A212 Cap. To specify for actuators, bezels and bezel inserts, see 'Order Format' section following specific series information in this catalog.


| Code | Color  | Code | Color |
|------|--------|------|-------|
| 1    | blue   | 2    | black |
| 3    | green  | 4    | gray  |
| 5    | yellow | 6    | red   |
| 7    | ivory  | 8    | white |
| 9    | orange |      |       |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

D

## MISCELLANEOUS PUSHBUTTON ACCESSORIES & CAPS (CONT'D.)

### COLOR CAP B494




\*\* - P1 fits all 800 Series except K1M & K1S.

\* - P2 fits all 300 & 400 Series.

\* - P3 fits all PB Series.


### PUSHBUTTON CAP A631



\* - Fits all 300 Series except 301 & 305. Fits 301 & 305 with S option. Fits all 400 & PB Series.

\*\* - Fits 800 Series with options KM, KS, KM1 & K2M1.

### PUSHBUTTON CAP A632



Fits all PB Series.


### CUSTOM MARKING

Permanent ink marking is available for switch caps, bezels and rocker actuators. Consult factory with your special requirement. Representative samples available.

## SWITCH GUARDS

Materials: 5056-H18 aluminum with clear or black anodize, or free machining brass with bright chrome plate.  
Dimensions in inches and (millimeters). Tolerances: A & D,  $\pm 0.15"$  B & C,  $\pm 0.005"$

| MODEL  | TH'D.  | COLOR       | FINISH  | A           | B           | C          | D          |
|--------|--------|-------------|---------|-------------|-------------|------------|------------|
| MG11A  | 10-48  | NATURAL AL. | PLAIN   |             |             |            |            |
| MG11B  | 10-48  | BLACK AL.   | PLAIN   |             |             |            |            |
| MG12A  | 1/4-40 | NATURAL AL. | PLAIN   |             |             |            |            |
| MG12B  | 1/4-40 | BLACK AL.   | PLAIN   | .530 (13.5) | .413 (10.5) | .315 (8.0) | .236 (6.0) |
| MG12C  | 1/4-40 | CHROMED BR. | PLAIN   |             |             |            |            |
| MG12KA | 1/4-40 | NATURAL AL. | KNURLED |             |             |            |            |
| MG12KB | 1/4-40 | BLACK AL.   | KNURLED |             |             |            |            |
| MG12KC | 1/4-40 | CHROMED BR. | KNURLED |             |             |            |            |
| MG13A  | 1/4-40 | NATURAL AL. | PLAIN   | .730 (18.5) | .610 (15.5) | .315 (8.0) | .236 (6.0) |
| MG13B  | 1/4-40 | BLACK AL.   | PLAIN   |             |             |            |            |
| MG13C  | 1/4-40 | CHROMED BR. | PLAIN   |             |             |            |            |

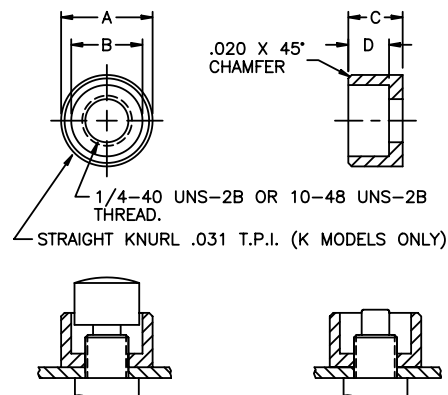

### STANDARD COLOR CODE

For nylon caps, actuators, bezels & bezel inserts.  
To specify, add selected color code to part number. Example: A2122 is a black A212 Cap. To specify for actuators, bezels and bezel inserts, see 'Order Format' section following specific series information in this catalog.

| Code | Color  | Code | Color |
|------|--------|------|-------|
| 1    | blue   | 2    | black |
| 3    | green  | 4    | gray  |
| 5    | yellow | 6    | red   |
| 7    | ivory  | 8    | white |
| 9    | orange |      |       |

### CAPS FOR PRINTED CIRCUIT BOARD PROCESSING

Available on models with plain bushing.  
Supplied mounted on switches or separately.  
Provides additional protection during pcb processing.

| Outline | Series | Material | Part No. |
|---------|--------|----------|----------|
|         | S      | Vinyl    | U3012    |
|         | TP     | Vinyl    | U3502    |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# SECURITY GUARDS for switch series 12000, 3500, 600H and 6000

## FEATURES

- Security guards prevent inadvertent switch operation.
- When guard cap is raised, switch actuator operates freely.
- When guard cap is depressed, switch actuator is locked in set position.
- Designed for use on switches with 11.9mm (.468") or 12mm (.472") dia. threaded bushings and actuator length 17.5mm (.688") outside bushing .
- Adjust guard for correct switch operation with 2 nuts.




## MATERIALS

Support plate: Matte black steel  
Cap: Thermoset plastic

### Series 20 - for 2 position switches

Actuator returned then locked in down position (OFF)


| MODEL NO. | COLOR                |
|-----------|----------------------|
| 22        | Gray                 |
| 23        | White                |
| 24        | Orange               |
| 25        | Black                |
| 26        | Red                  |
| 27        | Green                |
| 28        | Yellow               |
| 25/28     | Black/yellow striped |

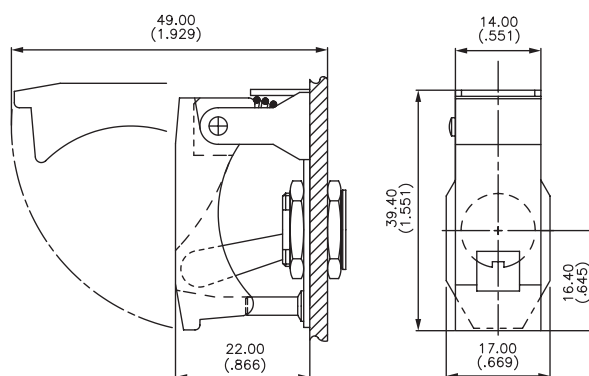

### Series 30 - for 3 position switches

Actuator returned then locked in upper position


| MODEL NO. | COLOR                |
|-----------|----------------------|
| 32        | Gray                 |
| 33        | White                |
| 34        | Orange               |
| 35        | Black                |
| 36        | Red                  |
| 37        | Green                |
| 38        | Yellow               |
| 39        | Yellow               |
| 35/38     | Black/yellow striped |

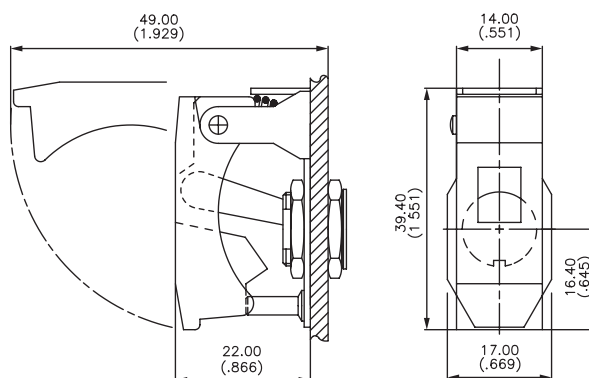

### Series 40 - for 2 position switches

Actuator returned then locked in upper position

| MODEL NO. | COLOR                |
|-----------|----------------------|
| 42        | Gray                 |
| 43        | White                |
| 44        | Orange               |
| 45        | Black                |
| 46        | Red                  |
| 47        | Green                |
| 48        | Yellow               |
| 49        | Blue                 |
| 45/48     | Black/yellow striped |

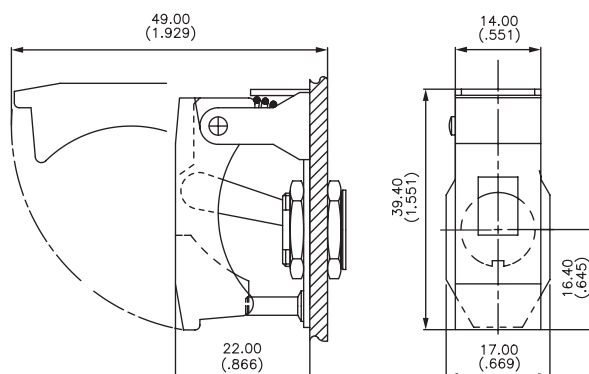


# SECURITY GUARDS for switch series 12000, 3500, 600H and 6000

## Series 50 - for 2 position switches

Actuator returned then locked in down position (OFF)


| MODEL NO. | COLOR                |
|-----------|----------------------|
| 52        | Gray                 |
| 53        | White                |
| 54        | Orange               |
| 55        | Black                |
| 56        | Red                  |
| 57        | Green                |
| 58        | Yellow               |
| 59        | Blue                 |
| 55/58     | Black/yellow striped |

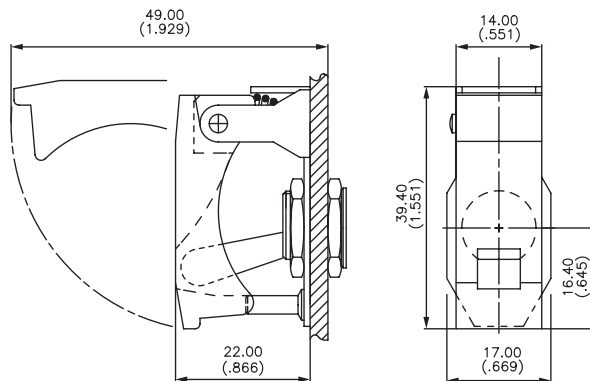

## Series 60 - for 3 position switches

Actuator returned then locked in upper position


| MODEL NO. | COLOR                |
|-----------|----------------------|
| 62        | Gray                 |
| 63        | White                |
| 64        | Orange               |
| 65        | Black                |
| 66        | Red                  |
| 67        | Green                |
| 68        | Yellow               |
| 69        | Blue                 |
| 65/68     | Black/yellow striped |

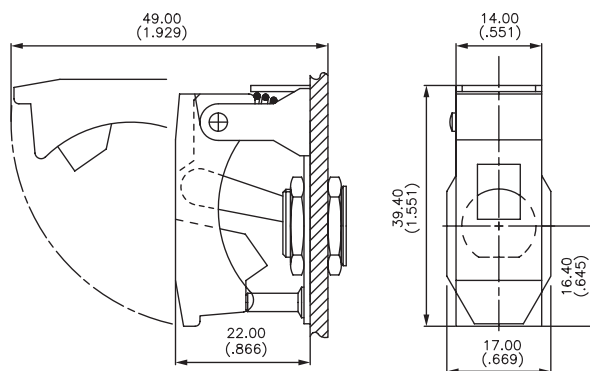

## Series 70 - for 2 position switches

Actuator returned then locked in upper position


| MODEL NO. | COLOR                |
|-----------|----------------------|
| 72        | Gray                 |
| 73        | White                |
| 74        | Orange               |
| 75        | Black                |
| 76        | Red                  |
| 77        | Green                |
| 78        | Yellow               |
| 79        | Yellow               |
| 75/78     | Black/yellow striped |

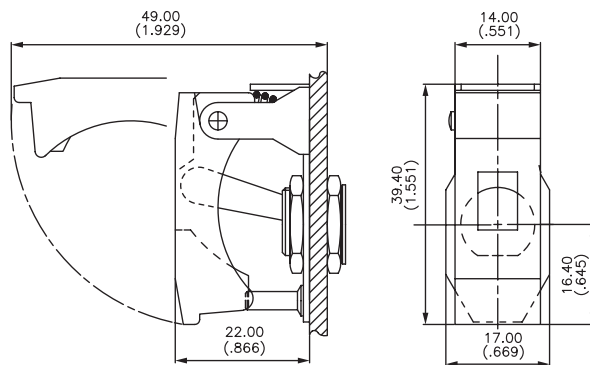

## Series 20PN - for 2 position switches

Actuator returned then locked in down position (OFF)  
Option P - holes for wiring seal standard on this model


| MODEL NO. | COLOR  |
|-----------|--------|
| 22PN      | Gray   |
| 23PN      | White  |
| 24PN      | Orange |
| 25PN      | Black  |
| 26PN      | Red    |
| 27PN      | Green  |
| 28PN      | Yellow |
| 29PN      | Blue   |

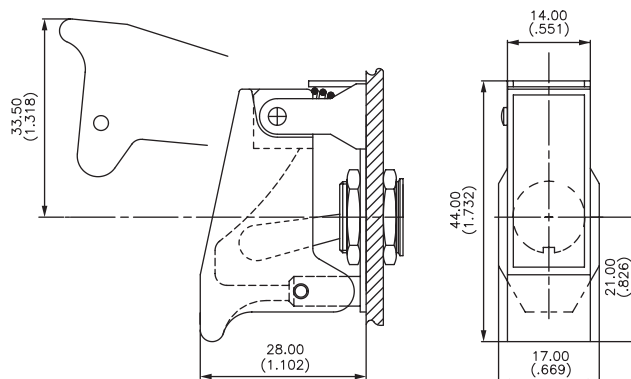


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# SECURITY GUARDS for switch series 12000, 3500, 600H and 6000


## PANEL CUT-OUTS & OPTIONS




With keying  
Series 20 - 30 - 40



With locking ring



With 'D' flat  
Series 50 - 60 - 70



**P** Holes for wiring seal



Cap engraving available - consult factory.

Other locking configurations such as locked center position available - consult factory.


## SECURITY GUARDS for switch series 3500, 600H and 6000

### Series 90


Actuator locked in center position




### Bushing shapes - for standard products




**A**



**B**




**C**




**D**


### - for other products




**E**



**F**




**G**




**H**


### Security guard cap shape




**1**  
Locks in center position




**2**  
Prevents down position



**3**  
Prevents up position



**4**  
Locks in down position



**5**  
Locks in up position

### Security guard cap colors


#### OPTION COLOR

|     |                                |
|-----|--------------------------------|
| 1   | Blue                           |
| 2   | Black                          |
| 3   | Green                          |
| 4   | Gray                           |
| 5   | Yellow                         |
| 6   | Red                            |
| 7/1 | White                          |
| 9   | Orange                         |
| 0   | Striped (see color of stripes) |

### Color of stripes

#### OPTION STRIPE 1 STRIPE 2

|   |        |       |
|---|--------|-------|
| A | Red    | Black |
| B | Yellow | Black |
| C | Red    | White |
| D | White  | Black |



### How to order

#### Series Bushing shape Cap shape Cap color Color of stripes

9 0 — — — —

Fill in boxes by making selections from each category indicated.

Example of completely specified model number:

**90A10B**

# SEALING BOOTS FOR SWITCHES

## FEATURES

- Prevents dust, sand and water from entering switches.
- Prevents ice from blocking actuator movement on toggle switches.
- Compatible with internally sealed toggle and pushbutton actuators.
- Available in a wide range of colors .
- Each boot is supplied with a sealing ring or washer.

## MATERIALS AND SPECIFICATIONS

**Boot material:** Neoprene or silicone (see comparative advantages below)


**Nut material:** Nickel plated or matte black finished brass

**Operating temperature:** Neoprene; -20°C to 50°C      -40°C to 85°C

| Comparative Advantages | Temperature Range |           | Elasticity | Mechanical Resistance |
|------------------------|-------------------|-----------|------------|-----------------------|
|                        | Low               | High      |            |                       |
| Silicone               | Excellent         | Excellent | Excellent  | Poor                  |
| Neoprene               | Poor              | Good      | Poor       | Excellent             |

## TYPES OF BOOTS - CROSS SECTIONS

\* Color options available

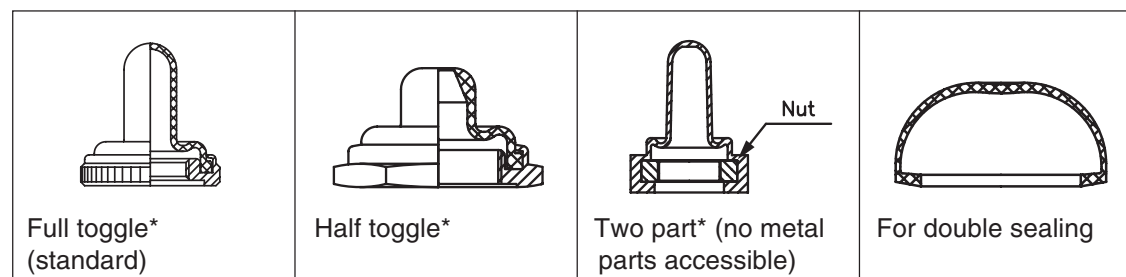



## EXAMPLES OF MOUNTING



## For toggle bushing 6 x 0.75 (.236 x 0.75) - 5500 series



| NUT                             | FULL TOGGLE SILICONE BOOTS |         |         |         |
|---------------------------------|----------------------------|---------|---------|---------|
|                                 | Black                      | Red     | Green   | White   |
| <b>Knurled</b><br>Nickel plated | U1341                      | U1341-6 | U1341-3 | U1341-7 |
| <b>Knurled</b><br>Matte black   | U1343                      | U1343-6 | U1343-3 | U1343-7 |
| <b>Hex</b><br>Nickel plated     | U1302                      | U1302-6 | U1302-3 | U1302-7 |
| <b>Hex</b><br>Matte black       | U1304                      | U1304-6 | U1304-3 | U1304-7 |




# SEALING BOOTS FOR SWITCHES

## For toggle bushing 6,35-40NS (1/4-40NS) - 5000 and 11000 series



| NUT                             | FULL TOGGLE SILICONE BOOTS |         |         |         |
|---------------------------------|----------------------------|---------|---------|---------|
|                                 | Black                      | Red     | Green   | White   |
| <b>Knurled</b><br>Nickel plated | U1331                      | U1331-6 | U1331-3 | U1331-7 |
| <b>Knurled</b><br>Matte black   | U1333                      | U1333-6 | U1333-3 | U1333-7 |
| <b>Hex</b><br>Nickel plated     | U1229                      | U1229-6 | U1229-3 | U1229-7 |
| <b>Hex</b><br>Matte black       | U1231                      | U1231-6 | U1231-3 | U1231-7 |

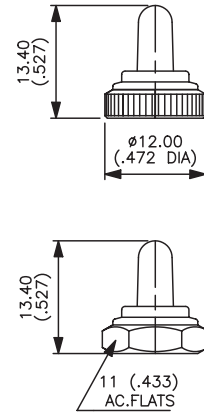


## For toggle bushing 6,35-40NS (1/4-40NS) - 5000 and 11000 series



| NUT | SILICONE BOOTS (supplied as 2 separate parts) |         |         |         |
|-----|-----------------------------------------------|---------|---------|---------|
|     | Black                                         | Red     | Green   | White   |
|     | U5149                                         | U5149-6 | U5149-3 | U5149-7 |


When boot is mounted onto panel, metal parts of switch are completely covered by insulation.



## For toggle bushing 10 x 0.75 (.393 x 0.75) - 10600 series




| KNURLED NUT   | FULL TOGGLE SILICONE BOOTS |         |         |         |
|---------------|----------------------------|---------|---------|---------|
|               | Black                      | Red     | Green   | White   |
| Nickel plated | U1612                      | U1612-6 | U1612-3 | U1612-7 |
| Matte black   | U1614                      | U1614-6 | U1614-3 | U1614-7 |



## For toggle bushing 11,9-32 (15/32-32NS) - 12000, 3500 and 6000 series



| HEX NUT       | FULL TOGGLE SILICONE BOOTS |         |         |         |
|---------------|----------------------------|---------|---------|---------|
|               | Black                      | Red     | Green   | White   |
| Nickel plated | U1031                      | U1031-6 | U1031-3 | U1031-7 |
| Matte black   | U1024                      | U1024-6 | U1024-3 | U1024-7 |



# SEALING BOOTS FOR SWITCHES

For toggle bushing 11,9-32NS (15/32-32NS) - 12000, 3500 and 6000 series




| HEX NUT       | HALF TOGGLE SILICONE BOOTS |         |         |         |
|---------------|----------------------------|---------|---------|---------|
|               | Black                      | Red     | Green   | White   |
| Nickel plated | U1600                      | U1600-6 | U1600-3 | U1600-7 |
| Matte black   | U1602                      | U1602-6 | U1602-3 | U1602-7 |



For toggle bushing 12 X 0.75 SI (.472 X 0.75 IS) - 4450, 4650 and 1600 series




| HEX NUT       | FULL TOGGLE BLACK NEOPRENE BOOTS |
|---------------|----------------------------------|
| Nickel plated | U09                              |
| Matte black   | U223                             |



For toggle bushing 12 x 0.75 SI (.472 x 0.75 IS) - 400, 500, 600H, 6-600H, 600SH, 660, 1000, 1500 and 3600 series




| HEX NUT       | FULL TOGGLE SILICONE BOOTS          |         |         |         |
|---------------|-------------------------------------|---------|---------|---------|
|               | Black                               | Red     | Green   | White   |
| Nickel plated | U1565                               | U1565-6 | U1565-3 | U1565-7 |
| Matte black   | U1567                               | U1567-6 | U1567-3 | U1567-7 |
|               | FULL TOGGLE BLACK<br>NEOPRENE BOOTS |         |         |         |
| Nickel plated | U851                                |         |         |         |
| Matte black   | U853                                |         |         |         |



For toggle bushing 12 x 0.75 SI (.472 x 0.75 IS) - 400, 500, 600H, 6-600H, 660, 1000 and 3600 series



| HEX NUT       | HALF TOGGLE SILICONE BOOTS          |         |         |         |
|---------------|-------------------------------------|---------|---------|---------|
|               | Black                               | Red     | Green   | White   |
| Nickel plated | U1151                               | U1151-6 | U1151-3 | U1151-7 |
| Matte black   | U1153                               | U1153-6 | U1153-3 | U1153-7 |
|               | HALF TOGGLE BLACK<br>NEOPRENE BOOTS |         |         |         |
| Nickel plated | U598                                |         |         |         |
| Matte black   | U600                                |         |         |         |



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# SEALING BOOTS FOR SWITCHES

For pushbutton bushing 4 x 0.70 (.157 x 0.70) - 9500 series





| HEX NUT       | PUSHBUTTON SILICONE BOOTS |         |         |         |
|---------------|---------------------------|---------|---------|---------|
|               | Black                     | Red     | Green   | White   |
| Nickel plated | U1829                     | U1829-6 | U1829-3 | U1829-7 |
| Matte black   | U1831                     | U1831-6 | U1831-3 | U1831-7 |



For pushbutton bushing 6,35-40NS (1/4-40NS) - 18000, 9000 and 13000 series




| NUT            | PUSHBUTTON SILICONE BOOTS |         |         |         |
|----------------|---------------------------|---------|---------|---------|
|                | Black                     | Red     | Green   | White   |
| <b>Knurled</b> |                           |         |         |         |
| Nickel plated  | U1401                     | U1401-6 | U1401-3 | U1401-7 |
| <b>Knurled</b> |                           |         |         |         |
| Matte black    | U1403                     | U1403-6 | U1403-3 | U1403-7 |
| <b>Hex</b>     |                           |         |         |         |
| Nickel plated  | U1318                     | U1318-6 | U1318-3 | U1318-7 |
| <b>Hex</b>     |                           |         |         |         |
| Matte black    | U1320                     | U1320-6 | U1320-3 | U1320-7 |



For pushbutton bushing 10 x 0.75 (.393 x 0.75) - 10400 series




| KNURLED NUT   | PUSHBUTTON SILICONE BOOTS |         |         |         |
|---------------|---------------------------|---------|---------|---------|
|               | Black                     | Red     | Green   | White   |
| Nickel plated | U1624                     | U1624-6 | U1624-3 | U1624-7 |
| Matte black   | U1626                     | U1626-6 | U1626-3 | U1626-7 |



For pushbutton bushing 11,9-32NS (15/32-32NS) - 13000X778 and 13000X768 series



| HEX NUT       | PUSHBUTTON SILICONE BOOTS |        |        |        |
|---------------|---------------------------|--------|--------|--------|
|               | Black                     | Red    | Green  | White  |
| Nickel plated | U589                      | U589-6 | U589-3 | U589-7 |
| Matte black   | U590                      | U590-6 | U590-3 | U590-7 |



# SEALING BOOTS FOR SWITCHES

For pushbutton bushing 12 x 0.75 SI (.472 x 0.75) - 1200, 4700 and 4800 series



| HEX NUT       | PUSHBUTTON SILICONE BOOTS       |         |         |         |
|---------------|---------------------------------|---------|---------|---------|
|               | Black                           | Red     | Green   | White   |
| Nickel plated | U1654                           | U1654-6 | U1654-3 | U1654-7 |
| Matte black   | U1656                           | U1656-6 | U1656-3 | U1656-7 |
|               | PUSHBUTTON BLACK NEOPRENE BOOTS |         |         |         |
| Nickel plated | U31                             |         |         |         |
| Matte black   | U225                            |         |         |         |
| Chrome plated | U224                            |         |         |         |



For double sealing IP series



|                           |
|---------------------------|
| TRANSPARENT SILICONE BOOT |
| U5125                     |



For external sealing on A02 series

|               |
|---------------|
| SILICONE BOOT |
| A02WPC        |



For 2600 series rocker switches



|                           |
|---------------------------|
| TRANSPARENT SILICONE BOOT |
| U2150                     |



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

# VL SERIES LED INDICATORS

## FEATURES

- Indicators with red, yellow or green built-in LED.
- Flatted bushing for anti-rotation.
- 2 bushing diameters: 6mm (.236") and 8mm (.314").
- Sealed and unsealed models.
- Bright chrome or matte black plated finishes.

## SPECIFICATIONS

|                                       |                                          |
|---------------------------------------|------------------------------------------|
| Insulation resistance:                | 1000 megohms min.                        |
| Dielectric strength:                  | 250 Vrms, 50 Hz min.                     |
| Electric life at high temperature:    | 72 hours at 85°C                         |
| Torque:                               | 1.25 Nm (.922 ft.lb.) max.applied to nut |
| Climatic category:                    | 40/085/21                                |
| Protection level (sealed models):     | IP67 per IEC 529                         |
| In accordance with NFC 93680 standard |                                          |

## LED SPECIFICATIONS

(T ambient = 25°C)

|                         |                           |
|-------------------------|---------------------------|
| Forward voltage:        | 2VDC ( $\leq 2.6V$ )      |
| Nominal current:        | 10mA                      |
| Max. surge current:     | 0.5 A ( $t_p < 10\mu s$ ) |
| Max. reversed voltage:  | 25V                       |
| Max. forward current:   | 40mA                      |
| Max. power dissipation: | 100mW                     |

## MATERIALS

|                     |                                                                                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Bushing and collar: | Brass, bright or matte black chrome plated                                                                                                          |
| Lens:               | Polycarbonate                                                                                                                                       |
| Hardware supplied:  | 1 nickel plated brass hex nut; 9mm (.354") across flats for 6mm (.236") dia. indicator or 10mm (.393") across flats for 8mm (.314") dia. indicator. |

### 6mm (.236") diameter - unsealed



| LED COLOR | BRIGHT FINISH | MATTE BLACK FINISH |
|-----------|---------------|--------------------|
| Red       | VL1000P600    | VL100GP600         |
| Yellow    | VL1000P500    | VL100GP500         |
| Green     | VL1000P300    | VL100GP300         |

Note: Bright finish is standard.

Arrow indicates bushing flat. Option: bushing without flat and lockwasher- on request




### 8mm (.314") diameter - unsealed



| LED COLOR | BRIGHT FINISH | MATTE BLACK FINISH |
|-----------|---------------|--------------------|
| Red       | VL3000P600    | VL300GP600         |
| Yellow    | VL3000P500    | VL300GP500         |
| Green     | VL3000P300    | VL300GP300         |

Note: Bright finish is standard.

Arrow indicates bushing flat. Option: bushing without flat and lockwasher- on request

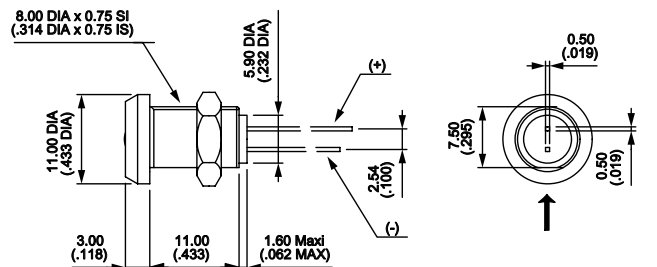

# VL SERIES LED INDICATORS

## 6mm (.236") diameter - sealed



| LED COLOR | BRIGHT FINISH | MATTE BLACK FINISH |
|-----------|---------------|--------------------|
| Red       | VL1CK0P600    | VL1CKGP600         |
| Yellow    | VL1CK0P500    | VL1CKGP500         |
| Green     | VL1CK0P300    | VL1CKGP300         |

Notes: Bright finish is standard. Lens cap is the same color as the LED.

Arrow indicates bushing flat. Option: bushing without flat and lockwasher- on request



## 8mm (.314") diameter - sealed



| LED COLOR | BRIGHT FINISH | MATTE BLACK FINISH |
|-----------|---------------|--------------------|
| Red       | VL3CK0P600    | VL3CKGP600         |
| Yellow    | VL3CK0P500    | VL3CKGP500         |
| Green     | VL3CK0P300    | VL3CKGP300         |

Note: Bright finish is standard. Lens cap is the same color as the LED.

Arrow indicates bushing flat. Option: bushing without flat and lockwasher- on request



## LED'S

Observe polarity of DC supply to LED's. Longer lead is anode (+). Shorter lead is cathode (-) on flat side of bushing (see drawing).

LED's are not removable.

LED's per customer specifications that meet drawings shown can be supplied - consult factory.



For 6mm (.236") indicators




For 8mm (.314") indicators



## STANDARD HARDWARE AND PANEL CUT-OUTS



For 6mm (.236") indicators



For 8mm (.314") indicators





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331