

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR20H100C

General Description

High voltage dual Schottky rectifier suited for switch mode power supplies and other power converters. This device is intended for use in medium voltage operation, and particularly, in high frequency circuits where low switching losses and low noise are required.

MBR20H100C is available in TO-220F-3, TO-220-3 and TO-220-3 (2) packages.

Main Product Characteristics

I_F (AV)	2×10A
V_{RRM}	100V
T_J	175°C
V_F (max)	0.64V

Features

- Low Forward Voltage: 0.64V @ 125°C
- High Surge Capacity
- 175°C Operating Junction Temperature
- 20A Total (10A Each Diode Leg)
- Guard-ring for Stress Protection
- Pb-free Package

Applications

- Power Supply Output Rectification
- Power Management
- Instrumentation

Mechanical Characteristics

- Case: Epoxy, Molded
- Epoxy Meets UL 94V-0 @ 0.125in.
- Weight (Approximately):
2Grams (TO-220-3, TO-220-3 (2) and TO-220F-3)
- Finish: All External Surfaces Corrosion Resistant and Terminal
- Leads are Readily Solderable
- Lead Temperature for Soldering Purposes:
260°C Maximum for 10 Seconds

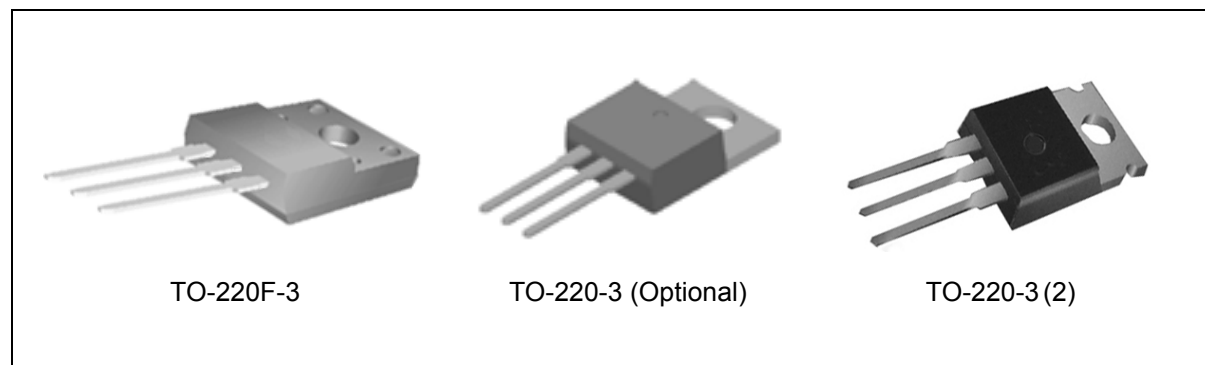


Figure 1. Package Types of MBR20H100C

Pin Configuration

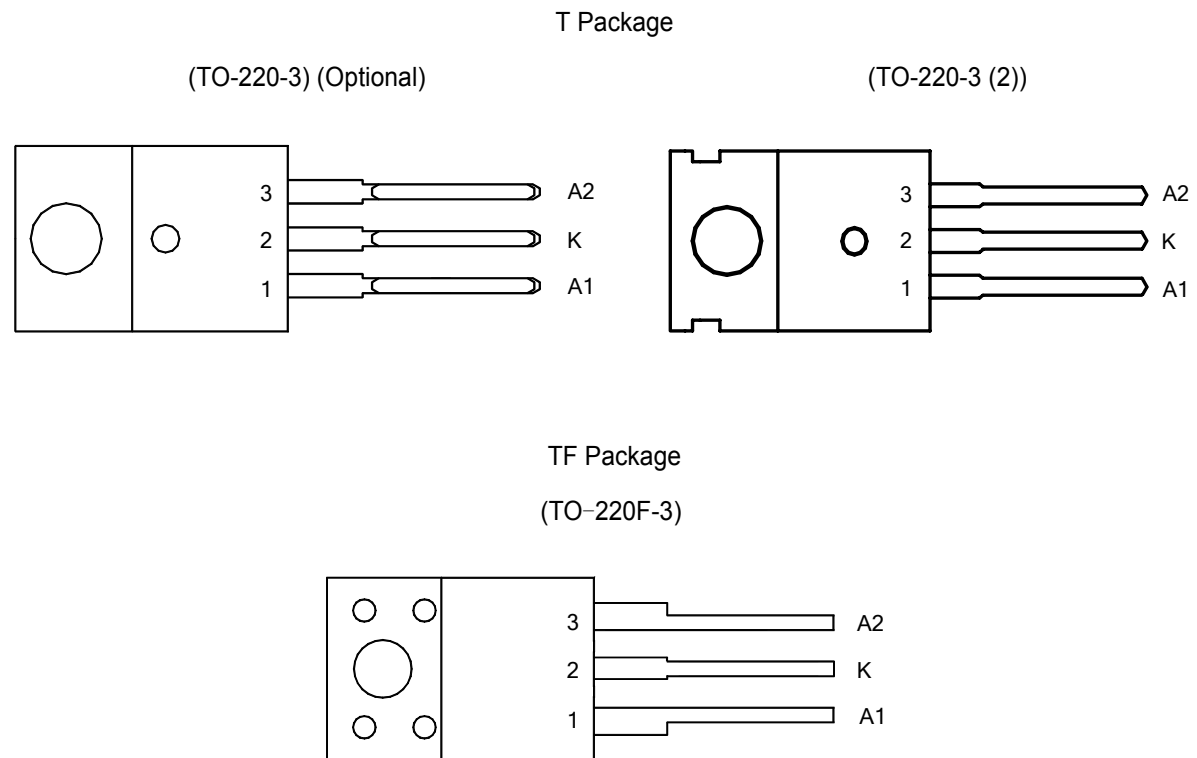


Figure 2. Pin Configuration of MBR20H100C (Top View)


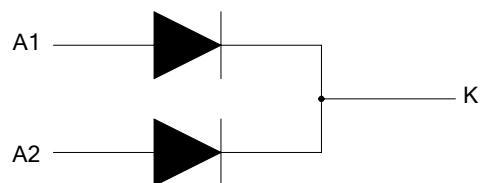


Figure 3. Internal Structure of MBR20H100C

Ordering Information

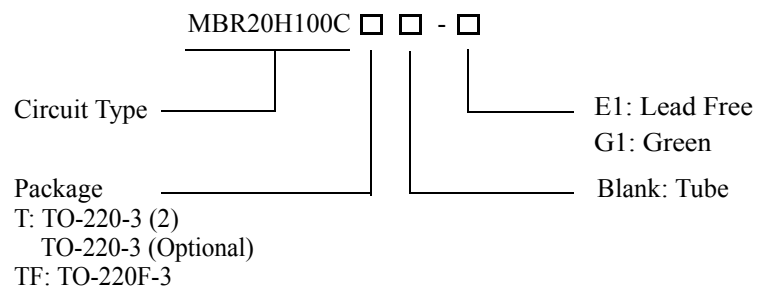

Package	Part Number		Marking ID		Packing Type
	Lead Free	Green	Lead Free	Green	
TO-220-3 (2)	MBR20H100CT-E1	MBR20H100CT-G1	MBR20H100CT-E1	MBR20H100CT-G1	Tube
TO-220F-3	MBR20H100CTF-E1	MBR20H100CTF-G1	MBR20H100CTF-E1	MBR20H100CTF-G1	Tube

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR20H100C

Absolute Maximum Ratings (Each Diode Leg) (Note 1)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	100	V
Average Rectified Forward Current (Rated V_R) $T_C=162^{\circ}\text{C}$	$I_F (AV)$	10	A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20kHz) $T_C=160^{\circ}\text{C}$	I_{FRM}	20	A
Non Repetitive Peak Surge Current (Surge Applied at Rated load Conditions Half Wave, Single Phase, 60Hz)	I_{FSM}	250	A
Operating Junction Temperature (Note 2)	T_J	175	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to 175	$^{\circ}\text{C}$
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/ μs
ESD (Machine Model=C)		>400	V
ESD (Human Body Model=3B)		>8000	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: The heat generated must be less than the thermal conductivity from Junction to Ambient: $dP_D/dT_J < 1/\theta_{JA}$.

Thermal Characteristics

Parameter	Symbol	Condition		Value	Unit
Maximum Thermal Resistance	θ_{JC}	Junction to Case	TO-220-3/ TO-220-3 (2)	2.0	$^{\circ}\text{C}/\text{W}$
			TO-220F-3	2.5	
	θ_{JA}	Junction to Ambient	TO-220-3/ TO-220-3 (2)	60	

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR20H100C

Electrical Characteristics (Each Diode Leg)

Parameter	Symbol	Condition	Value	Unit
Maximum Instantaneous Forward Voltage Drop (Note 3)	V_F	$I_F=10A, T_C=25^{\circ}C$	0.77	V
		$I_F=10A, T_C=125^{\circ}C$	0.64	
		$I_F=20A, T_C=25^{\circ}C$	0.88	
		$I_F=20A, T_C=125^{\circ}C$	0.73	
Maximum Instantaneous Reverse Current (Note 3)	I_R	Rated DC Voltage, $T_C=125^{\circ}C$	6.0	mA
		Rated DC Voltage, $T_C=25^{\circ}C$	0.0045	

Note 3: Pulse Test: Pulse Width=300 μ s, Duty Cycle $\leq$ 2.0%.

Typical Performance Characteristics

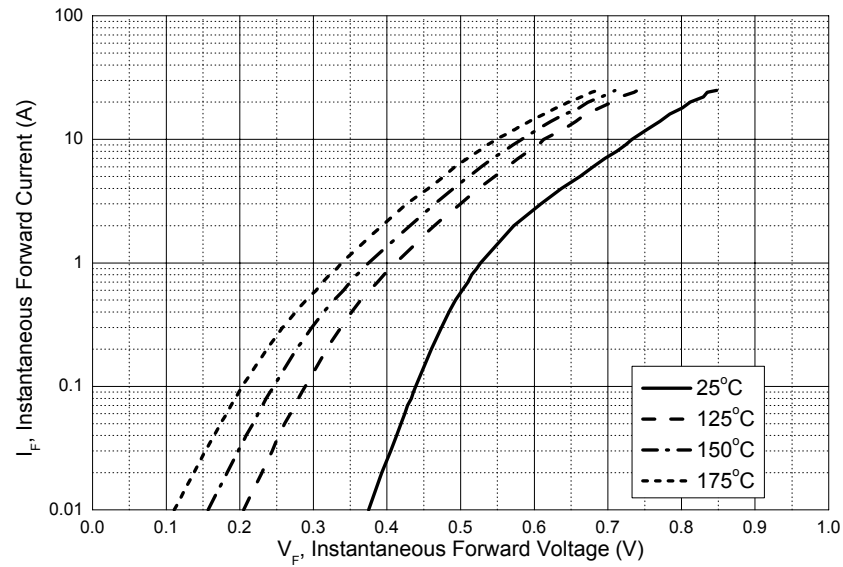


Figure 4. Typical Forward Voltage

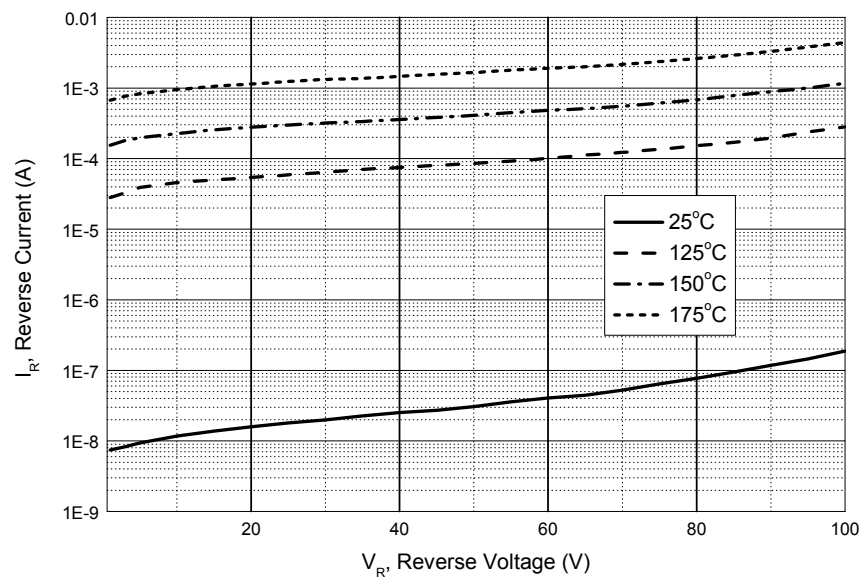


Figure 5. Typical Reverse Current

Typical Performance Characteristics (Continued)

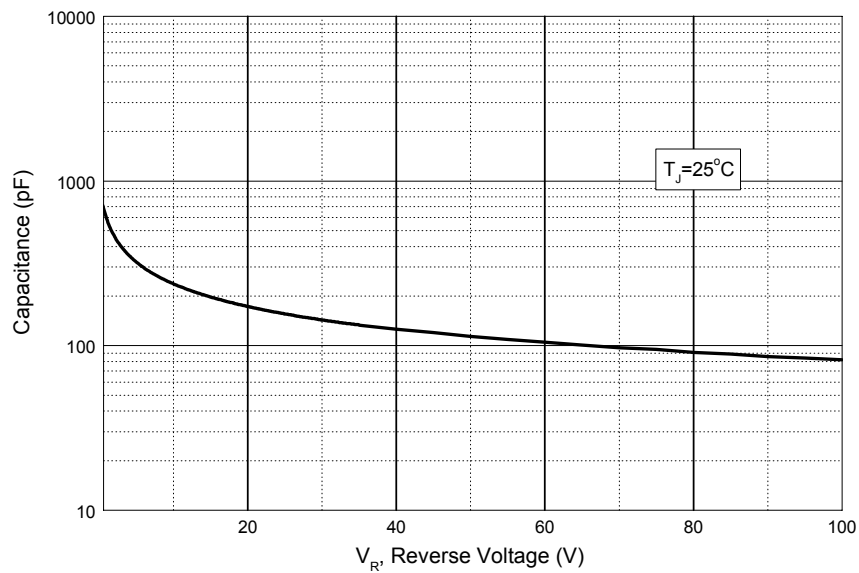


Figure 6. Capacitance vs. V_R , Reverse Voltage


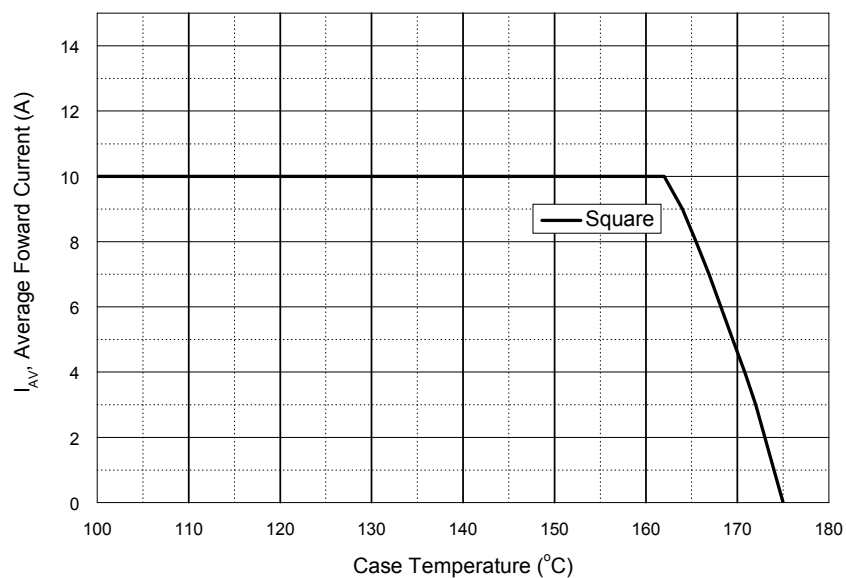


Figure 7. Average Forward Current vs. Case Temperature (Square, Each Diode)

Mechanical Dimensions

TO-220-3
(Optional)

Unit: mm(inch)

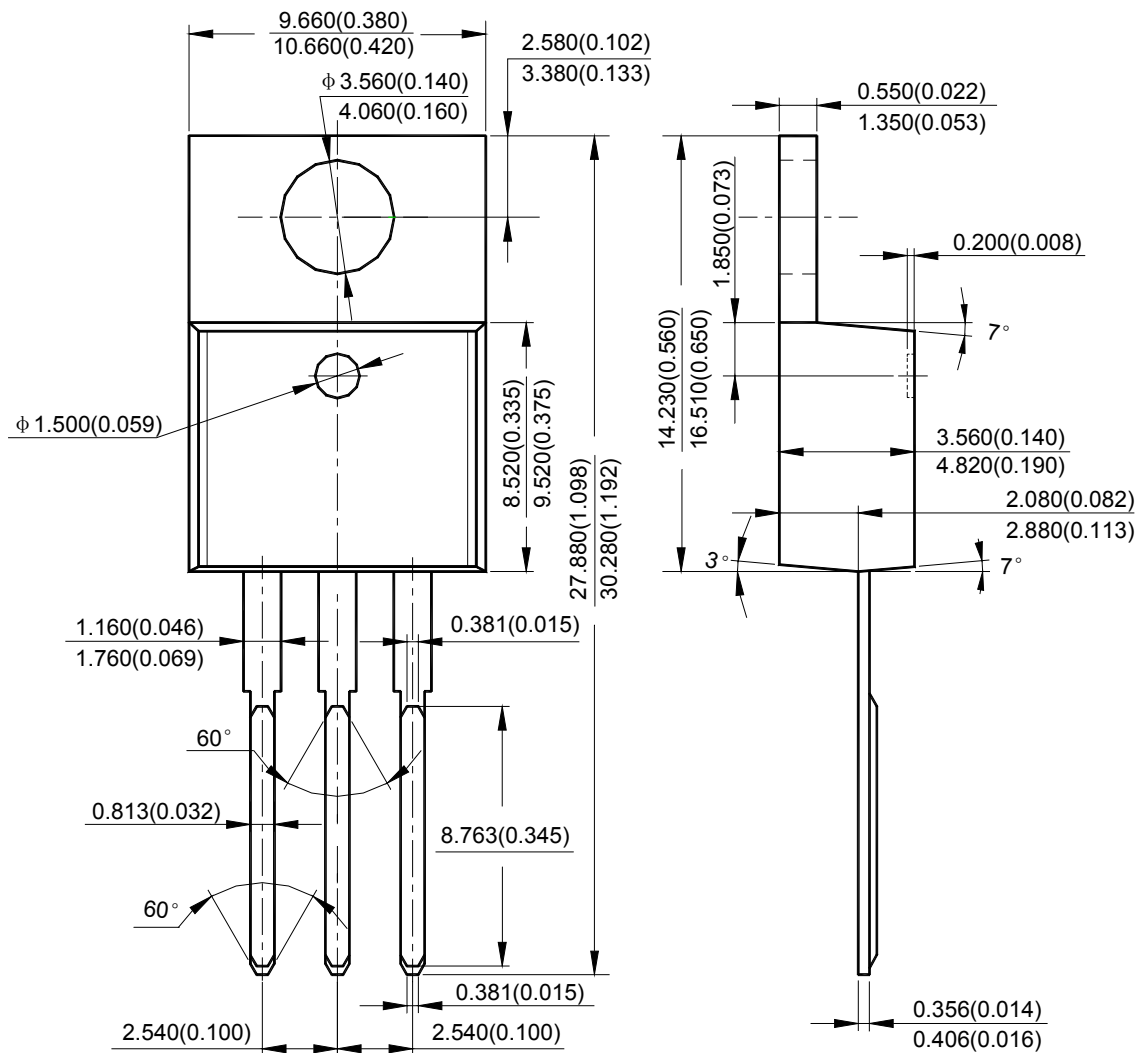



KERSEMI


HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR20H100C

Mechanical Dimensions (Continued)

TO-220-3 (2)


Unit: mm(inch)

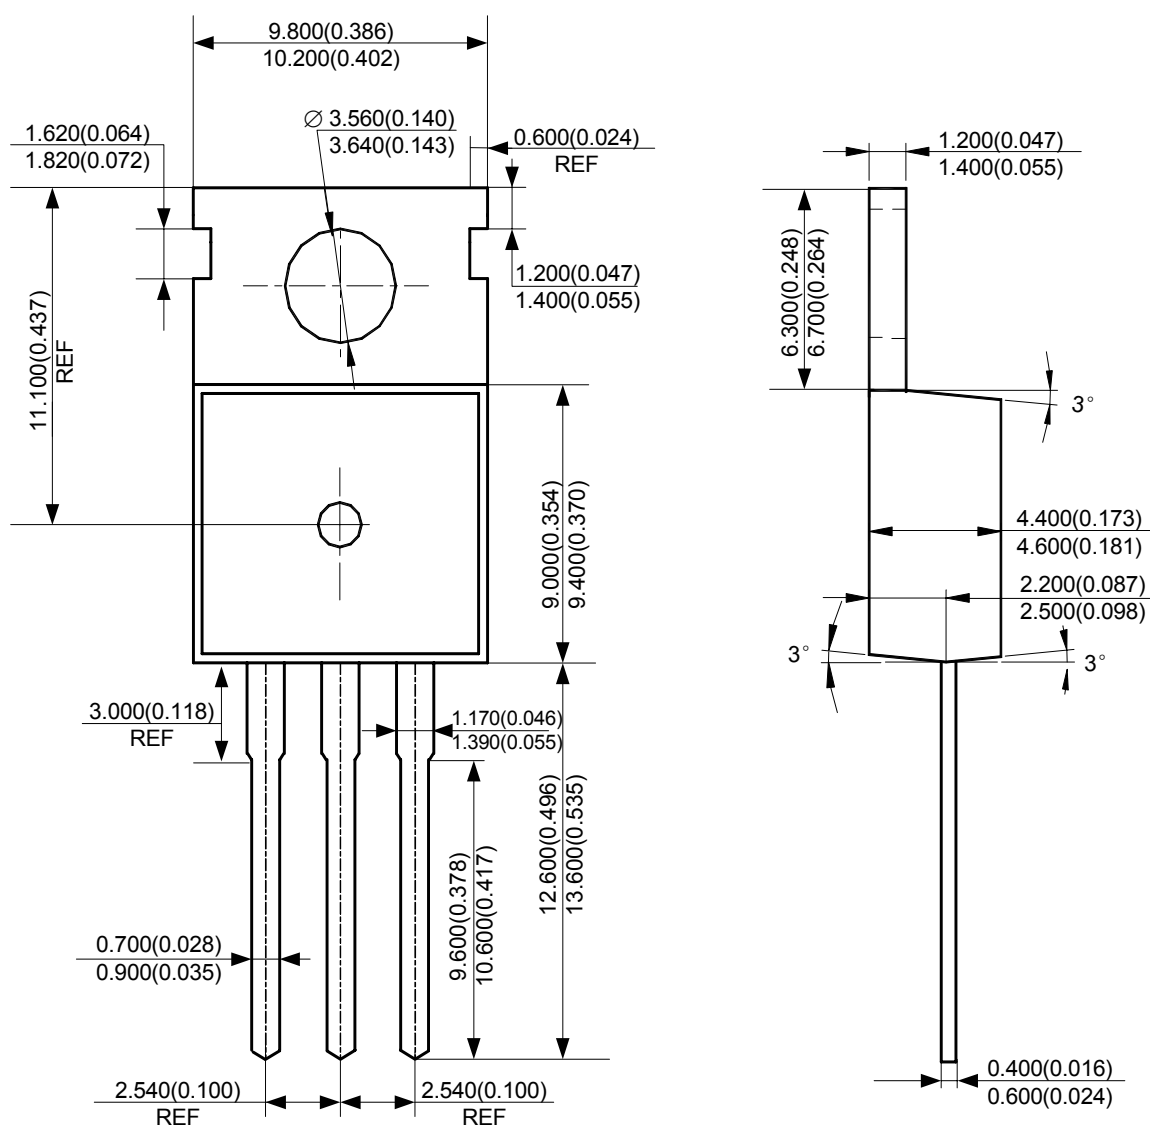

Mechanical Dimensions (Continued)

TO-220F-3

Unit: mm(inch)

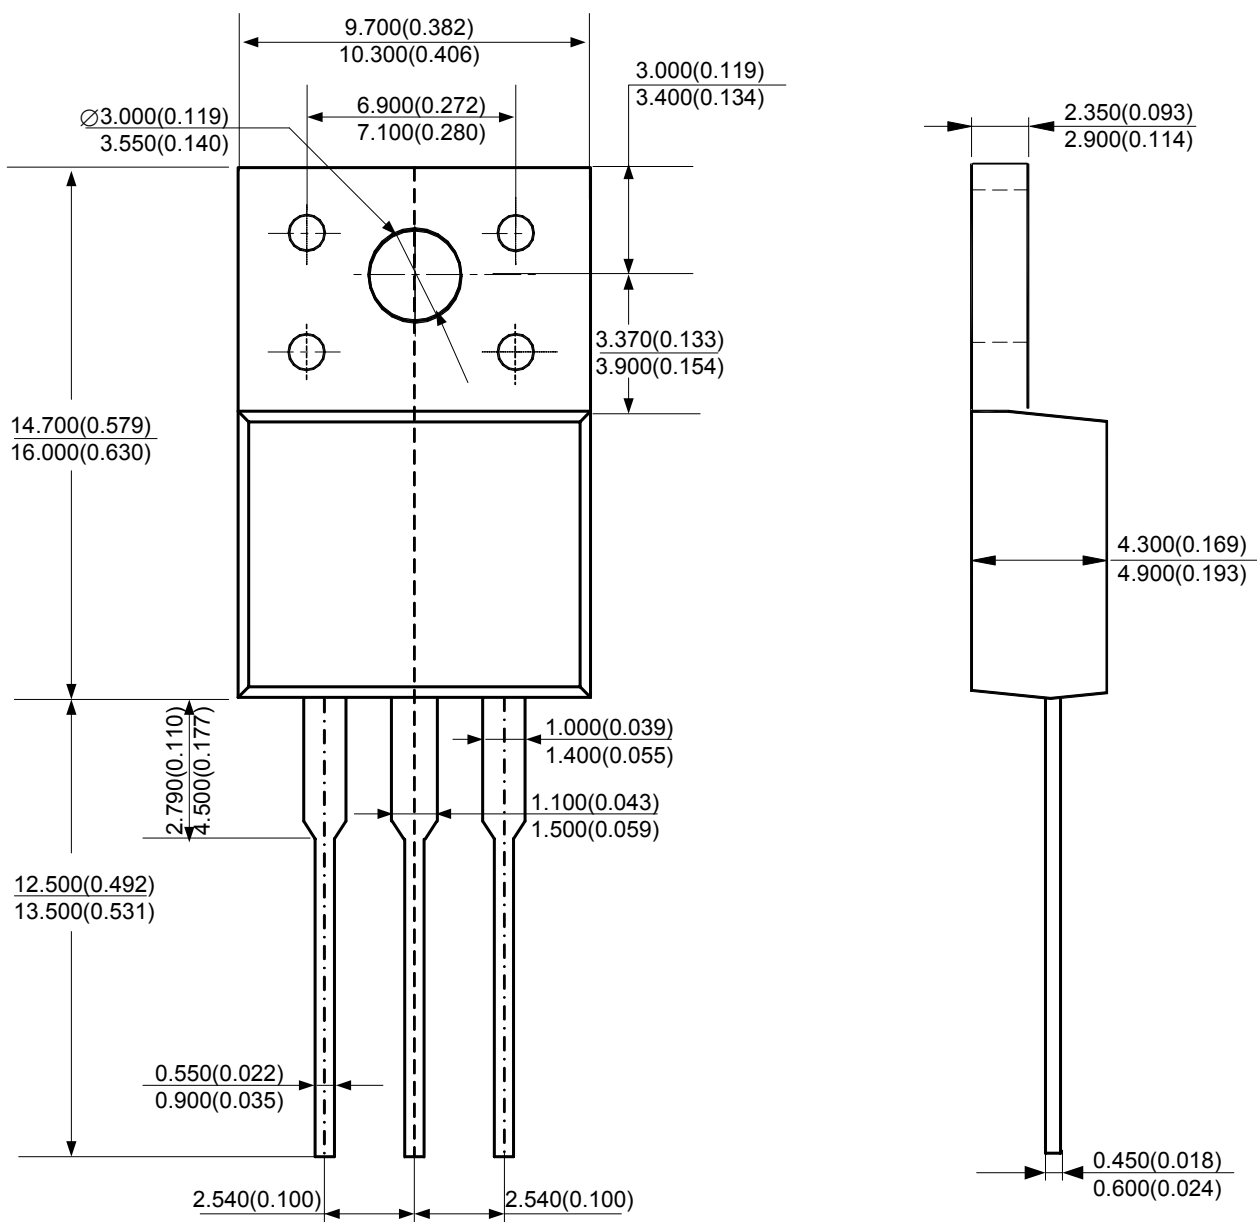



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331