




**Powerful Sensing Solutions**

[www.memsic.com](http://www.memsic.com)

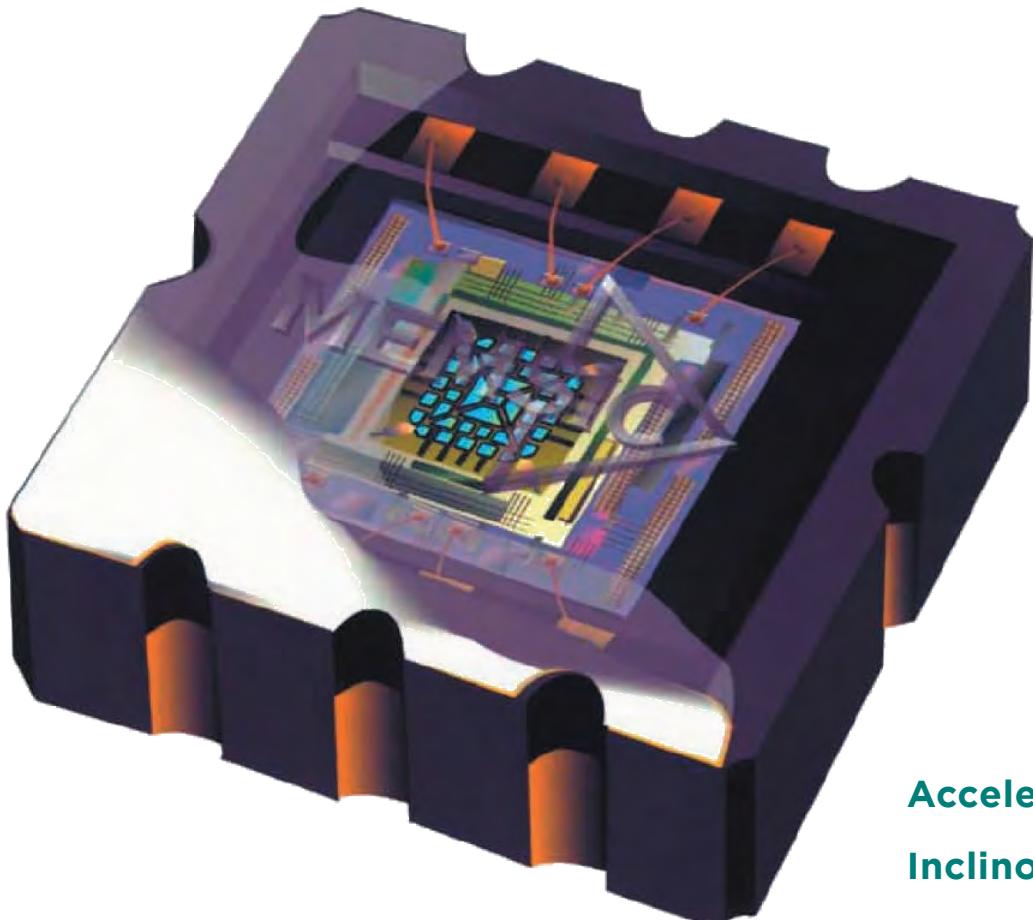


**Accelerometers**

**Inclinometers**

**Magnetometers**

**Flow Sensors**

**Inertial Systems**

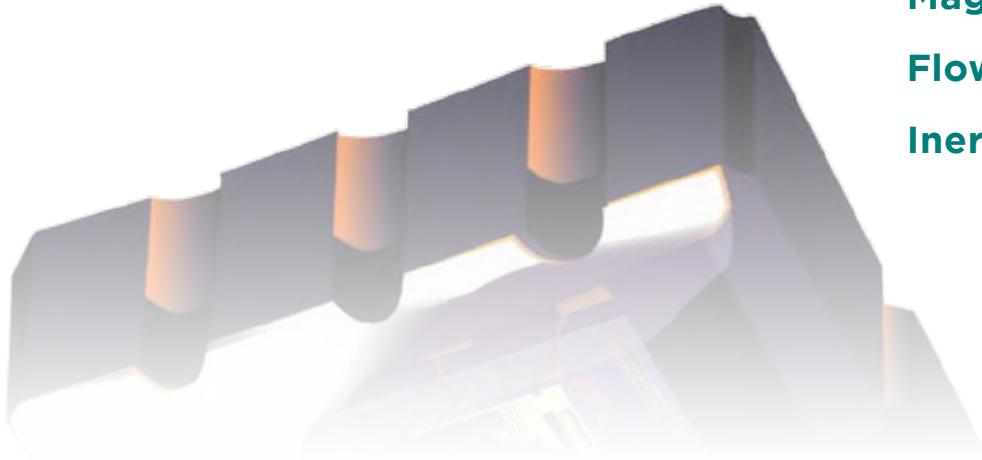

2016 MEMSIC, Inc.




# Powerful Sensing Solutions

[www.memsic.com](http://www.memsic.com)

# Accelerometers



Patented Thermal Accelerometer Technology

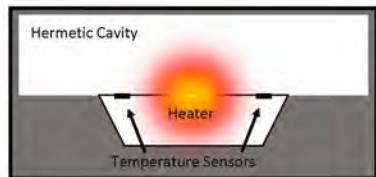

Thermal accelerometer uses heated gas as "proof mass"

## Typical Applications:

- Inclination Sensing
- Electronic Stability Control
- Motorcycle Tip-Over
- Car Alarm
- Headlight Leveling
- Navigation Assist
- Digital Cameras
- Keystone Correction
- Display Orientation
- Platform Stabilization
- . . . and many more

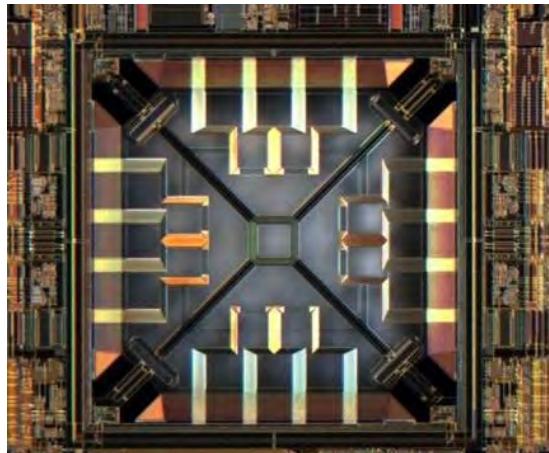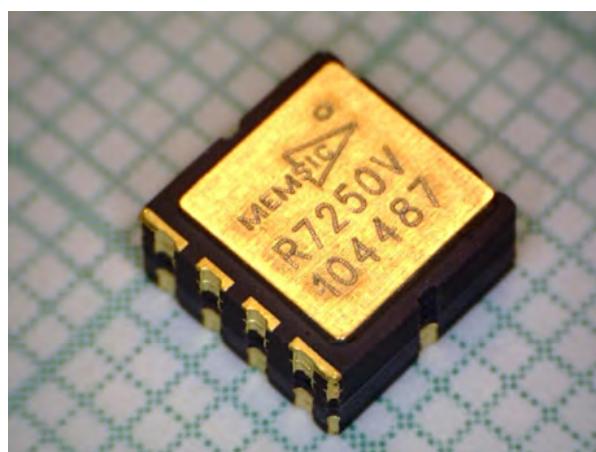

Part Number	Axes	Range (+/- g)	Output
MXD6240AU	2 (XY)	8	1-pin
MXC6244AU	2 (XY)	8	I2C
MXP7205VF	2 (XY)	5	SPI
MXP7205VW	2 (XZ)	5	SPI
MXR7305VF	2 (XY)	5	Analog
MXR7250VW	2 (XZ)	5	Analog
MXR9150MZ	3 (XYZ)	5	Analog
MXC6245XU	2 (XY)	2	I2C
MXC6232xMP	2 (XY)	2	I2C
MXC6255XU	2 (XY)	2	I2C
MXC6255XC	2 (XY)	2	I2C
MXC6235xQB	2 (XY)	1.5	I2C
MXC6232xEP	2 (XY)	1.5	I2C
MXR6500MP	2 (XY)	1.7	Analog
MXR9500MZ	3 (XYZ)	1.7	Analog
MXR7900CF	2 (XY)	1	Analog
MXA2500EL	2 (XY)	1	Analog
MXR2999EL	2 (XY)	0.5	Analog

\* Partial Product List – For more complete list go to: <http://www.memsic.com/accelerometers/>



# Powerful Sensing Solutions

www.memsic.com

MEMSIC's unique thermal technology uses heated gas molecules to detect acceleration and is the fundamental principle behind our accelerometer IC products. This technology offers several advantages over the solid proof-mass structure, including:

- No measurable resonance (immunity to vibration)
- Virtually indestructible (50,000g shock tolerance)
- No stiction
- No detectable hysteresis
- Excellent zero-g offset stability
- Sensor & electronics integrated onto monolithic IC



Sensitivity	Offset Drift (mg/ $^{\circ}$ C)	Bandwidth (Hz)	Noise (mg rms)	Supply Voltage (V)	Size (mm)	Temp. Comp. (ON OFF)	Other Features
N/A (Tip Over Comparator, 8 prog. angles)				2.7 – 5.5	3 x 3	On	Vibration Filter
1024 c/g	0.1	11	1.5	2.7 – 5.5	3 x 3	On	Prog Vibration Filter
800 c/g	0.1	29	2.7	4.5 - 5.2	5 x 5	On	AEC-Q100
800 c/g	0.1	29	2.7	4.5 - 5.3	5.5 x 5.5	On	AEC-Q100
0.25 V/g	0.3	27	3.1	4.5 - 5.3	5 x 5	On	AEC-Q100
0.25 V/g	0.3	27	3.1	4.5 - 5.3	5.5 x 5.5	On	AEC-Q100
0.15 V/g	1.0	17	2.5	2.7 - 3.6	7 x 7	On	True 3-axis perf.
1024 c/g	0.1	11	1.5	2.7 – 3.6	3 x 3	On	Low Offset T.C.
512 c/g	0.8	17	0.7	2.7 - 3.6	5 x 5	On	Temp Output
64 c/g	0.3	10	0.6	2.5 - 5.5	3 x 3	On	Low Cost 8-bit
64 c/g	0.6	10	0.9	2.5 - 5.5	1.2 x 1.7	On	Ultra-small size
512 c/g	0.1	8	0.4	2.7 - 3.6	5 x 5	Off	Temp Output
512 c/g	0.8	17	2.9	2.7 - 3.6	5.5 x 5.5	Off	Temp Output
0.5 V/g	1.5	17	1.6	2.7 - 3.6	5 x 5	On	
0.5 V/g	1.0	17	2.5	2.7 - 3.6	7 x 7	On	True 3-axis perf.
0.9 V/g	0.1	19	1.3	4.5 - 5.3	5 x 5	Off	AEC-Q100
0.5 V/g	0.4	17	0.8	3.0 - 5.5	5 x 5	Off	Temp Output
1 V/g	0.4	17	0.8	3.0 - 5.3	5 x 5	Off	Temp Output

\* For more complete info go to: <http://www.memsic.com/accelerometers/>



**Powerful Sensing Solutions**

[www.memsic.com](http://www.memsic.com)

# Magnetometers

MEMSIC offers magnetic sensor components for high performance OEM applications, as well as rugged magnetic modules for applications where a turnkey solution is required. MEMSIC magnetometers are used in millions of cell phones and tablets, due to their exceptional noise, wide dynamic range, and low power consumption.

MEMSIC's family of magnetometer components are available in both dual-axis and three-axis versions. They are based on anisotropic magnetoresistive (AMR) Permalloy technology sensors, which have superior accuracy and response time characteristics, while consuming significantly less power than alternative technologies. The MEMSIC magnetometers are ideal for electronic compass, GPS navigation and magnetic field detection applications.

MEMSIC simplifies sensor integration by providing calibration and Electronic Compass libraries, reducing design complexity and accelerating time-to-market.

The Electronic Compass libraries provide a highly accurate tilt compensated electronic compass with calibration that supports MEMSIC's latest generation of ultra low noise, low power magnetometers. High compass accuracy is enabled by the high performance and low noise of MEMSIC's AMR sensors.

These libraries leverage MEMSIC's many years of experience as an IMU developer to provide a high performance Electronic Compass that will address the most demanding applications.



Part Number	Axes	FSR (+/- G)	Interface	Sensitivity	Noise (mG rms)	Supply Voltage (V)	Supply Current* (mA)
MMC246xMT	2	6	I2C	4096 c/G	0.8	1.62 - 3.6	0.05
MMC328xMA	3	8	I2C	512 c/G	1.0	1.62 - 3.6	0.3
MMC5883MA	3	8	I2C	4096 c/G	0.6	1.62 - 3.6	0.1
MMC3416xPJ	3	16	I2C	2048 c/G	1.5	1.62 - 3.6	0.02
MMC3524xPJ	3	24	I2C	1024 c/G	2.0	1.62 - 3.6	0.02
MMC3530KJ	3	30	I2C	1024 c/G	1.5	1.62 - 3.6	0.02


**NEW**

\* Measured @ 7 conv/sec



# Powerful Sensing Solutions

[www.memsic.com](http://www.memsic.com)

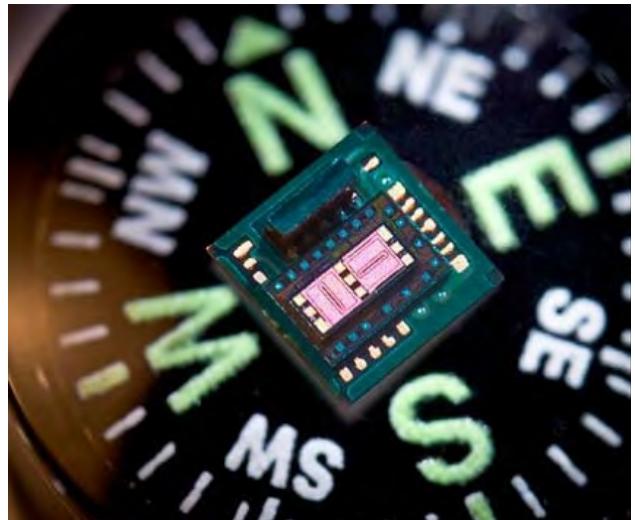

Sleep Mode	Size (mm)	Automotive Qualified	S/R Offset Nulling
X	2 x 2	Call	X
X	2 x 2		
X	3 x 3	Call	X
X	1.6 x 1.6		X
X	1.6 x 1.6		X
X	1.4 x 1.4		X

## Typical Applications:

- Mobile Handsets/Tablets
- Wearables
- Head-Mounted Displays
- PND's
- Electronic Compass
- Detecting small magnetic fields
- ...and many more



2016 MEMSIC, Inc.



**Powerful Sensing Solutions**


[www.memsic.com](http://www.memsic.com)

# Flow Sensors

MEMSIC's flow sensors offer class leading dynamic range, power consumption, ease-of-use and integration. These sensors are designed to serve the need for mass flow sensing in applications such as process control, HVAC, medical, chemical, food and beverage, natural gas metering, and others. The MEMS mass flow sensing technology offers many advantages over traditional diaphragm gas flow measurement, including but not limited to:

- High rangeability (turn-down ratio)
- High accuracy
- Excellent low flow sensitivity
- Direct mass flow sensing
- Low pressure drop
- Very low power consumption
- No moving parts for long term reliability

MEMSIC's mass flow sensing module is based on patented MEMS thermal technology.

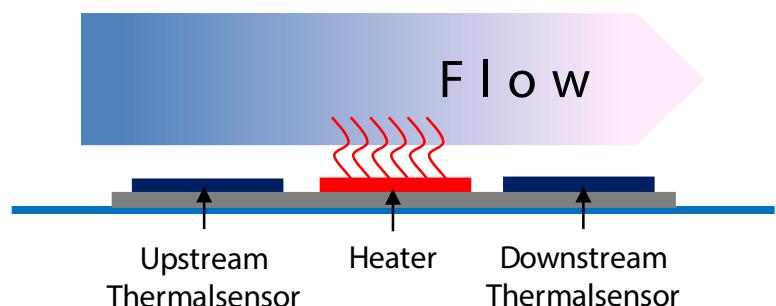

We are pleased to introduce two flow sensor product lines: MFC2000 and MFM2000. The MFC2000 is a rugged flow sensor capable of high inlet pressure up to 8 bar and available in PPSU or Aluminum. The MFM2000 is a low pressure drop sensor intended for low pressure medical ventilation and natural gas metering applications and can be configured with different types of inlet and outlet. Both can be offered with I2C or SPI interface.



MFC2000 bi-directional flow sensor.



Modular MFM2000 bi-directional flow sensor.

Part Number	Flow Range (SLM)	Accuracy (% m.v.)	Pressure Drop (mbar)	Oper. Mode (mA)	Supply Voltage (V)
MFC2000	+/- 30	3%	4	5	2.7 to 5.5
MFM2070	+/-70	3%	1.5	5	2.7 to 5.5
MFM2100	+/- 100	3%	1.5	5	2.7 to 5.5
MFM2250	+/- 250	3%	6.4	5	2.7 to 5.5



**Powerful Sensing Solutions**

[www.memsic.com](http://www.memsic.com)

# Differential Pressure Sensors

MEMSIC's new MDP200 product family of thermal differential pressure sensors has excellent performance for a wide variety of applications.

Features include:

- +/- 500 Pa (Custom Range Available)
- Digital I2C
- 16 bit Resolution
- 31.5% Accuracy Full Scale or
- +/- 3.0% of reading
- Barb Fittings or Manifold Mount
- Straight or Right Angle Pins
- > 0.25% Linearity

The MDP200 has high accuracy, high stability, and is competitively priced. The MDP200 is perfect for medical, industrial, and HVAC applications.

MEMSIC's new MDP200 series product family is modular and highly configurable. This includes options for barb or manifold mount.



Manifold Mount  
Straight Pins


Barb Mount  
90 Degree Pins



Industrial Applications



Medical Applications

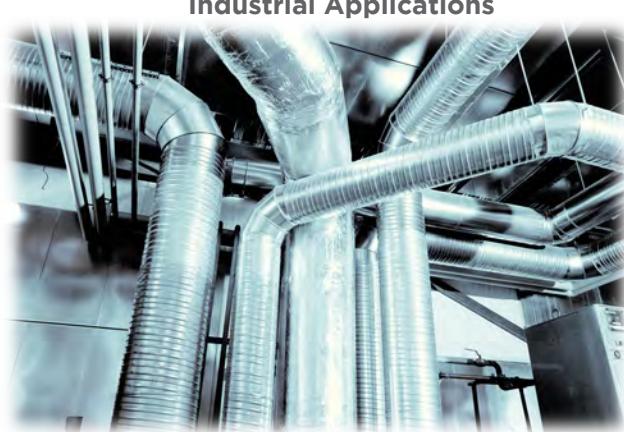

Part Number	Flow Range (Pa)	Accuracy (% m.v.)	Output	Oper. Mode (mA)	Supply Voltage (V)
MDP200	+/-500	3%	I2C/Analog	5	2.7 to 5.5



**Powerful Sensing Solutions**

[www.memsic.com](http://www.memsic.com)

# Inertial Measurement Units

- Patented SmartSensing™ Technology enables high accuracy and low bias drift
- Selection of 6-axis (gyro/accel) and 9-axis (gyro/accel/mag) sensor configurations
- Standard interfaces support remote mount (RS-232/422) and embedded (SPI/UART) applications
- Rugged enclosures for demanding environments and miniature modules for direct µP integration



**IMU800**

**IMU440**

**IMU350**

**IMU380**

Part Number	Gyro Range (+/- °/s)	Accel Range (+/- g)	Mag Range (+/- G)	Gyro Bias (°/hr)	Accel Bias (µg)	Interface	Package
IMU800CA-200	200	2	-	3	10	RS-232 RS-422	Standalone
IMU800CA-210	200	10	-	3	10	RS-232 RS-422	Standalone
<b>NEW</b> IMU480ZA-400	400	8	-	5	10	SPI UART	Embedded
<b>NEW</b> IMU480ZA-409	400	8	4	5	10	SPI UART	Embedded
IMU440CA-200	200	4	-	10	10	RS-232	IP66 Rated
IMU440CA-400	400	10	-	20	10	RS-232	IP66 Rated
IMU380ZA-200	200	4	-	10	20	SPI UART	Embedded
IMU380ZA-209	200	4	4	10	20	SPI UART	Embedded
IMU380ZA-400	400	8	-	10	20	SPI UART	Embedded
IMU380ZA-409	400	8	4	10	20	SPI UART	Embedded
IMU350CA-300	300	3	-	12	50	RS-232 RS-422	Standalone
<b>NEW</b> IMU280ZA-200	200	4	-	30	50	SPI UART	Embedded Module



**Powerful Sensing Solutions**

[www.memsic.com](http://www.memsic.com)

# Attitude Heading Reference Systems (AHRS) Inertial Navigation Systems (INS)

- Patented SmartSensing™ technology combines EKF algorithms to achieve highest accuracy
- Flexible AHRS and INS system configurations with internal and external GPS receiver options
- Standard interfaces support remote mount (RS-232/422) and embedded (SPI/UART) applications
- Rugged enclosures for demanding environments and miniature modules for direct µP integration



AHRS500



NAV440



INS380



AHRS380

Attitude and Heading Reference System (AHRS)							
Part Number	Attitude Accuracy (°)	Heading Accuracy (°)	Gyro Range (+/- °/s)	Accel Range (+/- g)	Mag Range (+/- G)	Interface	Package
AHRS500CA-324	1.0	2.0	200	10	1	RS-232 RS-422	IP67 Rated
AHRS440CA-200	0.2	1.0	200	4	1	RS-232	IP66 Rated
AHRS440CA-400	0.2	1.0	400	10	1	RS-232	IP66 Rated
<b>NEW</b> AHRS380SA-200	0.2	1.0	200	4	4	RS-232 RS-422	Standalone
<b>NEW</b> AHRS380SA-400	0.2	1.0	400	8	4	RS-232 RS-422	Standalone
AHRS380ZA-200	0.2	1.0	200	4	4	SPI UART	Embedded
AHRS380ZA-400	0.2	1.0	400	8	4	SPI UART	Embedded

Inertial Navigation Systems (GPS/INS)							
Part Number	Position Accuracy (m CEP)	Velocity Accuracy (m/s)	Attitude Accuracy (°)	Heading Accuracy (°)	GPS Receiver	Interface	Package
NAV440CA-200	2.5	0.4	0.2	1.0	Internal	RS-232	IP66 Rated
<b>NEW</b> INS380SA-200	2.5	0.1	0.2	1.0	Internal	RS-232 RS-422	Standalone
<b>NEW</b> INS380ZA-200	2.5	0.1	0.2	1.0	External	SPI UART	Embedded



**Powerful Sensing Solutions**


[www.memsic.com](http://www.memsic.com)

# Inclinometers

- Patented SmartSensing™ technology enables high accuracy in static and dynamic conditions
- Programmable Tilt Alarm features for safety system applications
- Analog and digital interfaces for easy integration into control systems
- Selection of enclosures to support a wide variety of operating environments



**CXTLA01**

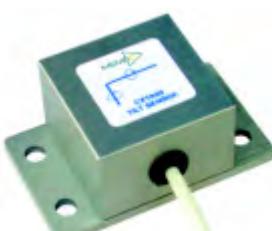

**CXTLA02-AL**



**CXTILT02-EC**



**MTLT1xxD**

Part Number	# of Axes	Operating Condition	Range (+/- °)	Resolution Output (° rms)	Vin (V)	Interface	Enclosure
<b>NEW</b> MTLT101D	2(XY)	Dynamic	180	0.1	Digital	9-32	RS-232 IP67 Plastic
<b>NEW</b> MTLT105D	2(XY)	Dynamic	180	0.5	Digital	9-32	RS-232 IP67 Plastic
<b>NEW</b> MTLT101S	2(XY)	Static	180	0.1	Digital	9-32	RS-232 IP67 Plastic
<b>NEW</b> MTLT105S	2(XY)	Static	180	0.5	Digital	9-32	RS-232 IP67 Plastic
<b>NEW</b> MTLT110S	2(XY)	Static	180	1.0	Digital	9-32	RS-232 IP67 Plastic
CXTILT02EC	2(XY)	Static	75	0.05	Digital	8-30	RS-232 Aluminium
CXTA02-AL-T	2(XY)	Static	75	0.05	Analog	6-30	Analog Aluminium
CXTA02-T	2(XY)	Static	75	0.05	Analog	6-30	Analog Nylon
CXTLA02-AL-T	2(XY)	Static	20	0.03	Analog	6-30	Analog Aluminium
CXTA01-T	1(XY)	Static	75	0.05	Analog	6-30	Analog Nylon
CXTLA02-T	2(XY)	Static	20	0.03	Analog	6-30	Analog Nylon
CXTLA01-T	1(XY)	Static	20	0.03	Analog	6-30	Analog Nylon



**Powerful Sensing Solutions**

[www.memsic.com](http://www.memsic.com)

# Inertial Systems Applications

---



**Precision**  
Farming



**Mobile**  
Surveying



**Stability**  
Control



**Green**  
Energy



**Ruggedized**  
Construction






# Powerful Sensing Solutions

[www.memsic.com](http://www.memsic.com)

# About Memsic

Founded in 1997, MEMSIC is focused on the development of products and solutions based on highly differentiated MEMS technology. We combine this MEMS technology with system integration and algorithms to deliver Powerful Sensing Solutions, which enable our customers to develop world-class products for a wide range of industrial, automotive, avionics, medical and consumer applications.

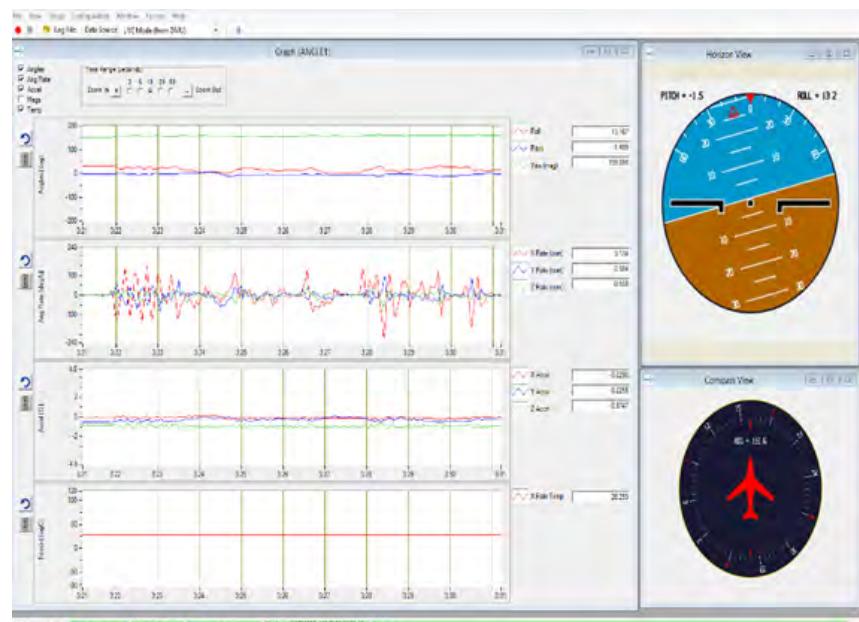

## Quality Certifications and Policies:

MEMSIC's Quality Management System is certified to ISO 9001:2008 and to ISO/TS 16949:2009.

The Environmental Management System is certified to ISO 14001:2004.

Product/Process Change Notice (PCN) policy is in compliance with JESD46C.

Product Discontinuance Notice (PDN) policy is in compliance with JESD48A.

## Corporate Locations:

Corporate Headquarters: One Tech Drive, Andover MA 01810  
Systems Division: 3180 De La Cruz Blvd., Santa Clara CA 95054

For a complete list of sales and distribution locations and contacts please see our web site.

**Learn more @ [www.memsic.com](http://www.memsic.com)**



## Customer Support:

MEMSIC offers world-class support to help our customers achieve their design goals and reduce time to market. Our application engineers and experts are available to solve complex sensor designs, and to provide complete turnkey solutions.

We also offer powerful design tools and evaluation systems for our products.



2016 MEMSIC, Inc.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331