Data Sheet

HIGH EFFICIENCY POWER SCHOTTKY RECTIFIER MBR3045C

General Description

High efficiency dual Schottky rectifier suited for switch mode power supplies and other power converters. This device is intended for use in medium voltage operation, and particularly, in high frequency circuits where low switching losses and low noise are required.

MBR3045C is available in TO-220-3, TO-220-3 (2) and TO-220F-3 packages.

Main Product Characteristics

$I_{F(AV)}$	2×15A
V_{RRM}	45V
T_J	150°C
V_F(max)	0.57V

Features

- Low Forward Voltage: 0.57V @ 125°C
- Low Power Loss/High Efficiency
- 150°C Operating Junction Temperature
- 30A Total (15A Each Diode Leg)
- Guard-ring for Stress Protection
- High Surge Capacity
- Pb-free Package

Mechanical Characteristics

- Case: Epoxy, Molded
- Epoxy Meets UL 94V-0 @ 0.125in.
- Weight (Approximately): 1.9Grams
- Finish: All External Surfaces Corrosion Resistant and Terminal
- Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Maximum for 10 Seconds

Applications

- Power Supply Output Rectification
- Power Management
- Instrumentation

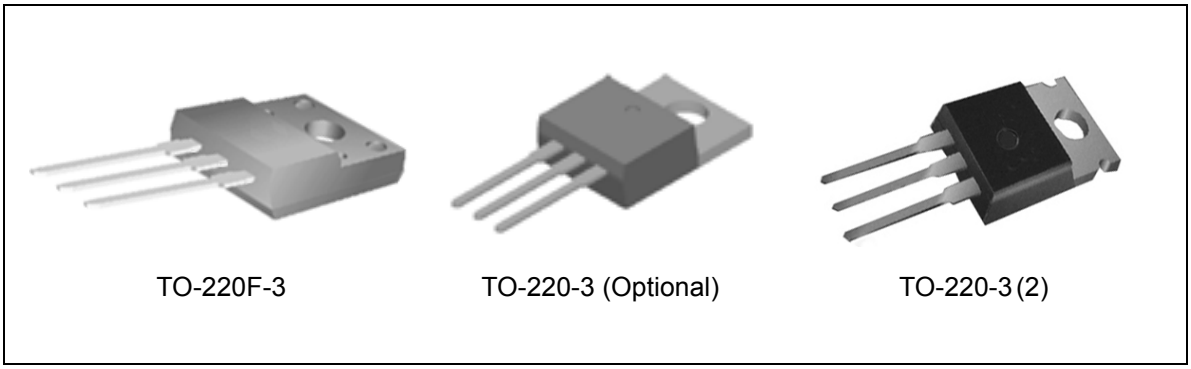

Figure 1. Package Types of MBR3045C

Pin Configuration

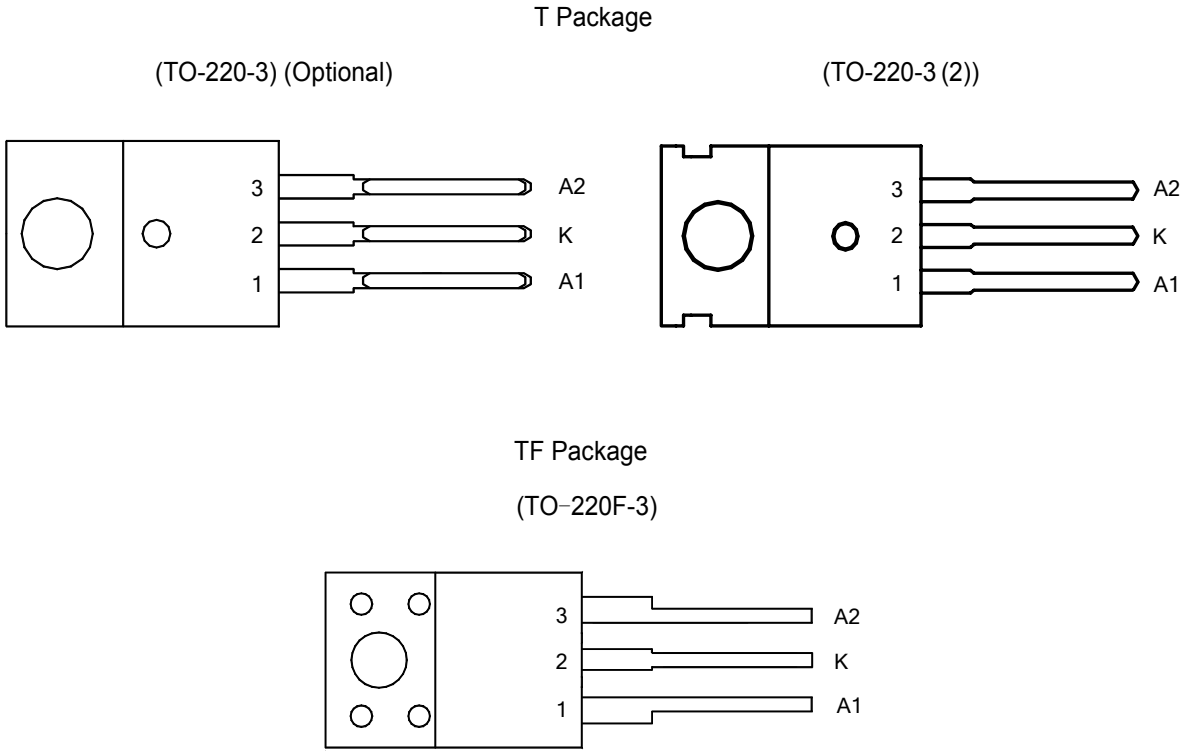

Figure 2. Pin Configuration of MBR3045C (Top View)

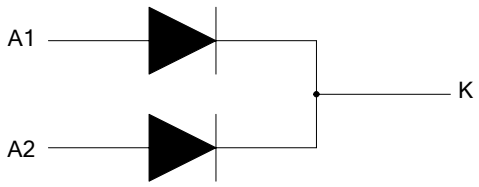

Figure 3. Internal Structure of MBR3045C

Ordering Information

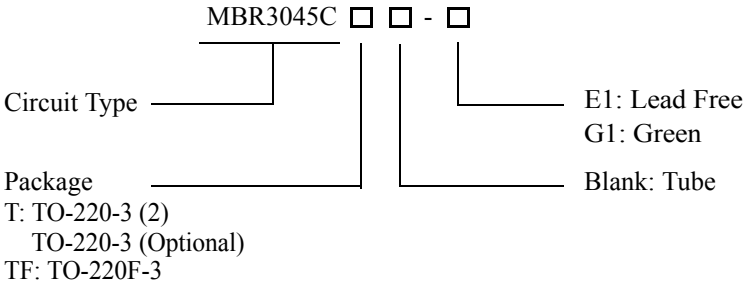

Package	Part Number		Marking ID		Packing Type
	Lead Free	Green	Lead Free	Green	
TO-220-3 (2)	MBR3045CT-E1	MBR3045CT-G1	MBR3045CT-E1	MBR3045CT-G1	Tube
TO-220F-3	MBR3045CTF-E1	MBR3045CTF-G1	MBR3045CTF-E1	MBR3045CTF-G1	Tube

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

Absolute Maximum Ratings (Each Diode Leg) (Note 1)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	V
Average Rectified Forward Current (Rated V_R) T_C=126°C	$I_{F(AV)}$	15	A
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20kHz) T_C=138°C	I_{FRM}	30	A
Non Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Half Wave, Single Phase, 60Hz)	I_{FSM}	200	A
Operating Junction Temperature (Note 2)	T_J	150	°C
Storage Temperature Range	T_{STG}	-65 to 150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/μs
ESD (Machine Model=C)		400	V
ESD (Human Body Model=3B)		8000	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: The heat generated must be less than the thermal conductivity from Junction to Ambient: $dP_D/dT_J < 1/\theta_{JA}$.

Thermal Characteristics

Parameter	Symbol	Condition		Value	Unit
Maximum Thermal Resistance	θ_{JC}	Junction to Case	TO-220-3/ TO-220-3 (2)	3.0	°C/W
			TO-220F-3	2.0	
	θ_{JA}	Junction to Ambient	TO-220-3/ TO-220-3 (2)	60	

Electrical Characteristics (Each Diode Leg)

Parameter	Symbol	Condition	Value	Unit
Maximum Instantaneous Forward Voltage Drop (Note 3)	V_F	I_F=15A, T_C=25°C	0.7	V
		I_F=15A, T_C=125°C	0.57	
		I_F=30A, T_C=25°C	0.84	
		I_F=30A, T_C=125°C	0.72	
Maximum Instantaneous Reverse Current (Note 3)	I_R	Rated DC Voltage, T_C=125°C	20	mA
		Rated DC Voltage, T_C=25°C	0.1	

Note 3: Pulse Test: Pulse Width=300μs, Duty Cycle≤2.0%.

Typical Performance Characteristics

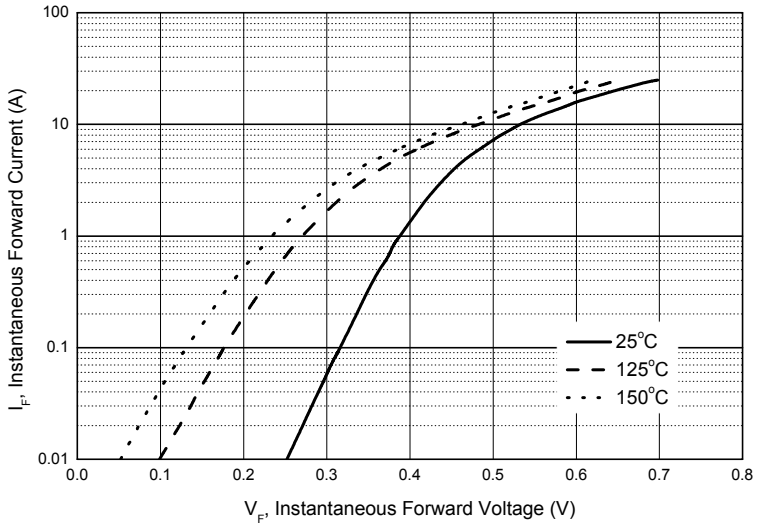

Figure 4. Typical Forward Voltage

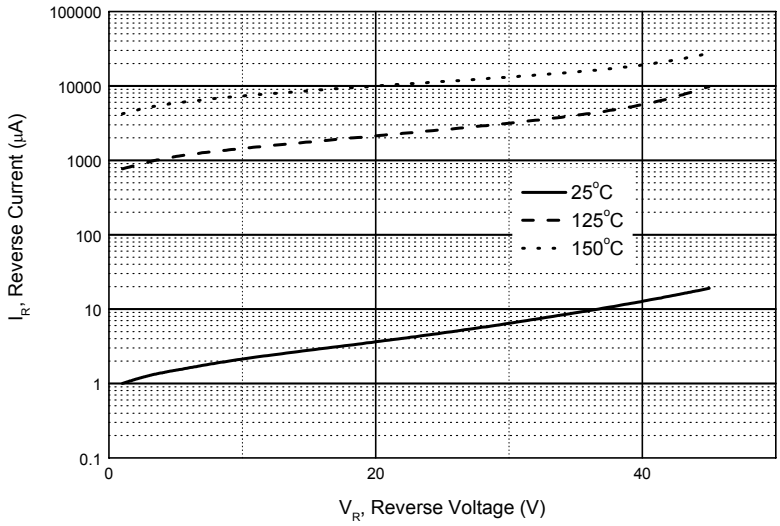

Figure 5. Typical Reverse Current

Typical Performance Characteristics (Continued)

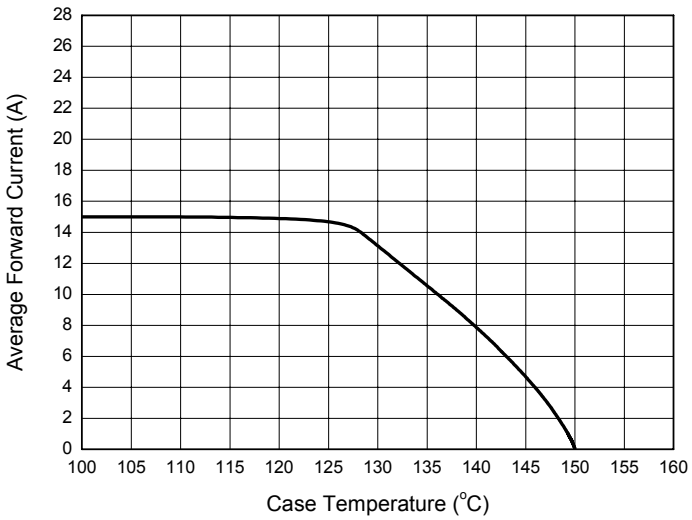

Figure 6. Average Forward Current vs. Case Temperature (Square, Each Diode)

Mechanical Dimensions

TO-220-3
(Optional)

Unit: mm(inch)

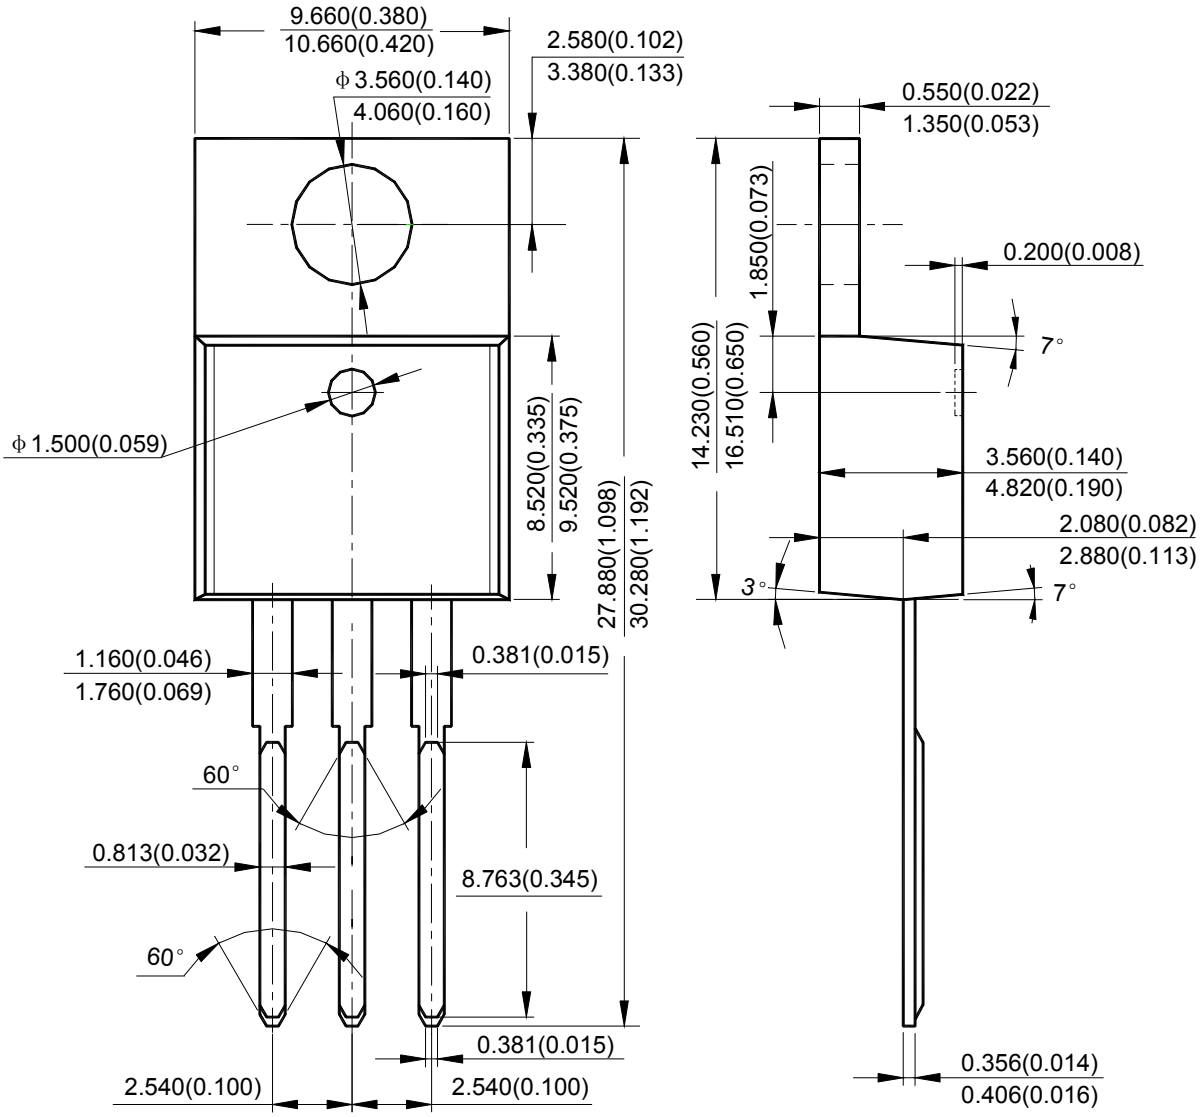

Mechanical Dimensions (Continued)

TO-220-3 (2) **Unit: mm(inch)**

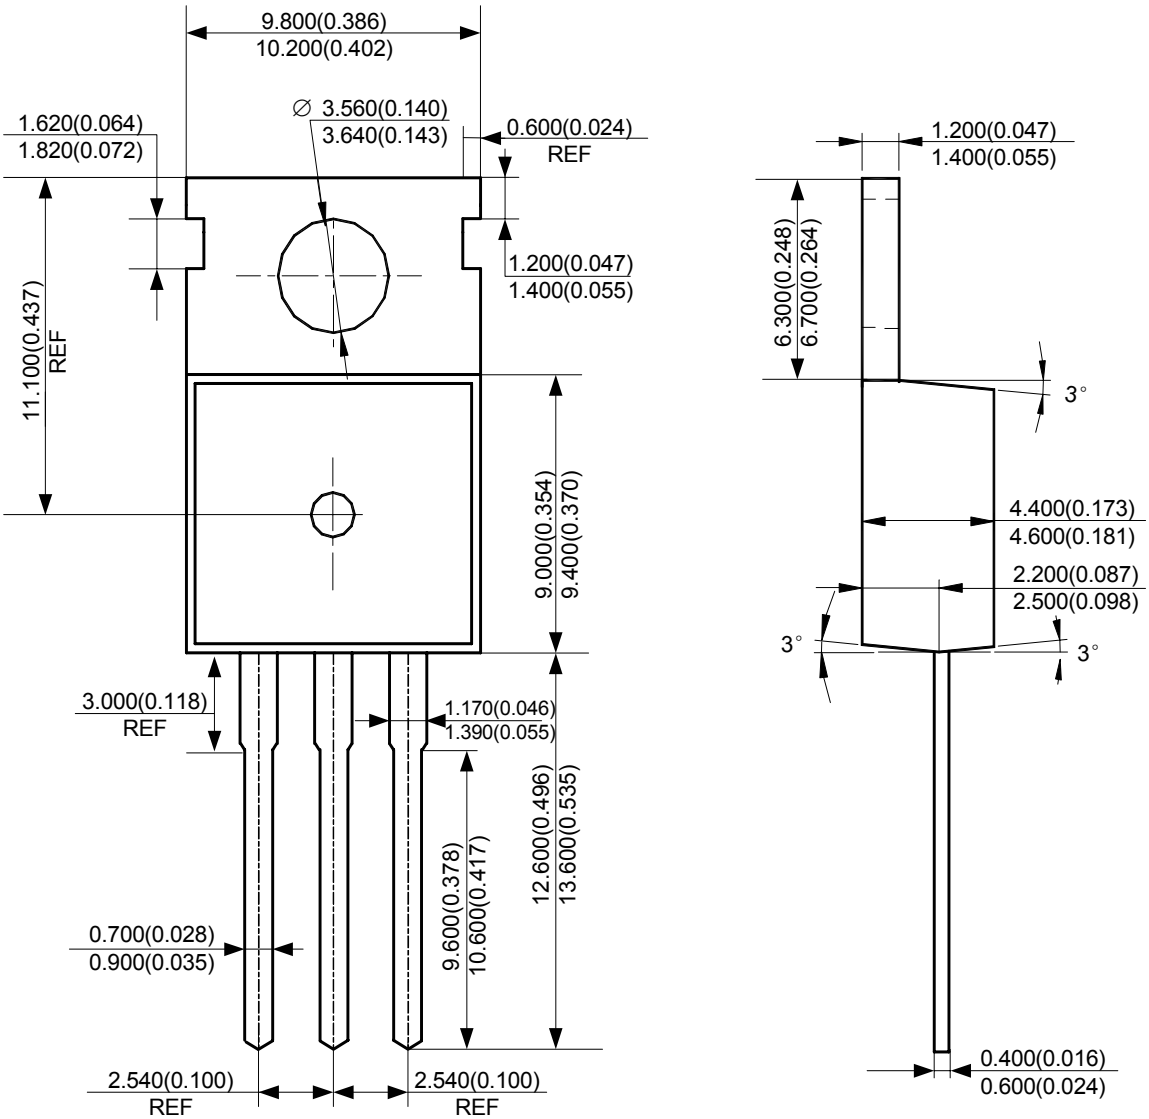

Mechanical Dimensions (Continued)

TO-220F-3 **Unit: mm(inch)**

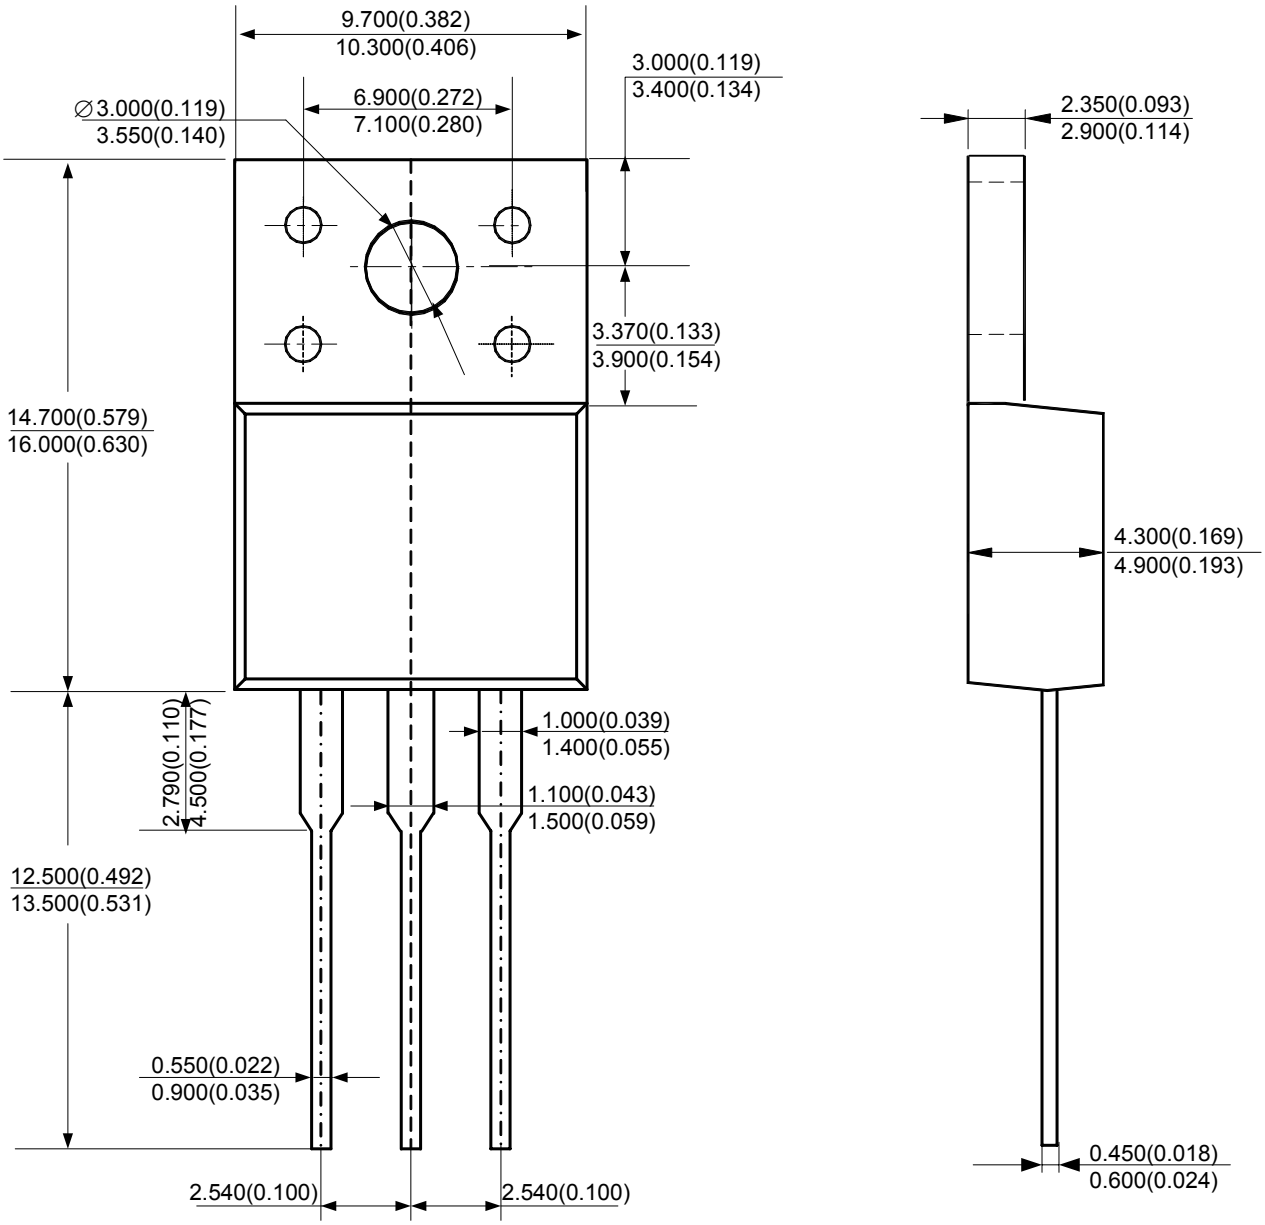

BCD Semiconductor Manufacturing Limited

http://www.bcdsemi.com

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters
BCD Semiconductor Manufacturing Limited
No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab
Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.
800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office
Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office
Unit A Room 1203, Skyworth Bldg., Gaoxin Ave.1.S., Nanshan District, Shenzhen, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office
BCD Semiconductor (Taiwan) Company Limited
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office
BCD Semiconductor Corp.
30920 Huntwood Ave. Hayward, CA 94544, USA
Tel : +1-510-324-2988
Fax: +1-510-324-2788

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331