nichicon

UTT

Miniature Sized, Low Impedance, High Reliability For Switching Power Supplies

Smaller | Low Impedance | Long Life | Anti-Solvent Feature

- Smaller case size and Long Life product.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

UPW → Long Life → UTT

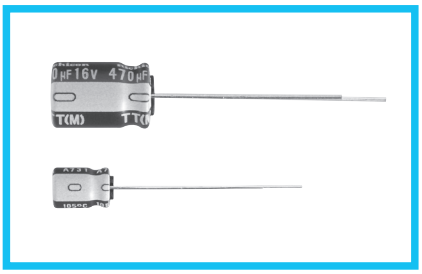

■Specifications

Item	Performance Characteristics
Category Temperature Range	−40 to +105˚C
Rated Voltage Range	6.3 to 50V
Rated Capacitance Range	1 to 470μF
Capacitance Tolerance	±20% at 120Hz, 20˚C
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.03CV or 3 (μA), whichever is greater.

Tangent of loss angle (tan δ) — Measurement frequency : 120Hz at 20°C

Rated voltage (V)	6.3	10	16	25	35	50
tan δ (MAX.)	0.30	0.28	0.24	0.18	0.16	0.14

Stability at Low Temperature — Measurement frequency : 120Hz

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (MAX.)	Z−25°C / Z+20°C	5	4	3	3	3	3
	Z−40°C / Z+20°C	10	10	8	6	4	4

Endurance — The specifications listed at right shall be met when the capacitors are restored to 20˚C after the rated voltage is applied for 5000 hours at 105˚C.

Capacitance change	Within ±30% of the initial capacitance value
tan δ	300% or less than the initial specified value
Leakage current	Less than or equal to the initial specified value

Shelf Life — After storing the capacitors under no load at 105˚C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.

Marking — Printed with white color letter on dark blown sleeve.

■Radial Lead Type

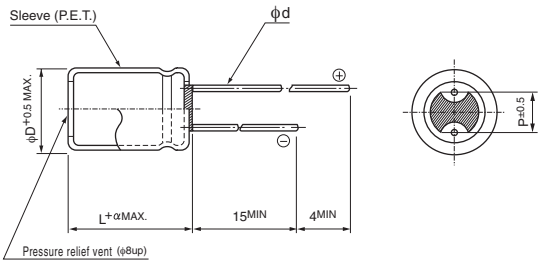

α	
	(L = 7) 1.0
	(L ≧ 9) 1.5

(mm)

φD	4	5	6.3	8
P	1.5	2.0	2.5	3.5
φd	0.45	0.45	0.5 (0.45)	0.6

( ) : Applied to 7mmL products

Type numbering system (Example : 25V 100μF)

1	2	3	4	5	6	7	8	9	10	11
U	T	T	1	E	1	0	1	M	P	D

- Configuration ※
- Capacitance tolerance (±20%)
- Rated capacitance (100μF)
- Rated voltage (25V)
- Series name
- Type

※ Configuration

φD	Pb-free leadwire Pb-free PET sleeve
4 to 6.3	DD
8	PD

• Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

●Dimension table in next page.

UTT

■Dimensions

Cap.(μF)	Code	6.3 (0J) Case size φD × L (mm)	6.3 (0J) Impedance (Ω) MAX. 20˚C / 100kHz	6.3 (0J) Rated ripple (mArms) 105˚C / 100kHz	10 (1A) Case size φD × L (mm)	10 (1A) Impedance (Ω) MAX. 20˚C / 100kHz	10 (1A) Rated ripple (mArms) 105˚C / 100kHz	16 (1C) Case size φD × L (mm)	16 (1C) Impedance (Ω) MAX. 20˚C / 100kHz	16 (1C) Rated ripple (mArms) 105˚C / 100kHz
10	100							4 × 7	7.4	46
22	220	4 × 7	7.4	46				5 × 7	4.0	74
33	330				5 × 7	4.0	74			
47	470	5 × 7	4.0	74				6.3 × 7	2.1	120
100	101	6.3 × 7	2.1	120				6.3 × 9	1.1	163
150	151				6.3 × 9	1.1	163	8 × 9	0.68	230
220	221	6.3 × 9	1.1	163	8 × 9	0.68	230	8 × 9	0.68	230
330	331	8 × 9	0.68	230				8 × 9	0.68	230
470	471	8 × 9	0.68	230				8 × 11.5	0.40	298

Cap.(μF)	Code	25 (1E) Case size φD × L (mm)	25 (1E) Impedance (Ω) MAX. 20˚C / 100kHz	25 (1E) Rated ripple (mArms) 105˚C / 100kHz	35 (1V) Case size φD × L (mm)	35 (1V) Impedance (Ω) MAX. 20˚C / 100kHz	35 (1V) Rated ripple (mArms) 105˚C / 100kHz	50 (1H) Case size φD × L (mm)	50 (1H) Impedance (Ω) MAX. 20˚C / 100kHz	50 (1H) Rated ripple (mArms) 105˚C / 100kHz
1	010							4 × 7	30	23
2.2	2R2							4 × 7	23	26
3.3	3R3							4 × 7	20	29
4.7	4R7				4 × 7	7.4	37	5 × 7	14	37
10	100				5 × 7	4.0	74	6.3 × 7	4.4	84
22	220	5 × 7	4.0	74	6.3 × 7	2.1	120	6.3 × 9	2.4	112
33	330	6.3 × 7	2.1	120	6.3 × 9	1.1	163			
47	470	6.3 × 9	1.1	163	6.3 × 9	1.1	163	8 × 9	1.4	162
100	101	8 × 9	0.68	230						
220	221	8 × 11.5	0.40	298						
330	331	8 × 11.5	0.40	298						

●Frequency coefficient of rated ripple current

Cap. (μF) \ Frequency	50Hz	120Hz	300Hz	1kHz	10kHz	100kHz or more
1 to 4.7	0.25	0.30	0.50	0.70	0.90	1.00
10 to 47	0.30	0.40	0.60	0.75	0.90	1.00
100 to 470	0.60	0.60	0.70	0.80	0.90	1.00

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург, Промышленная ул, дом № 19, литера Н, помещение 100-Н Офис 331