

Slide Potentiometer Standard Type (Super Slide™)

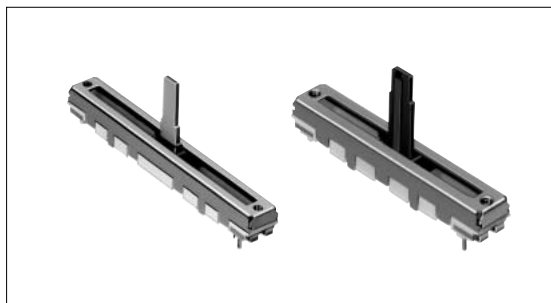
RS □ □ 1 Series



Solderable with auto dipping and available in a wide variety.

Rotary
Potentiometers

Slide
Potentiometers



Typical Specifications

Items	Specifications
Total resistance tolerance	± 20%
Maximum operating voltage	50V AC, 10V DC
Operating force	0.3 to 2.5N
Operating life	15,000cycles
Operating temperature range	- 25 to + 70

Product Line

Insulated lever

Number of resistor elements	Travel (mm)	Lever types	Length of lever(mm)	Total resistance (kΩ)	Resistance taper	Detent	Mounting plate	Minimum packing unit(pcs.)	Products No.	Drawing No.	
Single-unit	30	J-1	5	10	15A	Without	Without	1,000	RS301111J00P	1	
				50	1B		With		RS301111AJ01R	2	
			A		10		10		1B	Without	RS301111J00R
				With						RS301111J00W	2
		C	Without	RS301111AJ01K						3	
			Without	RS301111A01G						4	
	45	B	With	RS301111C01L						5	
			With	RS451111ABA02						6	
Dual-unit	30	C	5	3B	Without	With	RS30112AC00V	7			
		J-1				With	RS30112AC00J	8			

Metal lever

Number of resistor elements	Travel (mm)	Lever types	Length of lever(mm)	Total resistance (kΩ)	Resistance taper	Detent	Mounting plate	Minimum packing unit(pcs.)	Products No.	Drawing No.	
Single-unit	15	9-1	10	10	15A	Without	With	1,000	RS151111A900B	9	
	30		15	20	1B		Without		RS301111A9012	10	
		4					With		RS3011114A02	11	
		6					Without		RS301111A602N	12	
	45	9-1	10	10	15A		1B		With	RS451111A900F	13
									Without	RS4511119A04	14
	60	6	15	10	1B		With		RS6011YA600M	15	
		9-1	10				Without		RS6011Y19004	16	
		6	15				Without		RS6011Y1600Q	17	
Dual-unit	45	4	20	20	15A		With			RS451121400A	18
										RS45112A400G	19
	60	6	15	20	15A					RS60112A600N	20
										RS60112A600U	

Note

Products other than those listed in above products are also available. Please contact us for details.

Refer to **P.408** for product varieties.
Refer to **P.408** for configuration details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
1		
2		
3		
4		

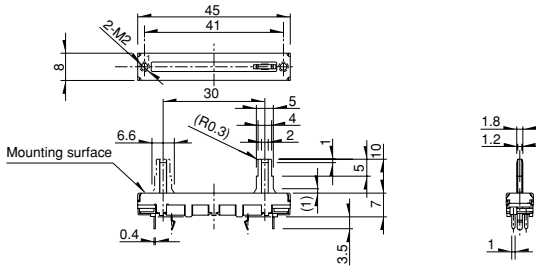

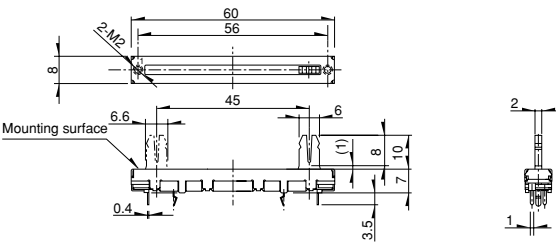
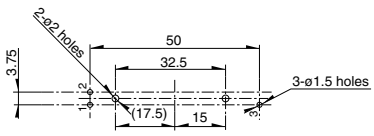
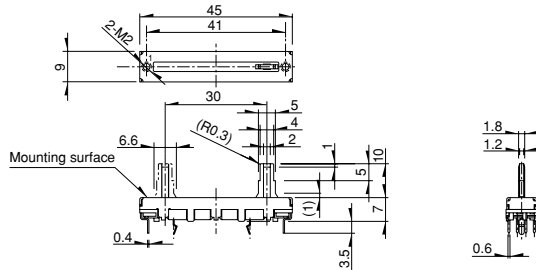

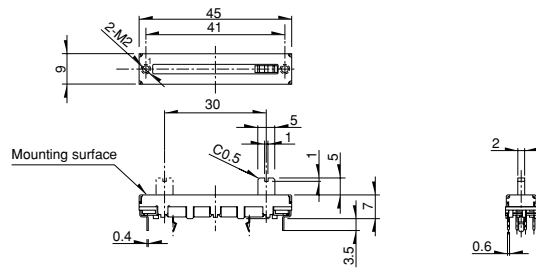

Rotary
Potentiometers
Slide
Potentiometers

General-use
Mixer

The length of the operating part(L₁)can be customized. Refer to P.408 for details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
5	 Technical drawing of potentiometer style 5. The side view shows a total length of 45mm and 41mm, with a mounting surface width of 6.6mm and a base width of 30mm. The front view shows a height of 10mm and a base width of 7mm. A detail view shows a mounting hole with a diameter of 1.8mm and a depth of 1.2mm.	 PC board mounting hole dimensions for style 5. The drawing shows a 2-φ2 holes pattern with a center-to-center distance of 35mm and a hole diameter of 2mm. The mounting surface width is 12.5mm, and the base width is 10mm. There are 3-φ1.5 holes on the base.
6	 Technical drawing of potentiometer style 6. The side view shows a total length of 60mm and 56mm, with a mounting surface width of 6.6mm and a base width of 45mm. The front view shows a height of 10mm and a base width of 7mm. A detail view shows a mounting hole with a diameter of 2mm and a depth of 1mm.	 PC board mounting hole dimensions for style 6. The drawing shows a 2-φ2 holes pattern with a center-to-center distance of 50mm and a hole diameter of 2mm. The mounting surface width is 17.5mm, and the base width is 15mm. There are 3-φ1.5 holes on the base.
7	 Technical drawing of potentiometer style 7. The side view shows a total length of 45mm and 41mm, with a mounting surface width of 6.6mm and a base width of 30mm. The front view shows a height of 10mm and a base width of 7mm. A detail view shows a mounting hole with a diameter of 1.8mm and a depth of 1.2mm.	 PC board mounting hole dimensions for style 7. The drawing shows a 2-φ2 holes pattern with a center-to-center distance of 40mm and a hole diameter of 2mm. The mounting surface width is 12.5mm, and the base width is 10mm. There are 6-φ1.1 holes on the base.
8	 Technical drawing of potentiometer style 8. The side view shows a total length of 45mm and 41mm, with a mounting surface width of 6.6mm and a base width of 30mm. The front view shows a height of 10mm and a base width of 7mm. A detail view shows a mounting hole with a diameter of 2mm and a depth of 1mm.	 PC board mounting hole dimensions for style 8. The drawing shows a 2-φ2 holes pattern with a center-to-center distance of 40mm and a hole diameter of 2mm. The mounting surface width is 12.5mm, and the base width is 10mm. There are 6-φ1.1 holes on the base.

The length of the operating part(L₁)can be customized. Refer to P.408 for details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
9		
10		
11		
12		

Rotary
Potentiometers
Slide
Potentiometers

General-use
Mixer

The length of the operating part(L₁)can be customized. Refer to P.408 for details.

Rotary
Potentiometers

Slide
Potentiometers

General-use

Mixer

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
13		
14		
15		
16		

The length of the operating part(L) can be customized. Refer to P.408 for details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
17	Technical drawing of Style 17 potentiometer. Top view shows overall dimensions 75x71, mounting holes 2-M2, and a 60mm body length. Side view shows a 9mm height. Front view shows a 6.6mm mounting tab, 4-R0.3 max. fillet, and 5mm terminal spacing. A side profile shows a 1.2mm terminal height and 0.6mm base. A detail view shows a 10mm terminal length and 7mm body width.	PC board mounting hole dimensions for Style 17. The drawing shows a 70mm body length with 6-φ1.1 holes. The mounting holes are 2.5mm diameter. The distance between the mounting holes is 70mm. The distance from the mounting holes to the terminal is 3mm. The terminal length is L. The terminal width is 3mm. The terminal height is 1.2mm. The terminal base is 0.6mm. The terminal pitch is 2mm. The terminal width is 3mm. The terminal height is 1.2mm. The terminal base is 0.6mm. The terminal pitch is 2mm.
18	Technical drawing of Style 18 potentiometer. Top view shows overall dimensions 60x56, mounting holes 2-M2, and a 45mm body length. Side view shows a 9mm height. Front view shows a 6.6mm mounting tab, 3mm terminal spacing, and 5mm terminal width. A side profile shows a 1.2mm terminal height and 0.6mm base. A detail view shows a 10mm terminal length and 20mm body width.	PC board mounting hole dimensions for Style 18. The drawing shows a 55mm body length with 6-φ1.1 holes. The mounting holes are 2.5mm diameter. The distance between the mounting holes is 55mm. The distance from the mounting holes to the terminal is 3mm. The terminal length is L. The terminal width is 3mm. The terminal height is 1.2mm. The terminal base is 0.6mm. The terminal pitch is 2mm.
19	Technical drawing of Style 19 potentiometer. Top view shows overall dimensions 60x56, mounting holes 2-M2, and a 45mm body length. Side view shows a 9mm height. Front view shows a 6.6mm mounting tab, 3mm terminal spacing, and 5mm terminal width. A side profile shows a 1.2mm terminal height and 0.6mm base. A detail view shows a 10mm terminal length and 20mm body width.	PC board mounting hole dimensions for Style 19. The drawing shows a 55mm body length with 2-φ2 holes and 6-φ1.1 holes. The mounting holes are 2.5mm diameter. The distance between the mounting holes is 55mm. The distance from the mounting holes to the terminal is 3mm. The terminal length is L. The terminal width is 3mm. The terminal height is 1.2mm. The terminal base is 0.6mm. The terminal pitch is 2mm.
20	Technical drawing of Style 20 potentiometer. Top view shows overall dimensions 75x71, mounting holes 2-M2, and a 60mm body length. Side view shows a 9mm height. Front view shows a 6.6mm mounting tab, 4-R0.3 max. fillet, and 5mm terminal spacing. A side profile shows a 1.2mm terminal height and 0.6mm base. A detail view shows a 10mm terminal length and 7mm body width.	PC board mounting hole dimensions for Style 20. The drawing shows a 70mm body length with 2-φ2 holes and 6-φ1.1 holes. The mounting holes are 2.5mm diameter. The distance between the mounting holes is 70mm. The distance from the mounting holes to the terminal is 3mm. The terminal length is L. The terminal width is 3mm. The terminal height is 1.2mm. The terminal base is 0.6mm. The terminal pitch is 2mm.

Rotary
Potentiometers
Slide
Potentiometers

General-use
Mixer

The length of the operating part(L;)can be customized. Refer to P.408 for details.

Product Varieties

In addition to the recommended products, the following specifications can also be accommodated.

Travel Distance Variety

Travel(mm)	15	20	30	45	60
--------------	----	----	----	----	----

Total Resistance Variety

Total resistance(k Ω)	10	20	50	100	200
--------------------------------	----	----	----	-----	-----

Resistance Taper







Resistance taper	1B	4B	10A	15A
------------------	----	----	-----	-----

Note

DC(10VDC) is also available.(Tapped types are not available)


Lever Types

Unit:mm




Metal lever		Insulated lever	
Code	Dimensions	Code	Dimensions
9-2	 t=1.2 L₁ 5	J-1	 t=2 L₁ 5
	9-1		 t=1.2 L₁ 10
6	 t=1.2 L₁ 15 20	C	 t=2 L₁ 10 15
4	 t=1.2 L₁ 15 20		

Corresponding Specifications

Unit:mm

Resistance taper	3B, 15C	Insulated lever configuration
Dust cover	Available	B  t=1.2 L₁ 10 15
Tap	Available (Only the center-positioned)	

Terminal Layout/Circuit Diagram

Single-unit 	Dual-unit (with lug terminal X RS6011Y only)  L : Lug terminal	Dual-unit 
--	---	--

Note

marked are specifications recommended by ALPS.

Refer to P.408, 502 for resistance taper.

Orders Other Than Recommended Products

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

Sample Part Number



Specify the travel distance from the below codes.

Travel (mm)	Code	Travel (mm)	Code
15	15	45	45
20	20	60	60
30	30		

Number of resistor elements

Single	1 (Enter "Y" for 60 mm travel)
Dual	2

Lever type/Length of operation unit (mm)

Insulated lever

Code	Configuration	Length
J1	J-1	5
0A	A	10
		15
0C	C	10
		15
0B	B	10
		15

Metal lever

Code	Configuration	Length
91	9-1	10
92	9-2	5
		15
04	4	20
		15
06	6	20

Length of operation unit

If the length is less than 10 mm, add a "0" before the number.
(e.g., 5 mm length="05")

Detent

Code	Detent
C0	Without
C1	Center

Mounting plate

Code	Mounting plate
P0	Without
P1	With

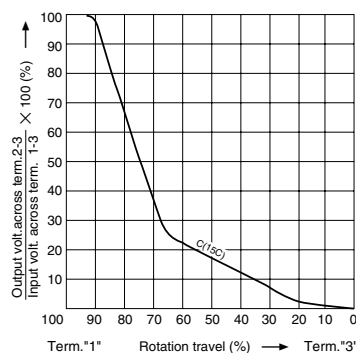
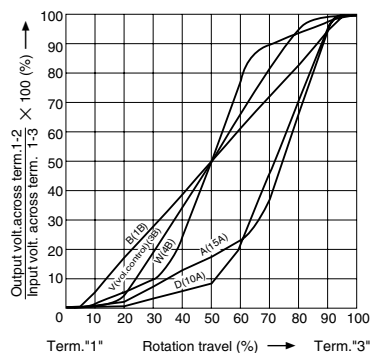
Total resistance

Code	Total resistance (kΩ)	Code	Total resistance (kΩ)
103	10	104	100
203	20	204	200
503	50		

Resistance taper

Code	Resistance taper
A	15A
B	1B
D	10A
W	4B
V	3B
C	15C

B: For tone & general
V: For vol.



Note

marked are specifications recommended by ALPS.

Rotary
Potentiometers
Slide
Potentiometers

General-use
Mixer

List of Varieties

Type		Super Slide™		Slim Slide™ (Slim4)				Slim Slide™ (Low-Profile)	
		RS □ □ 11 □		RS □ □ H1 □				RS □ □ M11	
photo									
Travel(mm)		15(RS15111) 20(RS20111) 30(RS30111) 45(RS45111) 60(RS6011Y)	20(RS20112) 30(RS30112) 45(RS45112) 60(RS60112)	15(RS15H111) 15(RS15H113) 20(RS20H111) 20(RS20H113) 30(RS30H111)	15(RS15H121) 20(RS20H123) 30(RS30H121)	15(RS15H11A) 20(RS20H11A) 20(RS20H11C) 30(RS30H11A)	15(RS15H12A) 20(RS20H12A) 30(RS30H12A)	15(RS15M111) 20(RS20M111) 20(RS20M113)	15(RS15M11A) 20(RS20M11A)
Number of resistor elements		Single-unit	Dual-unit	Single-unit	Dual-unit	Single-unit	Dual-unit	Single-unit	
Direction of lever		Vertical				Horizontal		Vertical	Horizontal
Electrical Performance	Total resistance(kΩ)	10, 20, 50, 100, 200		5, 10, 20, 50, 100 200, 250					
	Resistance taper	15A, 1B, 4B, 10A, 3B, 15C		15A, 1B, 3B					
Mechanical Performance	Operating force	0.3 to 2.5N		0.2 to 1.1N				0.15 to 0.8N	
	Stopper strength	50N		30N					
	Lever push-pull strength			30N				20N	
	Lever wobble(mm) Both sides	$\frac{2(2 \times L)}{20}$		1.6 max.					
	Detent slip-out force	Operating force+(0.2 to 2N)		Operating force+(0.05 to 0.8N)				With detent feeling	
	Lever deviation(mm) One side	0.5 max.							
Solder heat resistance	Manual soldering	350 max. 3s max.							
	Dip soldering	260 max. 5s max.							
Environmental Performance	Cold	- 30 ± 2 for 96h							
	Dry heat	70 ± 2 for 96h						70 ± 2 for 240h	
	Damp heat	40 ± 2 , 90 to 95%RH for 96h							
Page		402		410				416	

Rotary Potentiometers

Slide Potentiometers

General-use

Mixer

- Slide Potentiometers Cautions420, 421

Notes

- "L" in the "Lever Wobble" column of the above table indicates the length of lever.
- Products other than those listed in the above list are also available. Please contact us for details.
- The resistance taper specification in () are individually defined.
- 「RS□□」 □□ indicates travel.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331