


P25 with DC coil



P25 with AC coil

# P25 series

## Definite Purpose Magnetic Contactor 25 Ampere Full Load 30 Ampere Resistive AC & DC Coils

File E22575

File LR15734

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Coil Data

| Nominal VDC | Resistance (Ohms $\pm$ 10% @ 25°C) | Must Operate* Volts | Maximum Operating Volts | Nominal Coil Current (ma) @ Nominal Voltage |
|-------------|------------------------------------|---------------------|-------------------------|---------------------------------------------|
| 12          | 34                                 | 9                   | 15                      | 353                                         |
| 24          | 133                                | 18                  | 30                      | 180                                         |

| AC Voltage Rating | Nominal |         | Must Operate |        |
|-------------------|---------|---------|--------------|--------|
|                   | 60 Hz.  | 50 Hz.  | 60 Hz.       | 50 Hz. |
| 24                | 24      | 24      | 20.4         | 20.4   |
| 120               | 120     | 110     | 102          | 94     |
| 240               | 208/240 | 208/220 | 177          | 177    |

Consult factory for other voltages.

\*Must operate is 75% of nominal voltage for any mounting position, applicable for vertical or horizontal mounting, but not for upside-down mounting.

\*\*Units requiring less power can be provided for some applications.

Consult factory for details.

**Note:** Coil suppression is recommended for all DC coil units, particularly 120 and 240VDC coils.

### Features

- AC and DC coils.
- For controlling motors, power supplies, heating elements and lighting.
- Dust cover available.
- Auxiliary switch available.

### Contact Data @ 25°C

**Arrangements:** Up to 3 Form X (3PST-NO-DM).

**Ratings:** See contact rating table.

**Material:** Silver-cadmium oxide.

**Expected Life:** 200,000 operations at full load.

**AC coil:** 2 million operations, mechanical.

**DC coil:** 5 million operations, mechanical.

**Minimum Contact Load:** 3A @ 120VAC.

### Main Contact Ratings @ +25°C, 60 Hz.

| Type | Motor Rating in Amps, 3Ø3P or 1Ø2P |                     |        |        | Resistive Rating (Electric Heat) @ 600V |
|------|------------------------------------|---------------------|--------|--------|-----------------------------------------|
|      | Full Load @ 600V                   | Locked Rotor @ 240V | @ 480V | @ 600V |                                         |
| P25  | 25A                                | 150A                | 125A   | 100A   | 30A                                     |

| Motor Rating in Horsepower |        |        |            |
|----------------------------|--------|--------|------------|
| Type                       | @ 120V | @ 240V | @ 440-600V |
| 1Ø2P                       | 1.5HP  | 3HP    | —          |
| 3Ø3P                       | 3HP    | 7.5HP  | 10HP       |

**Notes:** Models utilizing box lug terminals are restricted to the following ratings: 25 FLA, 150 LRA @ 250VAC; 30A @ 277VAC Resistive; Horsepower ratings shown in the table are valid up to 240VAC.

**Tungsten Lamp Rating:** 30A, 277VAC.

**Electric Discharge Lamp Rating:** 30A, 277VAC.

**Heavy Duty Pilot Ratings @ 120V through 600V:** 720VA max. (Box lug nut units limited to 277VAC.)

### Auxiliary Snap-Action Switch

**Arrangements:** Up to 2 Form C (DPDT).

**Rating:** 10 amps at 120VAC, 60 Hz. @ 25°C.

**Material:** Silver.

### Initial Dielectric Strength

**Initial Breakdown Voltage:** 2,200V rms. minimum between all elements and between all elements and ground.

### Coil Data @ 25°C

**Voltage:** From 6 to 240VDC and 24 to 600VAC, 50/60 Hz.

**Power:** DC, 4-8W; AC, 40VA inrush; 10VA, sealed.

**Duty Cycle:** Continuous.

**Insulation Class:** Class A, standard. Class B available.

**Initial Insulation Resistance:** 100 megohms, minimum.

### Operate Data @ 25°C

**Must-Operate Voltage:** See coil data tables.

### Environmental Data

**Temperature Range: AC:** —55°C to +65°C

**DC:** —55°C to +55°C

Contact sales representative for higher temperature ratings.

### Mechanical Data

**Mounting:** No. 10 screws on 2.125" (53.98mm) centers or universal mounting bracket.

#### Termination:

**Contacts:** 8-32 screw for No. 16 to No. 8 wire, dual .250" (6.35mm) quick connect, box lug or captive pressure plate.

**Coil:** Combination 8-32 screw and .250" (6.35mm) or .187" (4.75mm) quick connect, combination captive pressure plate and .250" (6.35mm) quick connect, or .250" (6.35mm) quick connect.

**Aux. Switch:** .187" (4.75mm) quick connect.

**Weight:** 14 oz. (397g).

## Ordering Information


| Typical Part No. ►                                                                                                                                                                  | P25 | P | 42 | A | 1 | 4 | P | 1 | -240 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---|----|---|---|---|---|---|------|
| <b>1. Type:</b><br>P25 Definite Purpose Contactor                                                                                                                                   |     |   |    |   |   |   |   |   |      |
| <b>2. Auxiliary Switch:</b><br>P = No Aux Switch<br>C = 1 Form C (SPDT), silver contacts<br>F = 2 Form C (DPDT), silver contacts<br>Double pole contact forms require two switches. |     |   |    |   |   |   |   |   |      |
| <b>3. Main Contact Arrangement:</b><br>42 = 3 Form X (3PST-NO-DM)<br>43 = 2 Form X (DPST-NO-DM) & 1 Form Y (SPST-NC-DB)<br>Other contact arrangements are available.                |     |   |    |   |   |   |   |   |      |
| <b>4. Coil Control Input:</b><br>A = Alternating Current, 50/60 Hz.      D = Direct Current                                                                                         |     |   |    |   |   |   |   |   |      |
| <b>5. Mounting and Installed Accessories:</b><br>1 = Without Mounting Plate*<br>2 = With Mounting Plate<br>* Order separately any mounting hardware which is to be bulk packed.     |     |   |    |   |   |   |   |   |      |
| <b>6. Main Contact Terminals:</b><br>2 = 8-32 Screw Terminals<br>3 = Dual .250" (6.35mm) Quick Connect<br>5 = 8-32 Screw with Captive Pressure Plate                                |     |   |    |   |   |   |   |   |      |
| <b>7. Auxiliary Contact Terminals:</b><br>P = No Auxiliary Switch<br>C = .187" (4.75mm) Quick Connect                                                                               |     |   |    |   |   |   |   |   |      |
| <b>8. Coil Terminals:</b><br>1 = Combination 8-32 Screw Terminal and .250" (6.35mm) Quick Connect<br>6-32 Screw Terminal available on DC Coils only.                                |     |   |    |   |   |   |   |   |      |
| <b>9. Coil Voltage:</b><br>24, 120 or 240VAC<br>12 or 24VDC<br>See Coil Data table.                                                                                                 |     |   |    |   |   |   |   |   |      |

**Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.**


P25P42A12P1-120  
 P25P42A12P1-240  
 P25P42A22P1-120  
 P25P42A22P1-240  
 P25P42D22P1-12  
 P25P42D22P1-24

## Outline Dimensions




### P25 With AC Coil

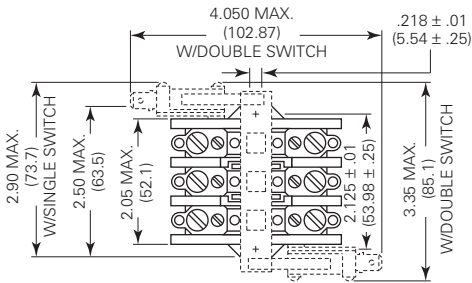


### P25 With DC Coil

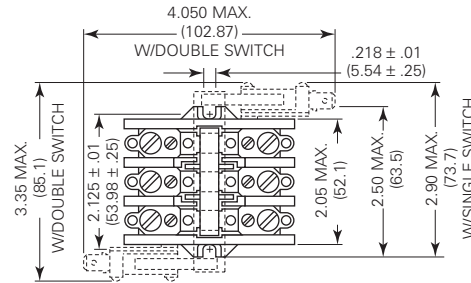

### Mounting Plate Footprint

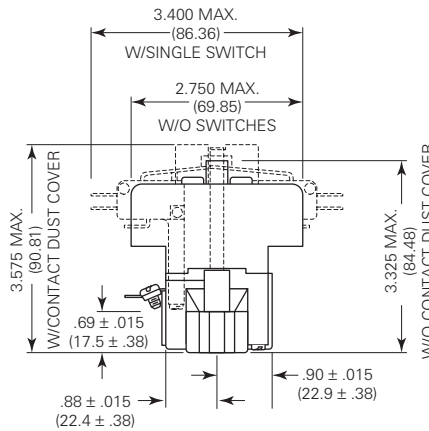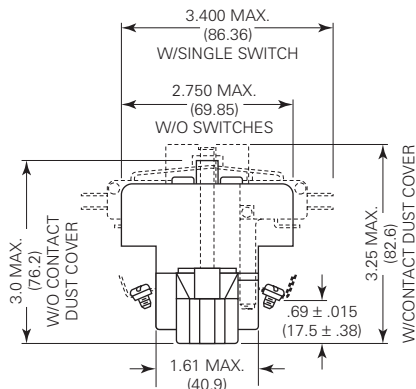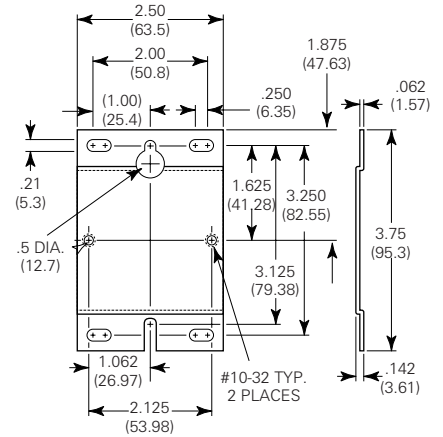

## Contact Terminal Options

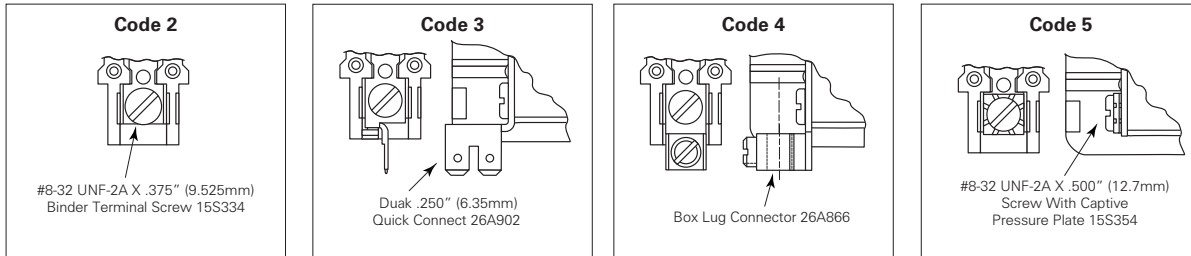

## Replacement Parts and Accessories

### Contact Replacement Kit - 9P25X1

Contact replacement kit includes 3 contact pressure springs, 3 movable contact assemblies and 6 stationary contact assemblies. Contact replacement kits are for use only on those models with form X contact arrangements.

### Mounting Plate Kit - 9P25X2

Mounting plate kit includes one mounting plate (37B918) and two mounting screws (15J011).

### Auxiliary Switch Kit for P25 AC Coil Units - 9P25X3

This auxiliary switch kit includes one plastic actuator and one auxiliary switch assembly. It contains no screw. One assembly screw must be removed from the P25 contactor and used to mount the auxiliary switch.

### Auxiliary Switch Kit for P25 DC Coil Units - 9P25X4

This auxiliary switch kit includes one plastic actuator, one auxiliary switch assembly and one thread cutting screw.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331