

TEC Series

Wakefield-Vette's **Peltier, thermoelectric coolers** can meet the requirement of higher current and large cooling. It is often applied to experimental, scientific and biomedical instruments, laboratory equipment, industry and electrical equipment and consumables. The ambient temperature can arrive 100C, long-term working temperature is recommended to be below 90C.



Features:

- All products are RoHS and REACH compliant, SGS ISO9001 verified
- Thermoelectric module material are UL certification
- Standard Wire is 150mm
- Thermoelectric module moisture protection standard is sealed by white RTV silicone, but also support select other moisture protection style, Such as translucent silicone, black epoxy.
- Thermoelectric module flatness tolerance support select 0.2mm, 0.13mm, 0.1mm.

WKV Part Number	Description	Current max (A)	Q max (W) @ 27°C	V max (V) @ 27°C	ΔT max (°C) @ 27°C	# of Couples	Outline (L/W/)	Height (mm)
TEC-30-40-127	PELTIER TEC 30X30 4MM 2.5A	2.5	21.4	15.4	68	127	30x30	4
TEC-30-32-127	PELTIER TEC 30X30 3.2MM 3.9A	3.9	33.4	15.4	68	127	30x30	3.2
TEC-40-39-127	PELTIER TEC 40X40 4.7MM 3.9A	3.9	33.4	15.4	68	127	40x40	3.9
TEC-40-33-127	PELTIER TEC 40X40 3.3MM 8.5A	8.5	72	15.4	68	127	40x40	3.3
TEC-30-36-127	PELTIER TEC 30X30 3.6MM 3.0A	3.0	25.7	15.4	68	127	30x30	3.6
TEC-30-39-71	PELTIER TEC 30X30 4.7MM 3.9A	3.9	18.7	8.6	68	71	30x30	3.9
TEC-30-36-71	PELTIER TEC 30X30 3.8MM 6.0A	6.0	28.7	8.6	68	71	30x30	3.6
TEC-40-36-127	PELTIER TEC 40X40 3.8MM 6.0A	6.0	51.4	15.4	68	127	40x40	3.6
TEC-20-33-31	PELTIER TEC 20X20 3.3MM 8.5A	8.5	16.8	3.75	68	31	20x20	3.3
TEC-30-33-71	PELTIER TEC 30X30 3.3MM 8.5A	8.5	72	15.4	68	71	30x30	3.3

Thermoelectric Cooler Performance Specifications




TEC-40-39-127

Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	33.4	39
Delta Tmax(°C)	68	75
I _{max} (Amps)	4.0	4.0
V _{max} (Volts)	15.4	16.4
Module Resistance(Ohms)	3.22	3.63




****Tolerances for thermal and electrical parameters ± 10%.**




Performance Curves Th=25 °C

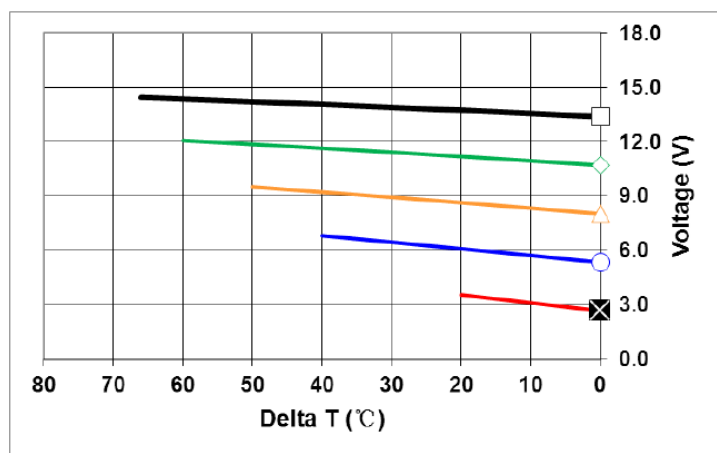

Performance Curves Th=50 °C

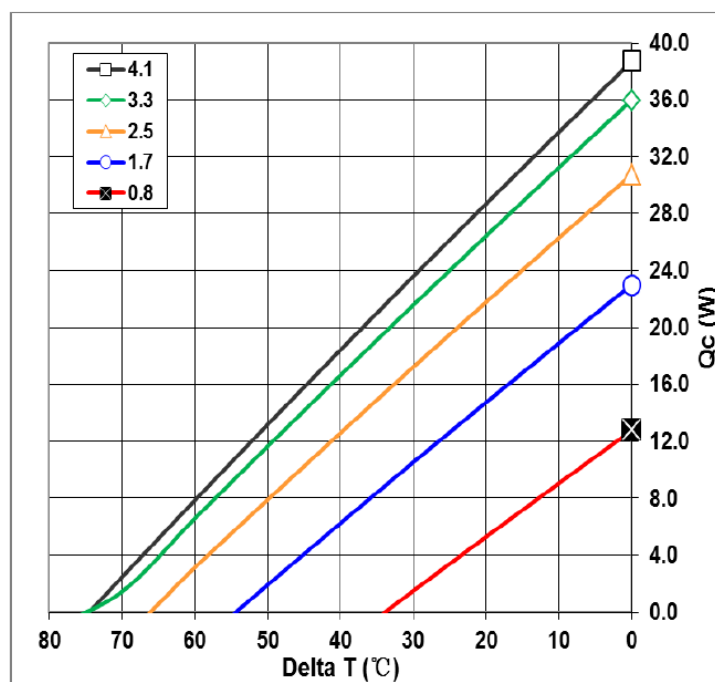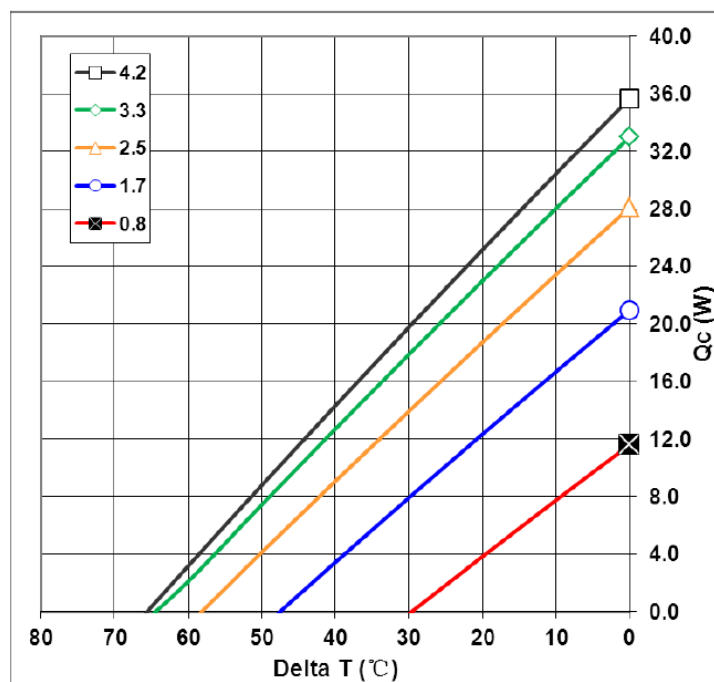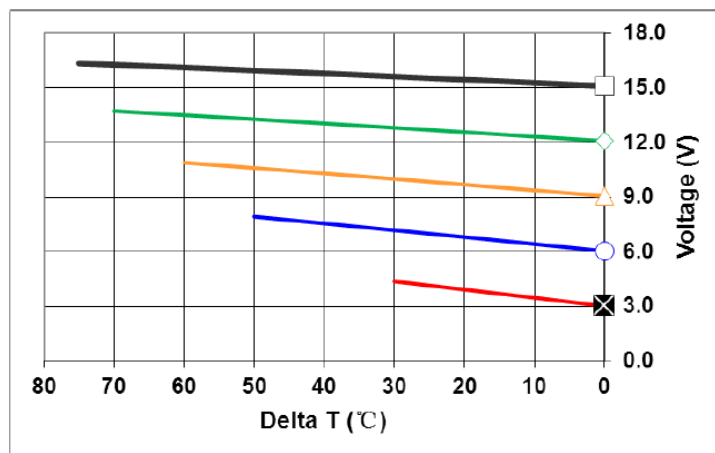

Mechanical Drawing:

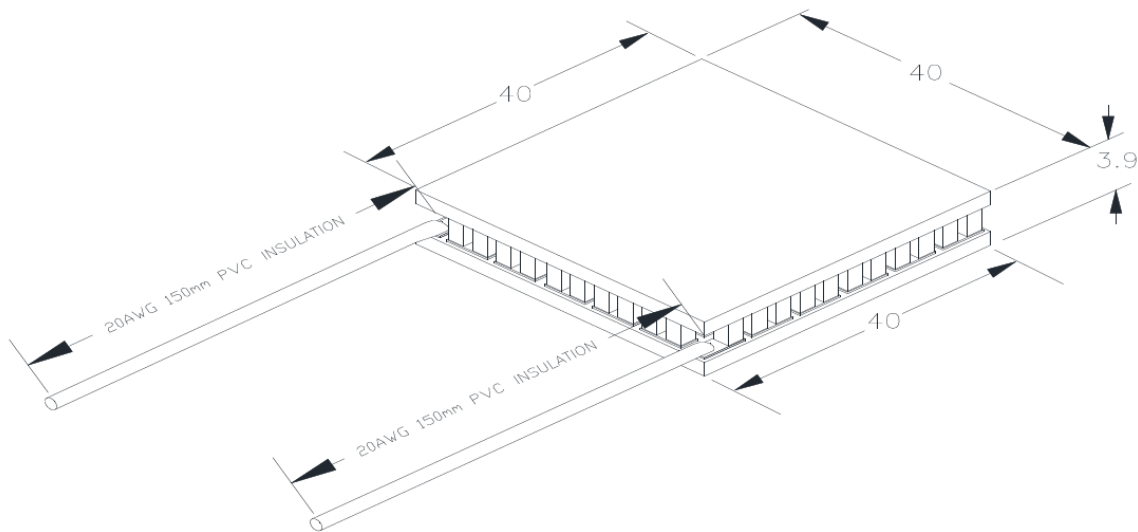

Operation Tips:

- Maximum Operating Temperature: 90°C
- Do not exceed I_{max} or V_{max} when operating module
- Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries


Thermoelectric Cooler Performance Specifications




TEC-30-32-127

Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	33.4	36.6
Delta Tmax(°C)	68	75
Imax (Amps)	4.0	4.0
Vmax (Volts)	15.4	16.4
ModuleResistance(Ohms)	3.38	3.8




**Tolerances for thermal and electrical parameters $\pm 10\%$.

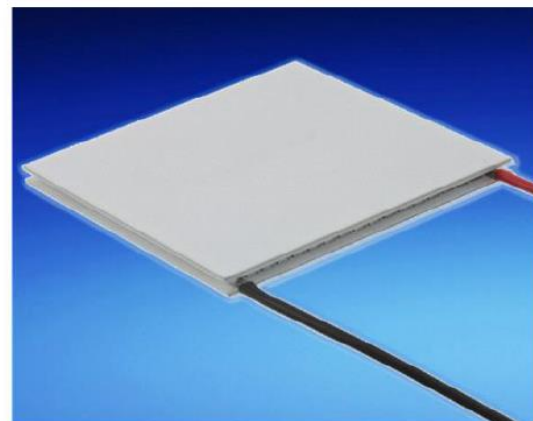

Performance Curves Th=25 °C

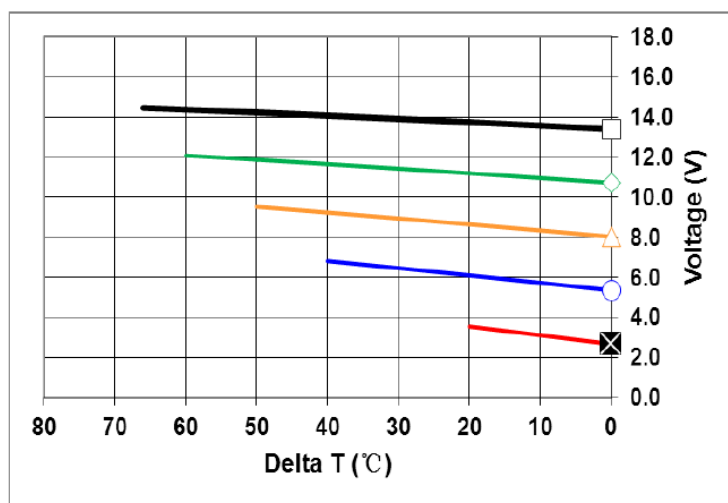


Performance Curves Th=50 °C

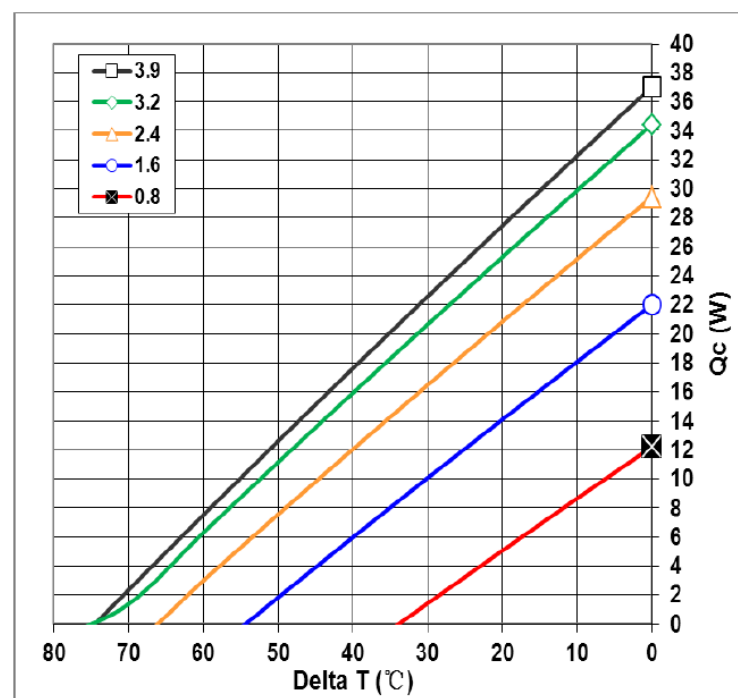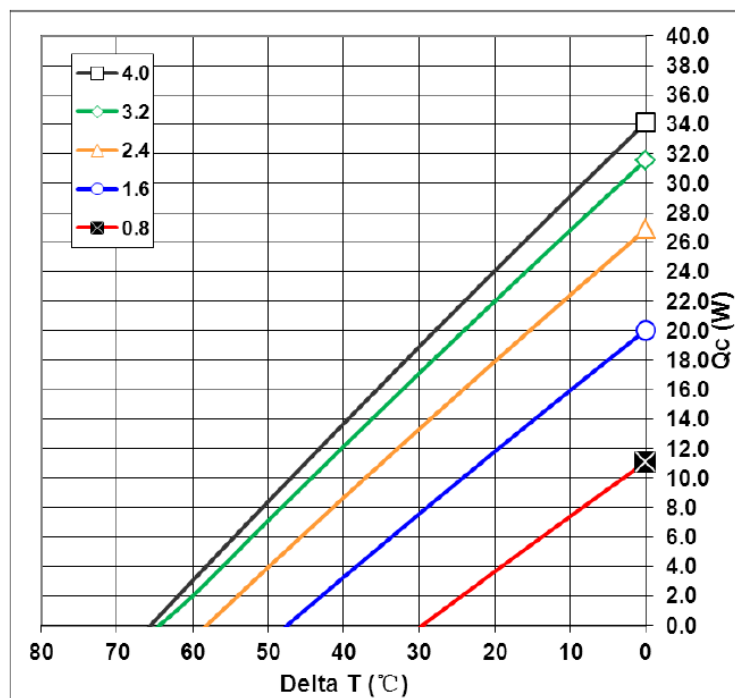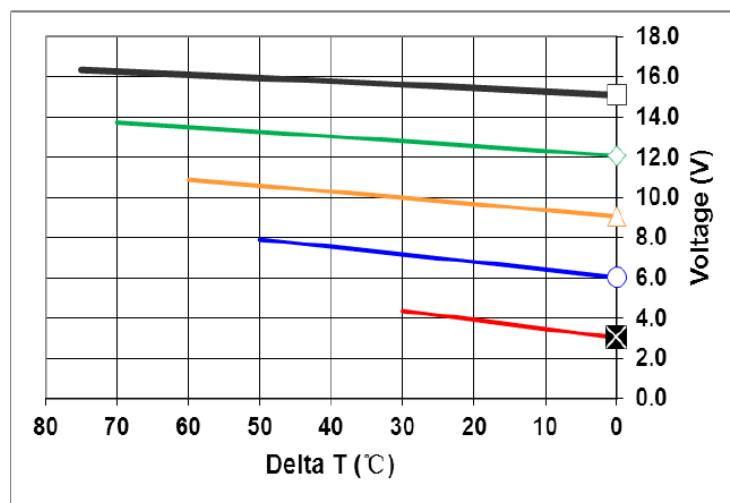

Wakefield-Vette reserves the right to change these specifications without notice

Mechanical Drawing:

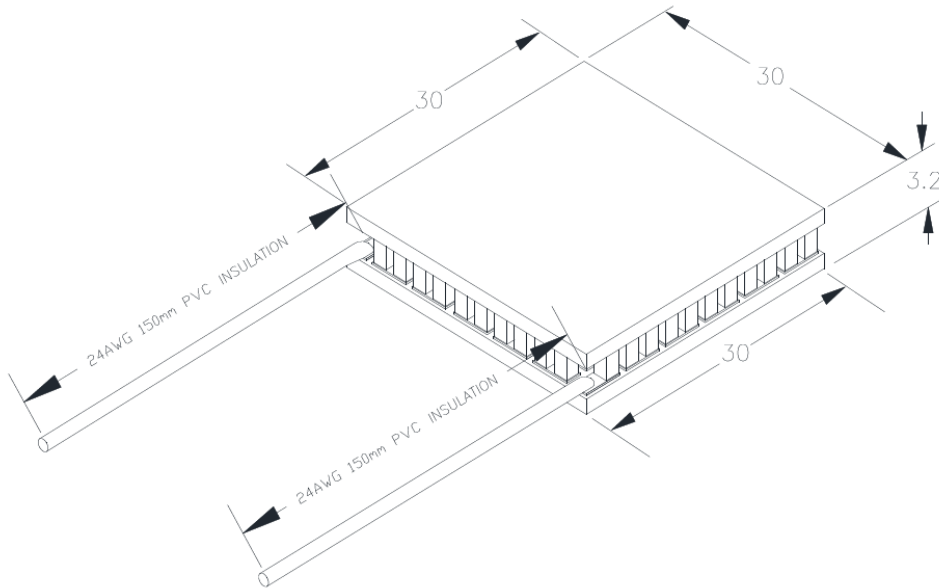

Operation Tips:

- **Maximum Operating Temperature: 90°C**
- **Do not exceed I_{max} or V_{max} when operating module**
- **Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries**


Thermoelectric Cooler Performance Specifications




TEC-30-40-127

Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	21.4	23.6
Delta Tmax(°C)	68	75
I _{max} (Amps)	2.5	2.5
V _{max} (Volts)	15.4	16.4
Module Resistance(Ohms)	5.30	6.07




**Tolerances for thermal and electrical parameters $\pm 10\%$.

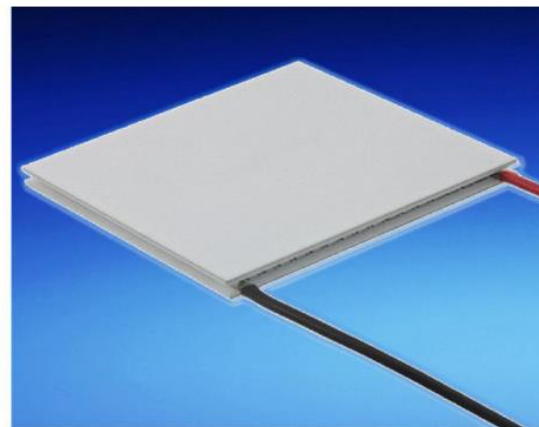


Performance Curves Th=25 °C

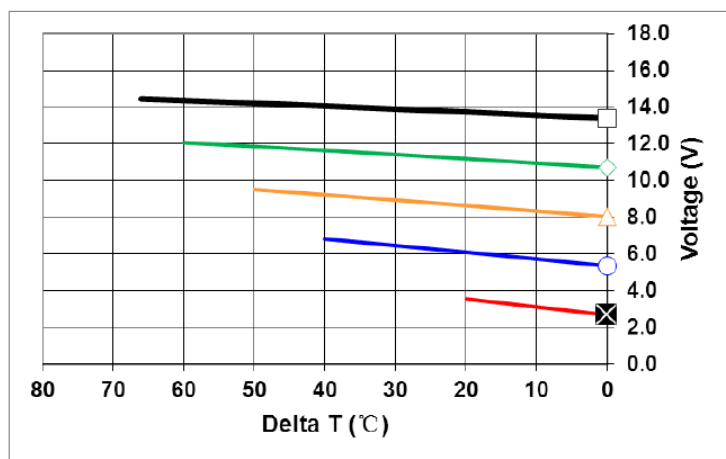

Performance Curves Th=50 °C

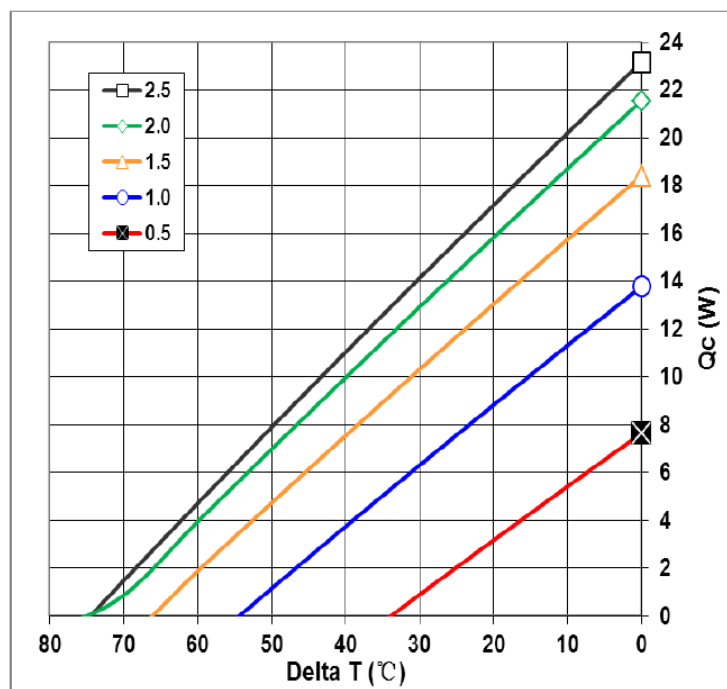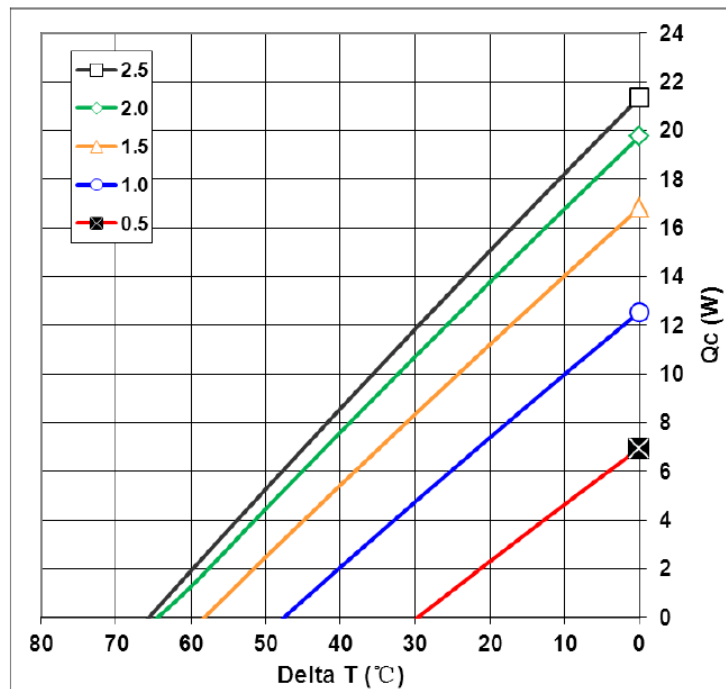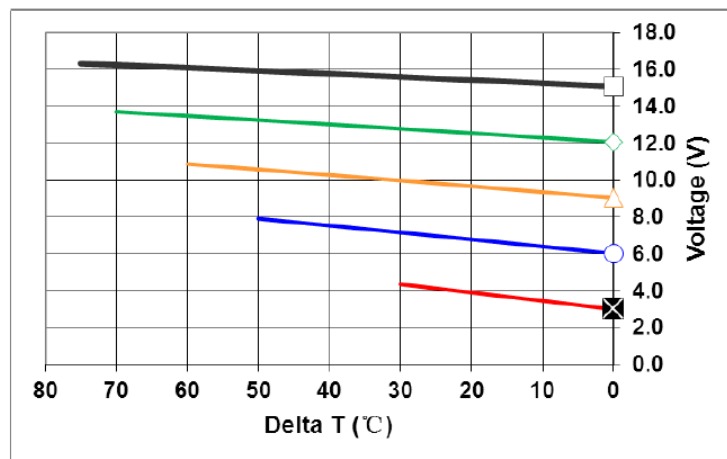

Mechanical Drawing:

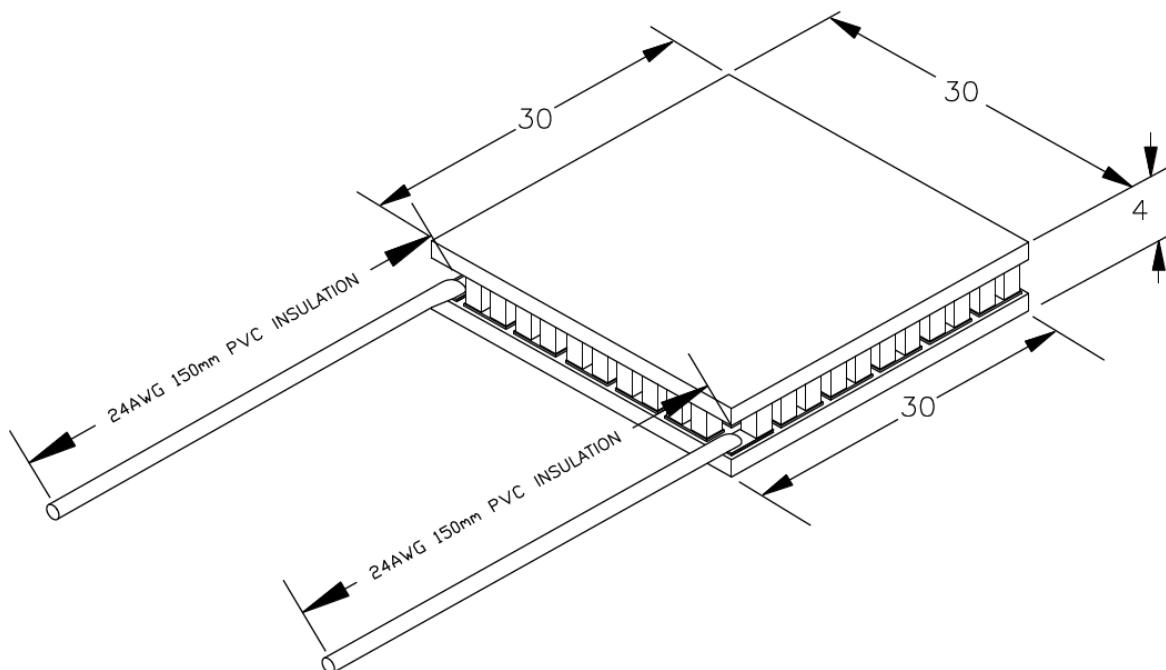

Operation Tips:

- Maximum Operating Temperature: 90°C
- Do not exceed I_{max} or V_{max} when operating module
- Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries


Thermoelectric Cooler Performance Specifications




TEC-40-33-127

Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	72	82
Delta Tmax(°C)	68	75
I _{max} (Amps)	8.5	8.5
V _{max} (Volts)	15.4	16.4
Module Resistance(Ohms)	1.66	1.74




**Tolerances for thermal and electrical parameters $\pm 10\%$.

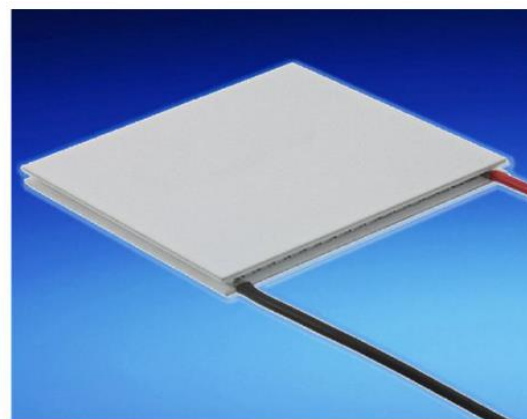


Performance Curves Th=25 °C

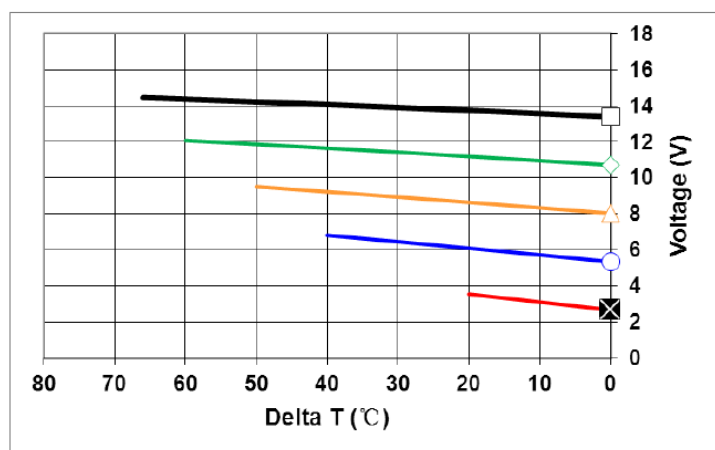

Performance Curves Th=50 °C

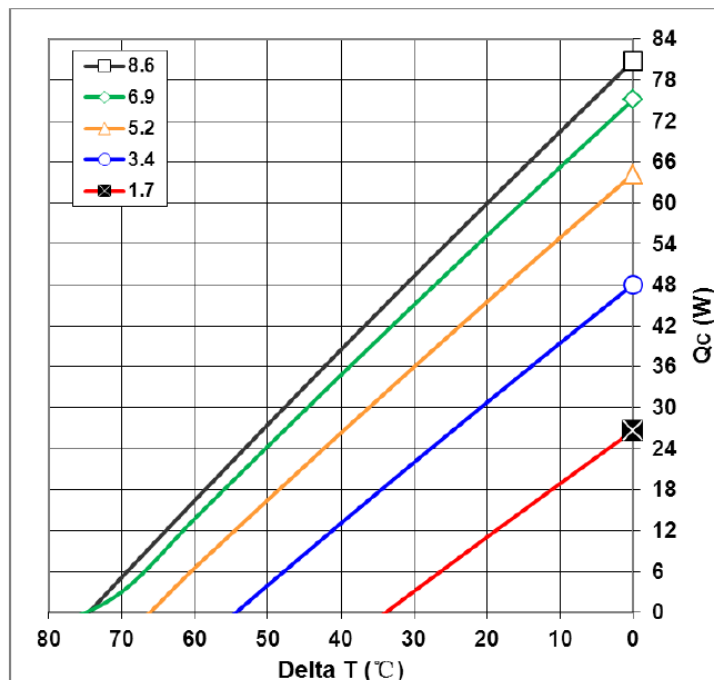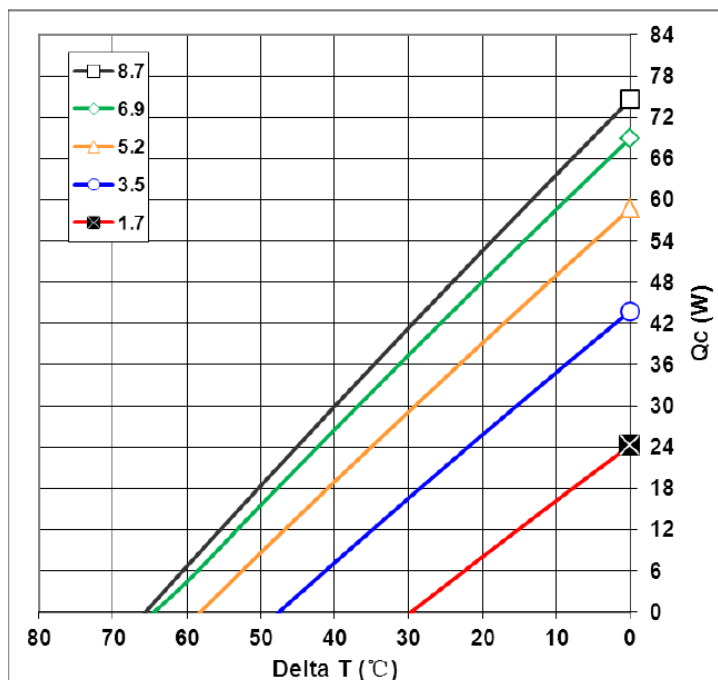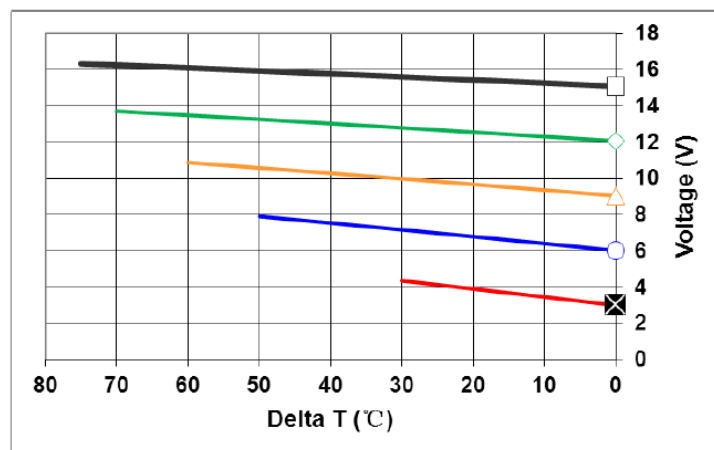

Mechanical Drawing:

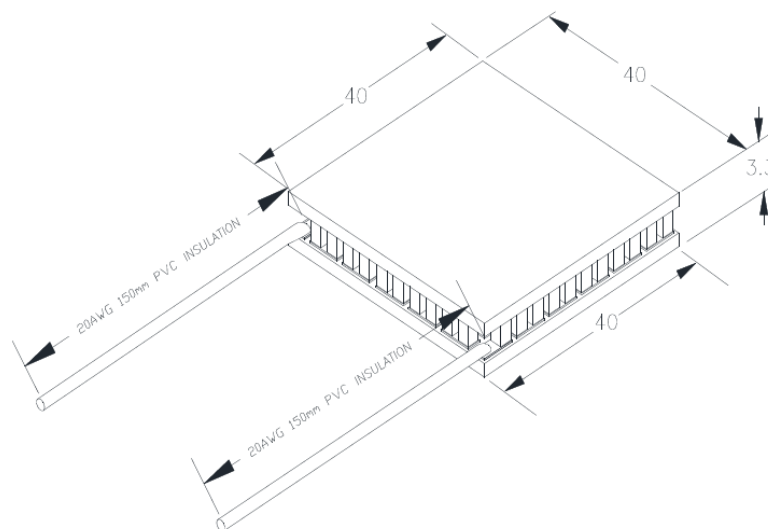

Operation Tips:

- **Maximum Operating Temperature: 90°C**
- **Do not exceed I_{max} or V_{max} when operating module**
- **Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries**


Thermoelectric Cooler Performance Specifications




TEC-30-36-127

Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	25.7	29.8
Delta Tmax(°C)	68	75
I _{max} (Amps)	3.0	3.0
V _{max} (Volts)	15.4	16.4
Module Resistance(Ohms)	4.13	4.69




**Tolerances for thermal and electrical parameters $\pm 10\%$.

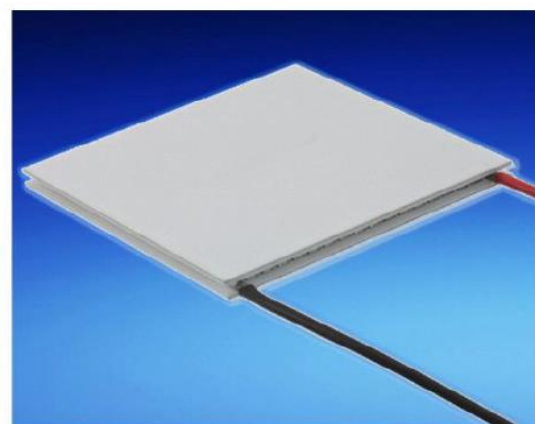


Performance Curves Th=25 °C

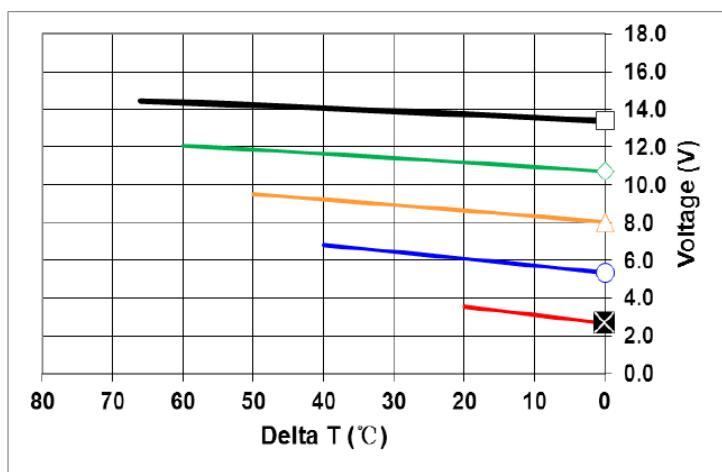

Performance Curves Th=50 °C

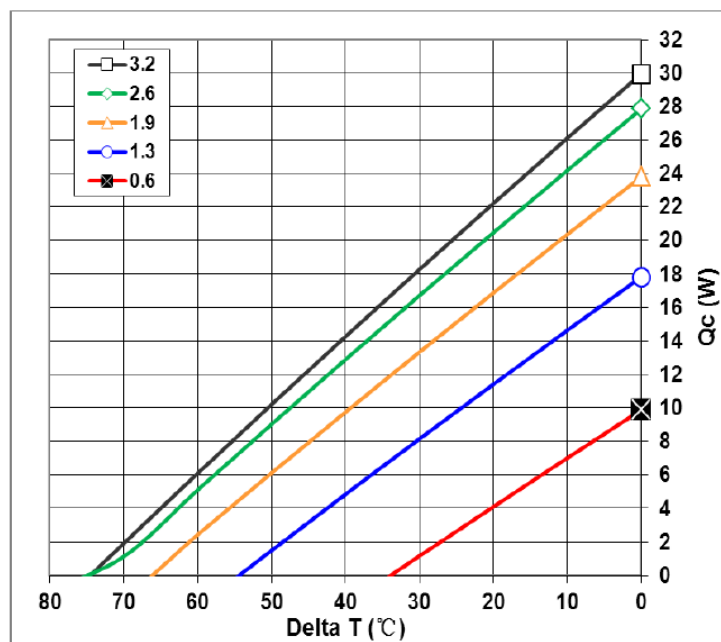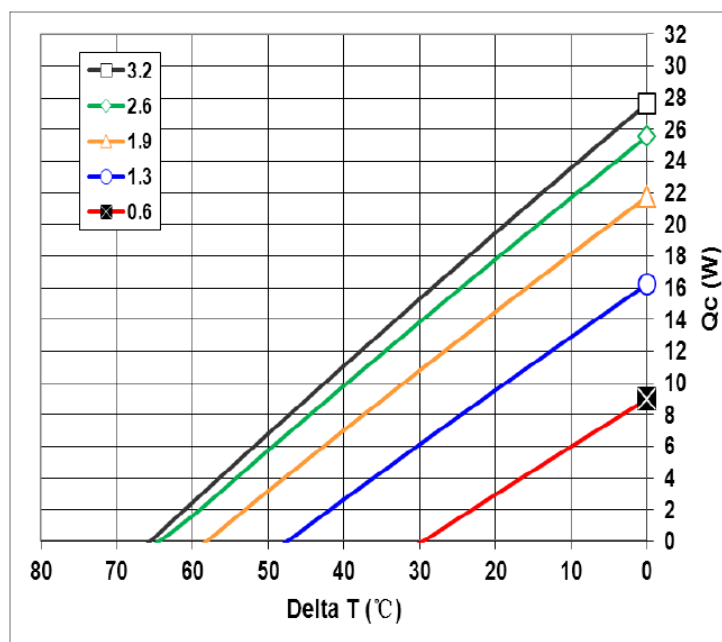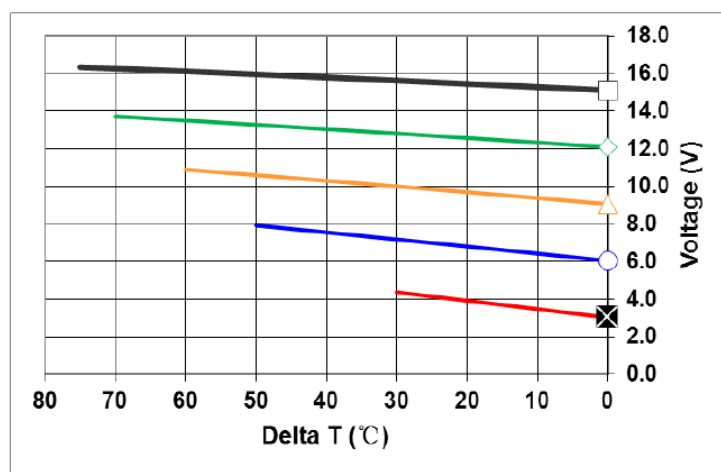

Mechanical Drawing:

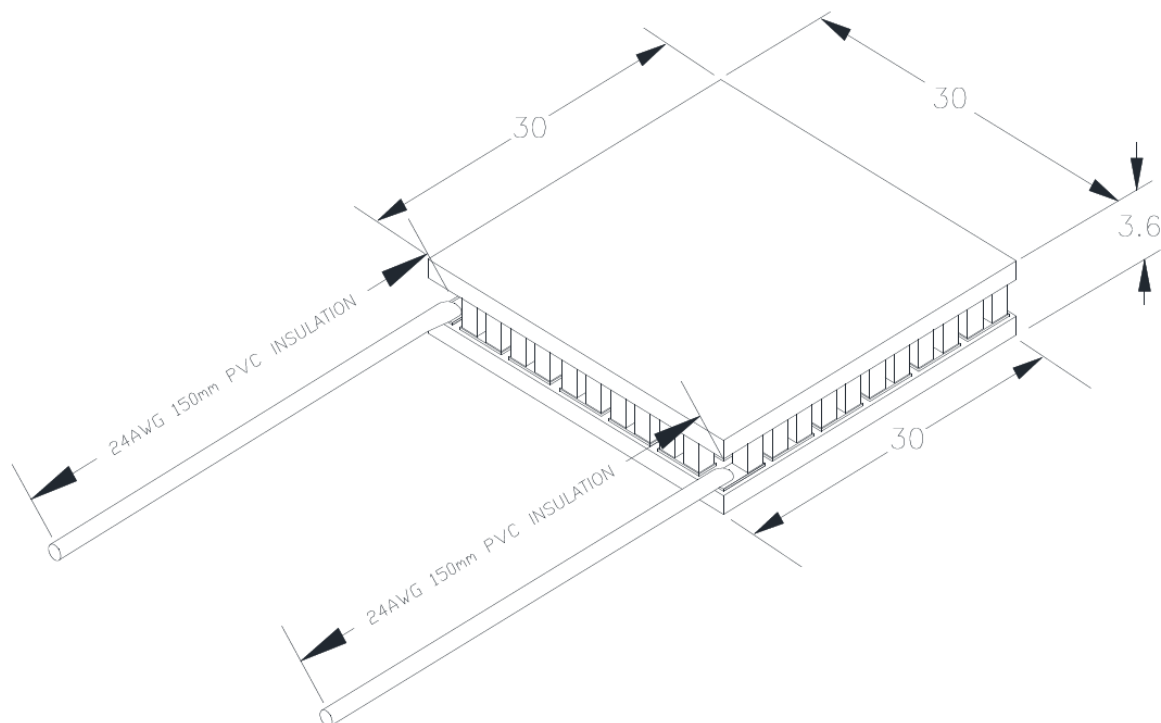

Operation Tips:

- Maximum Operating Temperature: 90°C
- Do not exceed I_{max} or V_{max} when operating module
- Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries


Thermoelectric Cooler Performance Specifications



TEC-30-39-71





Hot Side Temperature(°C)	27°C	50 °C
Qmax (Watts)	18.7	21.9
Delta Tmax(°C)	68	75
I _{max} (Amps)	4.0	4.0
V _{max} (Volts)	8.6	9.6
Module Resistance(Ohms)	1.86	2.1

**Tolerances for thermal and electrical parameters $\pm 10\%$.

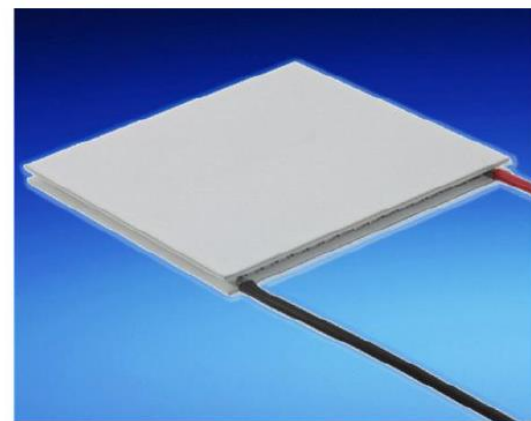


Performance Curves Th=25 °C

Performance Curves Th=50 °C

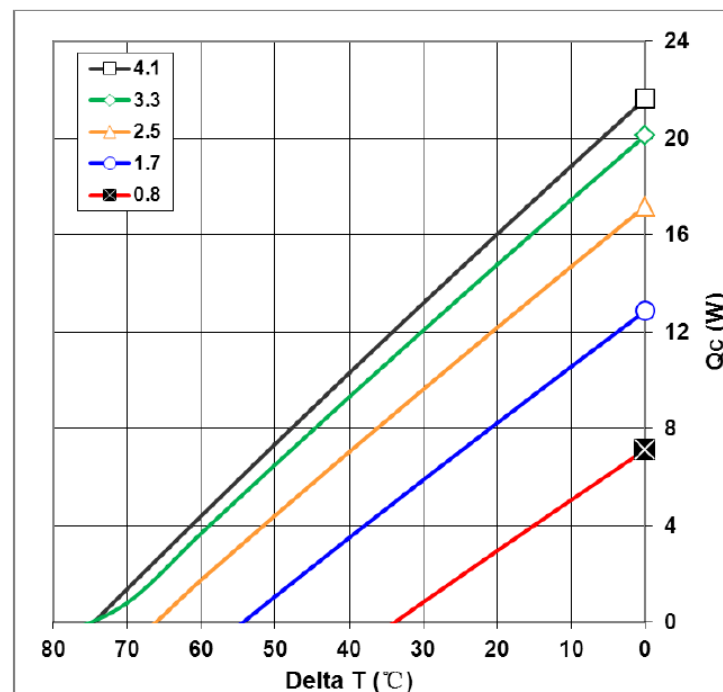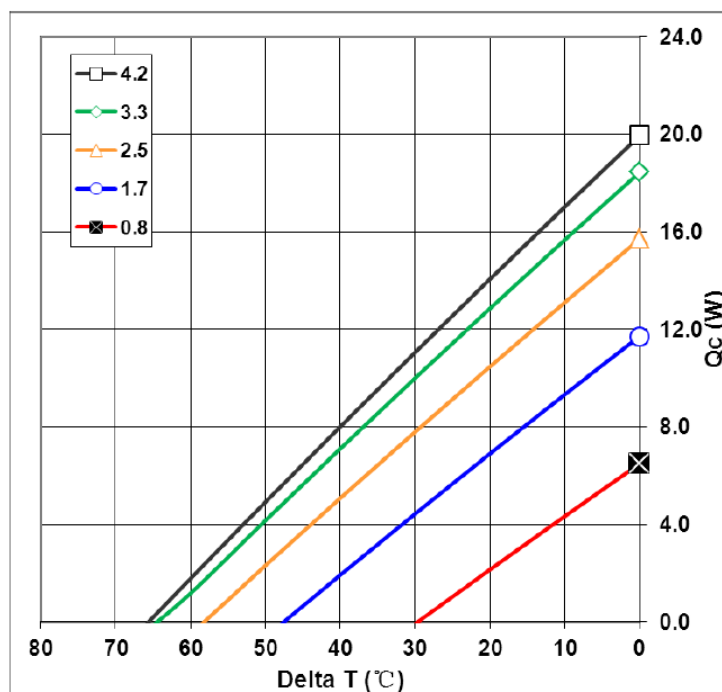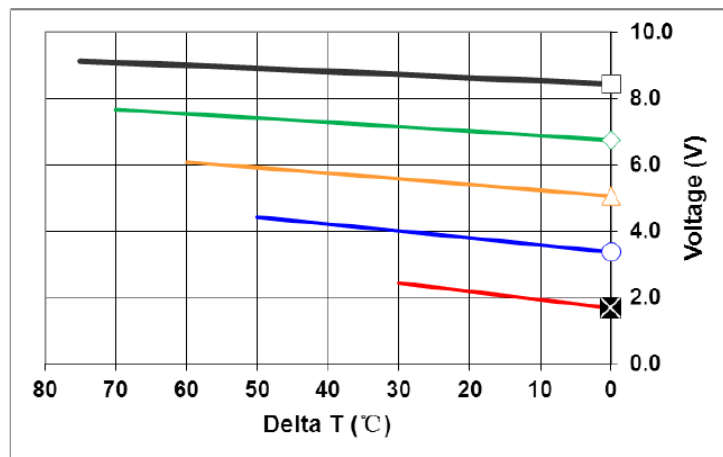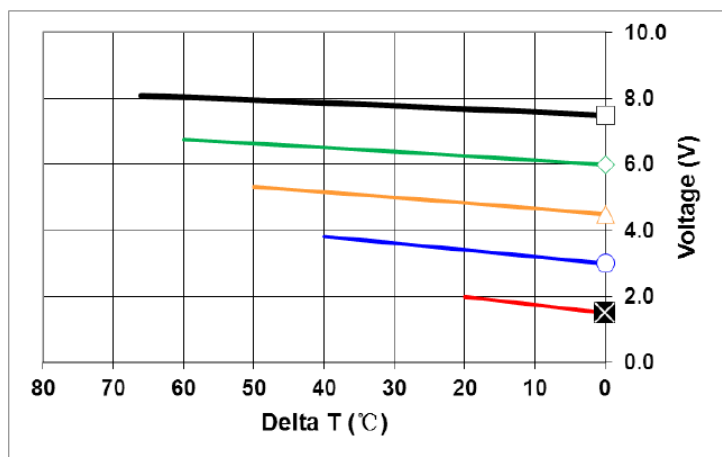

Mechanical Drawing:

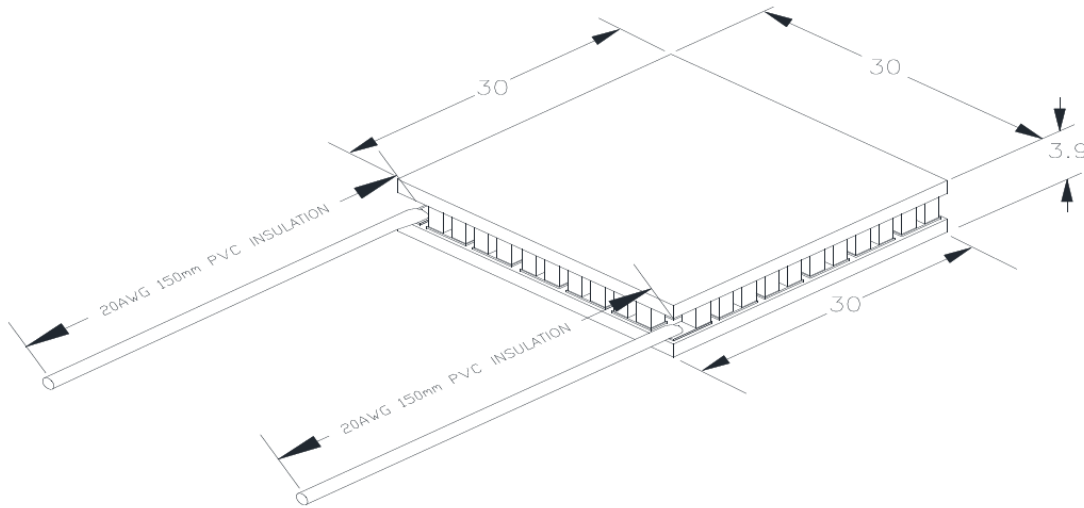

Operation Tips:

- **Maximum Operating Temperature: 90°C**
- **Do not exceed I_{max} or V_{max} when operating module**
- **Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries**


Thermoelectric Cooler Performance Specifications




TEC-30-36-71

Hot Side Temperature(°C)	27°C	50 °C
Qmax (Watts)	28.7	31.2
Delta Tmax(°C)	68	75
I _{max} (Amps)	6.0	6.0
V _{max} (Volts)	8.6	9.5
Module Resistance(Ohms)	1.24	1.41




**Tolerances for thermal and electrical parameters $\pm 10\%$.

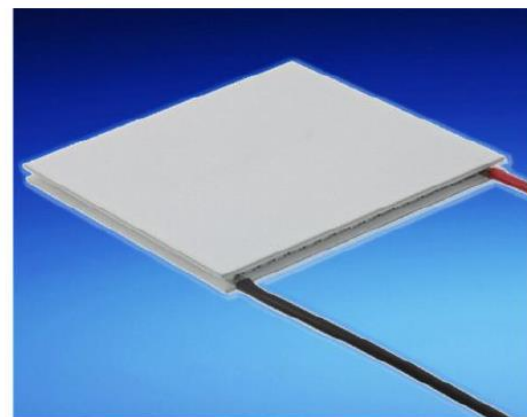


Performance Curves Th=25 °C

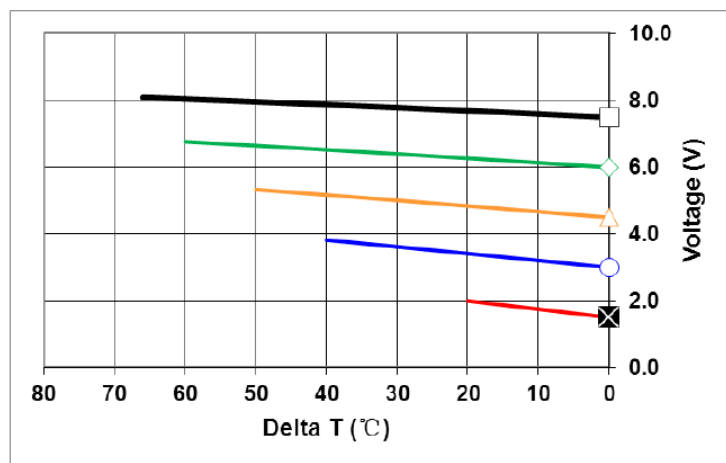

Performance Curves Th=50 °C

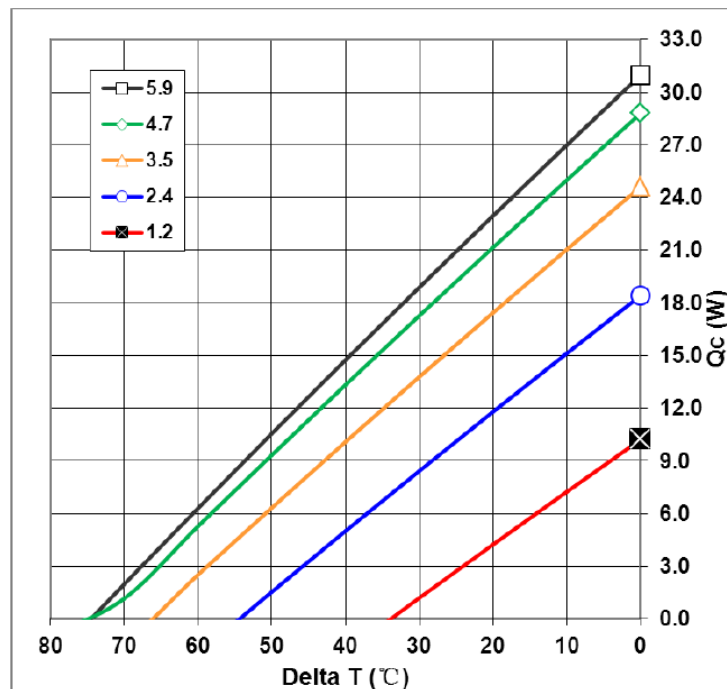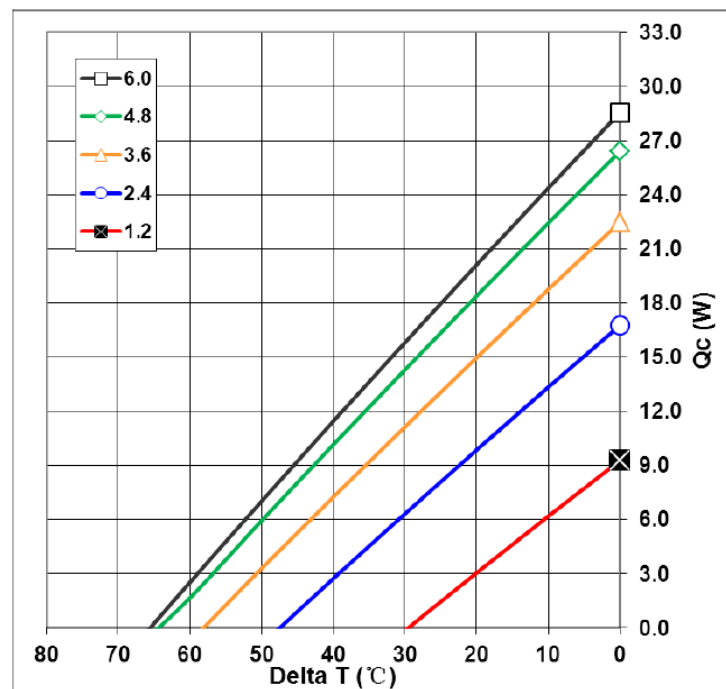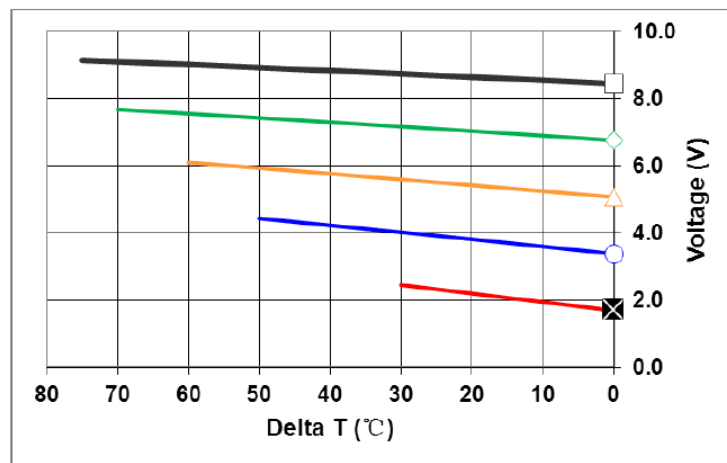

Mechanical Drawing:

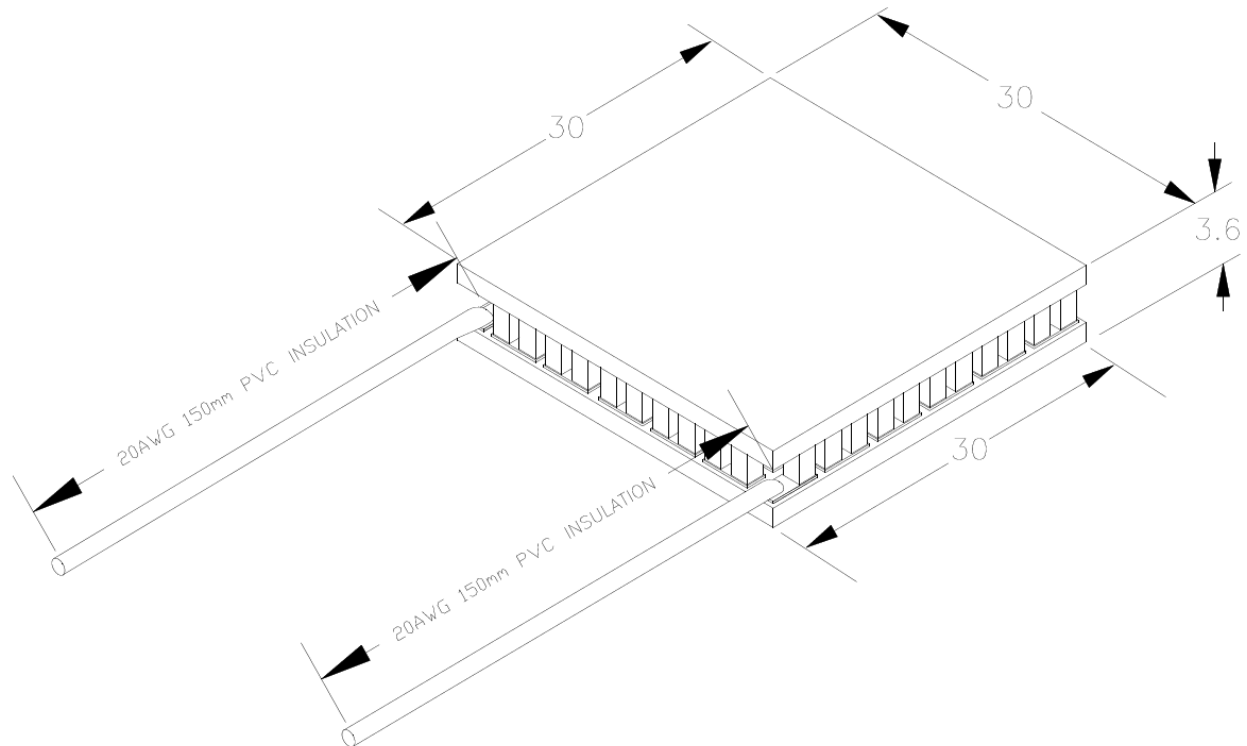


Operation Tips:

- **Maximum Operating Temperature: 90°C**
- **Do not exceed I_{max} or V_{max} when operating module**
- **Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries**

Thermoelectric Cooler Performance Specifications




TEC-40-36-127

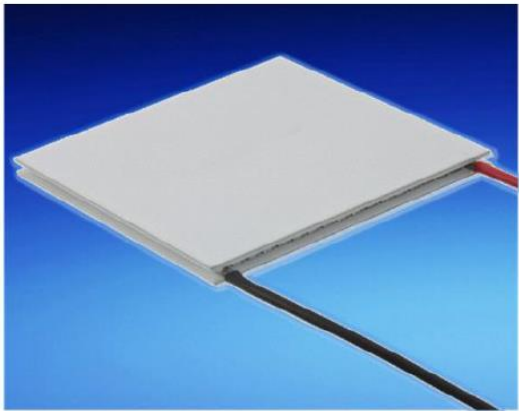




Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	51.4	55
Delta Tmax(°C)	68	75
I _{max} (Amps)	6.0	6.0
V _{max} (Volts)	15.4	16.4
Module Resistance(Ohms)	2.17	2.54

**Tolerances for thermal and electrical parameters ± 10%.


Performance Curves Th=25 °C

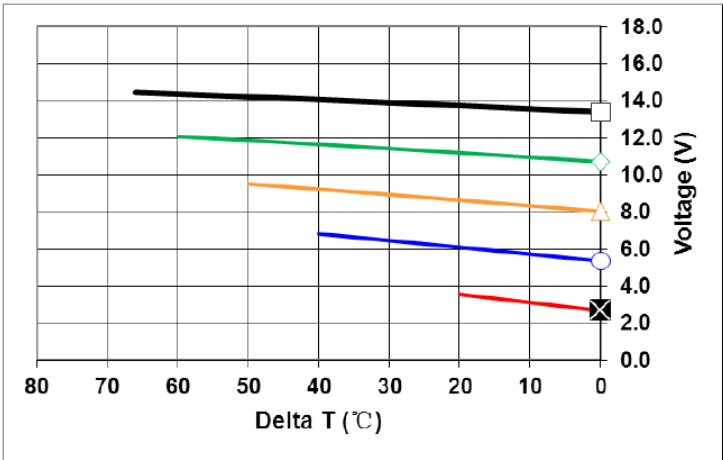

Performance Curves Th=50 °C

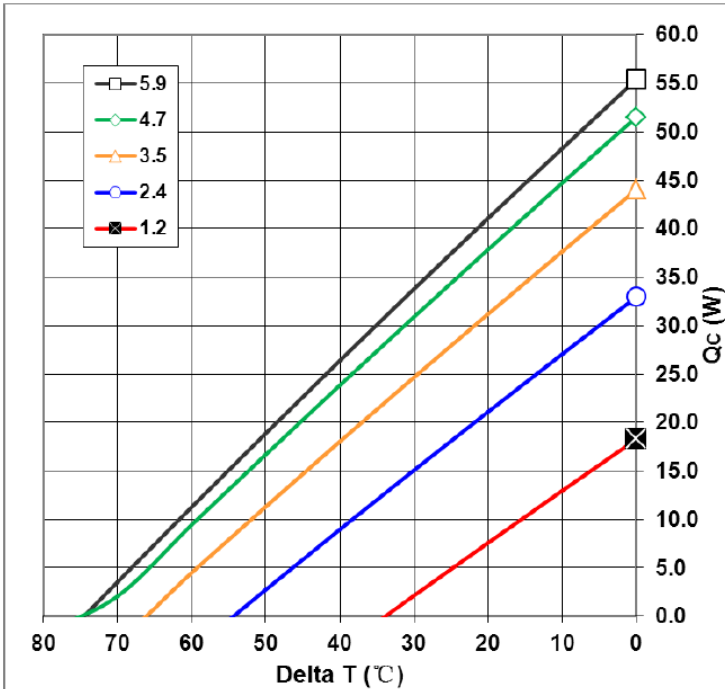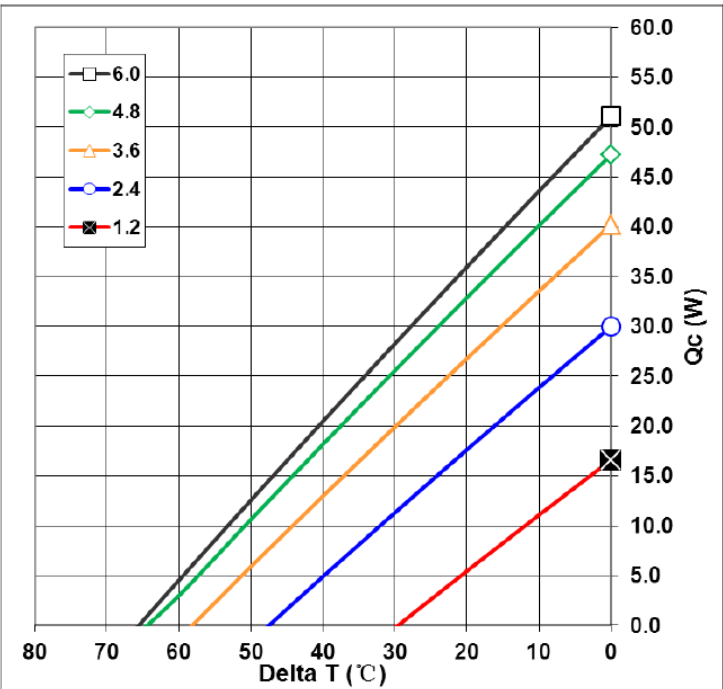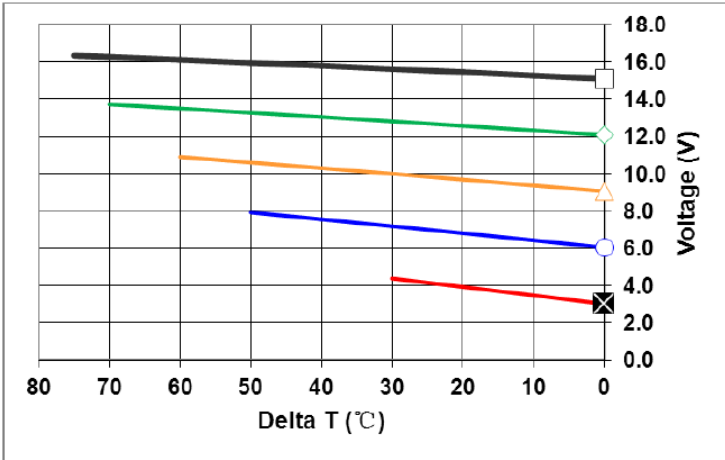

Mechanical Drawing:

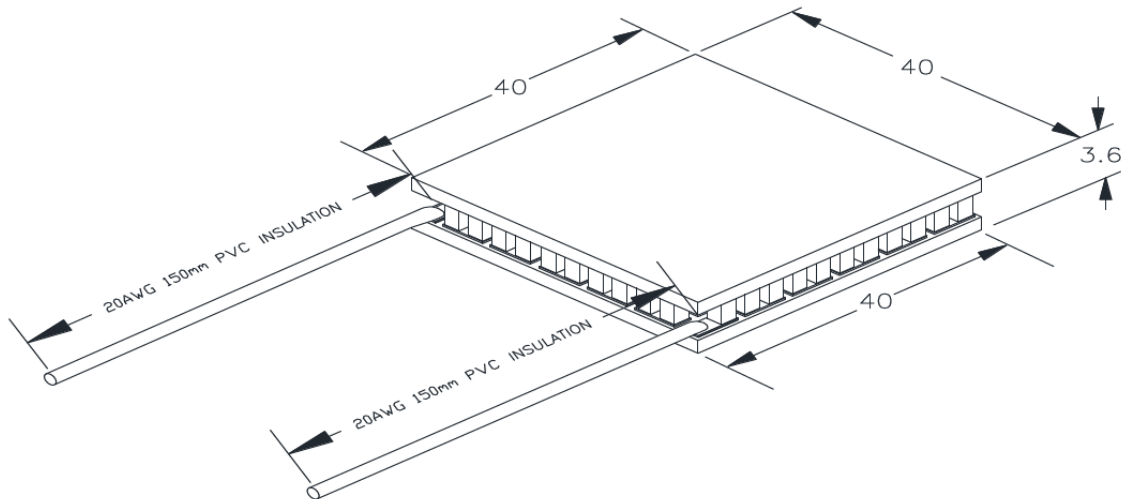

Operation Tips:

- Maximum Operating Temperature: 90°C
- Do not exceed I_{max} or V_{max} when operating module
- Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries


Thermoelectric Cooler Performance Specifications




TEC-20-33-31

Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	16.8	20.3
Delta Tmax(°C)	68	75
I _{max} (Amps)	8.5	8.5
V _{max} (Volts)	3.75	4.1
Module Resistance(Ohms)	0.38	0.42




**Tolerances for thermal and electrical parameters $\pm 10\%$.

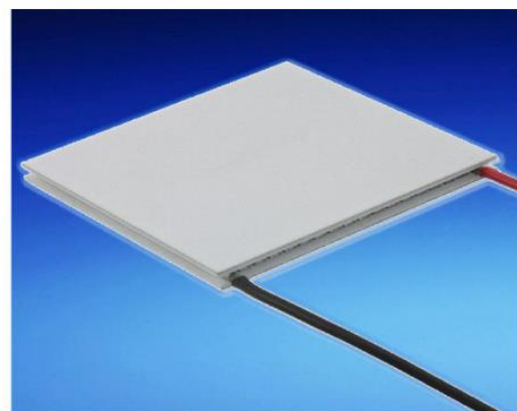


Performance Curves Th=25 °C

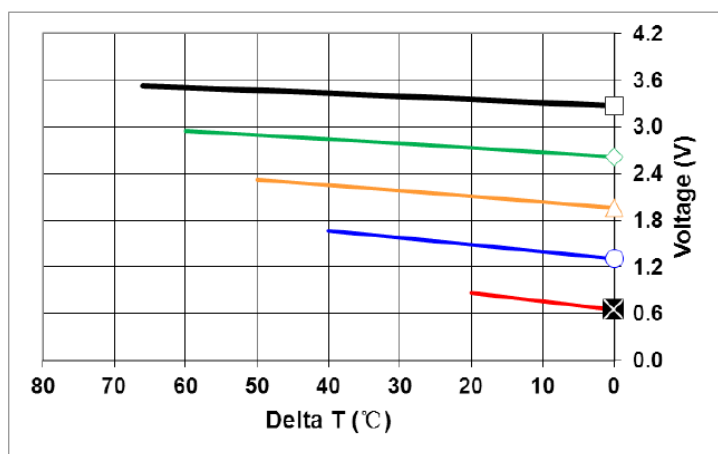

Performance Curves Th=50 °C

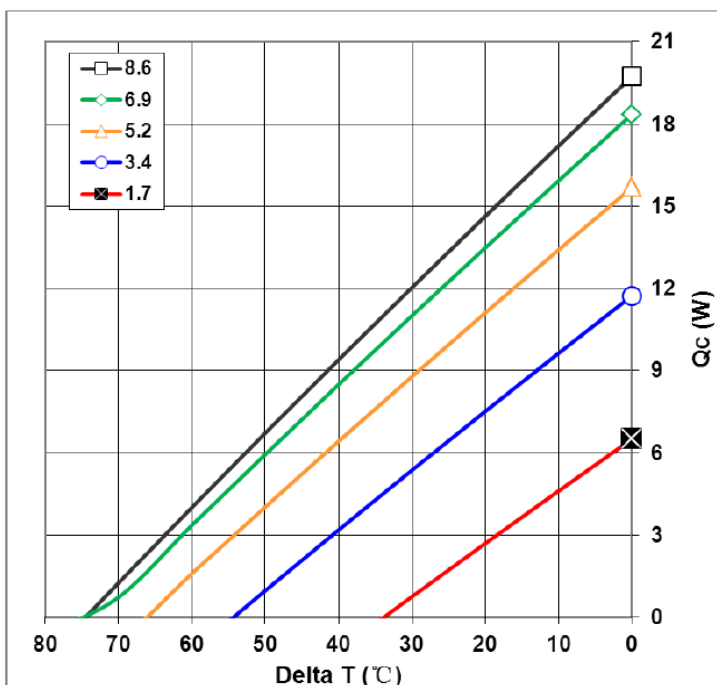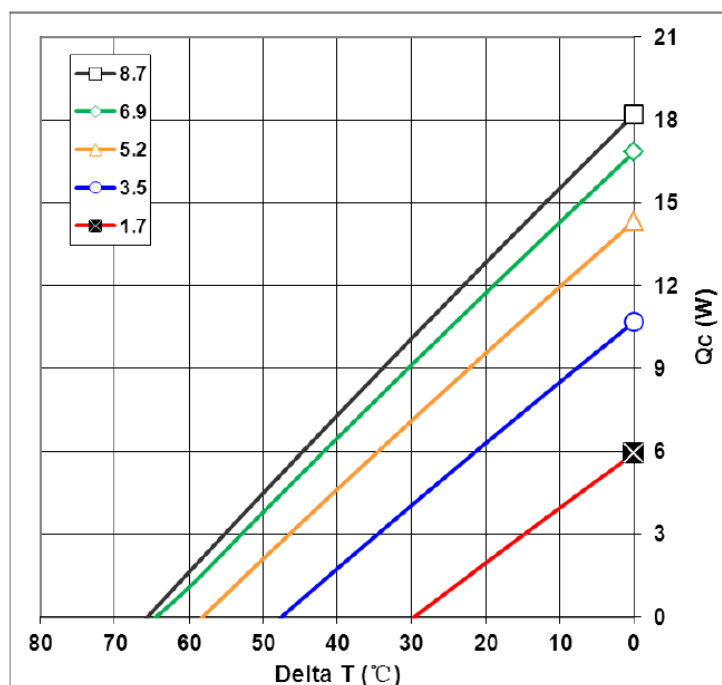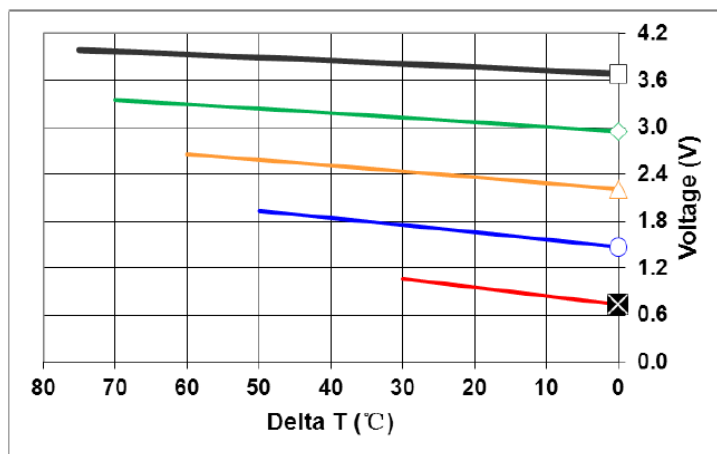

Mechanical Drawing:

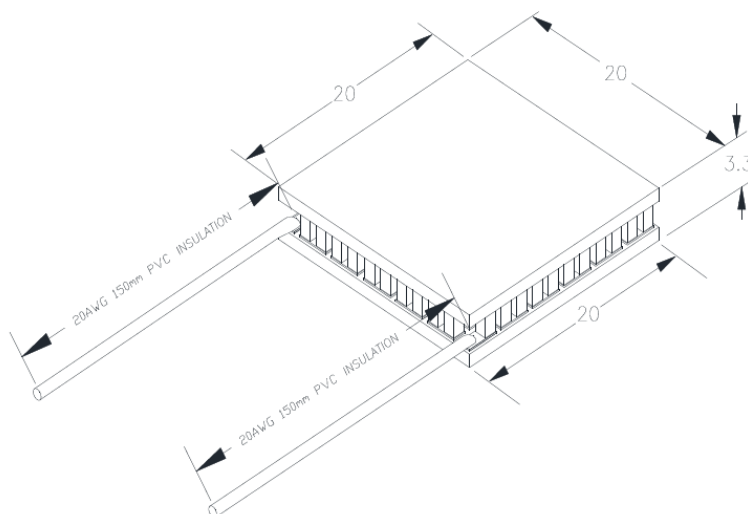

Operation Tips:

- Maximum Operating Temperature: 90°C
- Do not exceed I_{max} or V_{max} when operating module
- Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries


Thermoelectric Cooler Performance Specifications




TEC-30-33-71

Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	38.5	46
Delta Tmax(°C)	68	75
I _{max} (Amps)	8.5	8.5
V _{max} (Volts)	8.6	9.6
Module Resistance(Ohms)	0.86	0.97




**Tolerances for thermal and electrical parameters $\pm 10\%$.

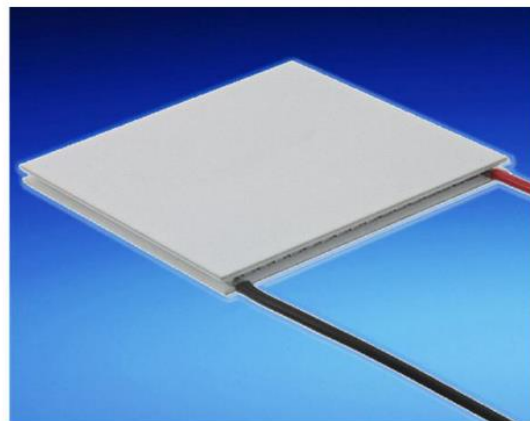


Performance Curves Th=25 °C

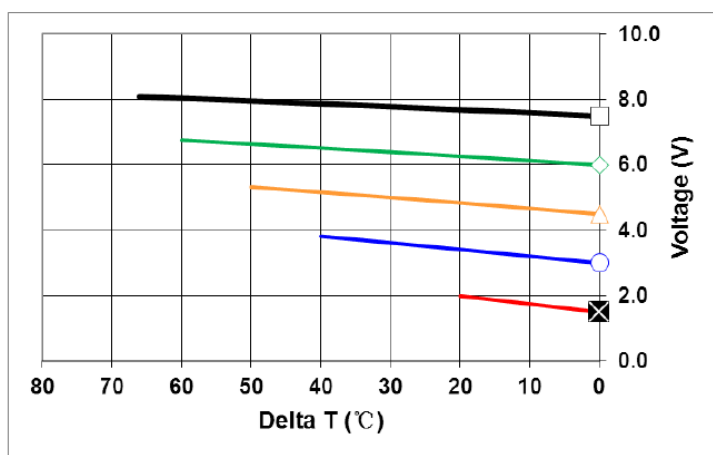

Performance Curves Th=50 °C

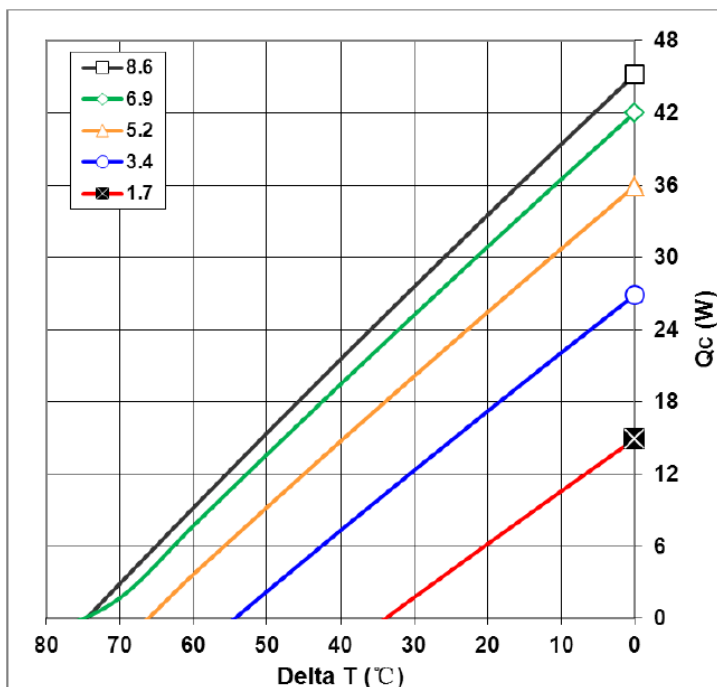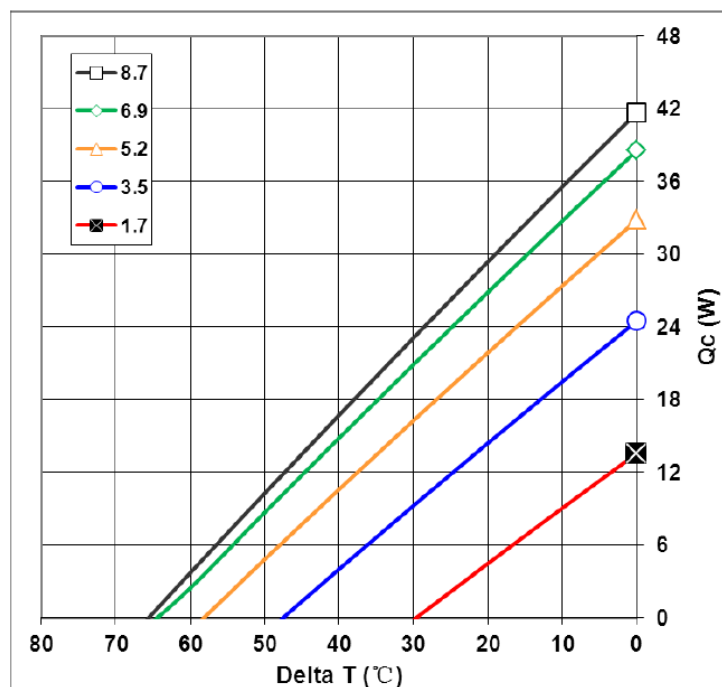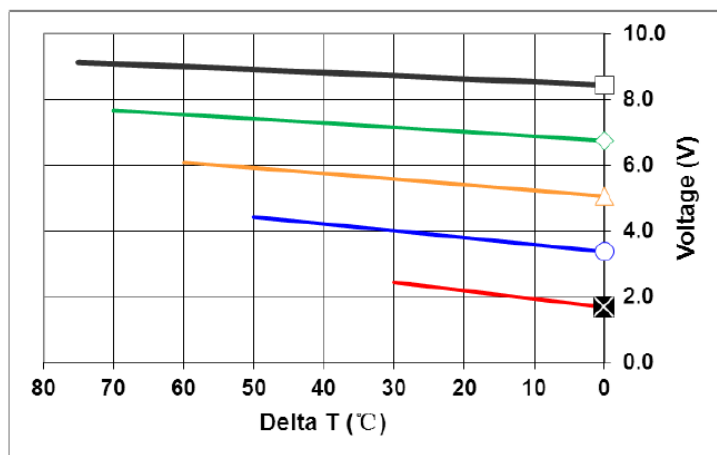

Mechanical Drawing:

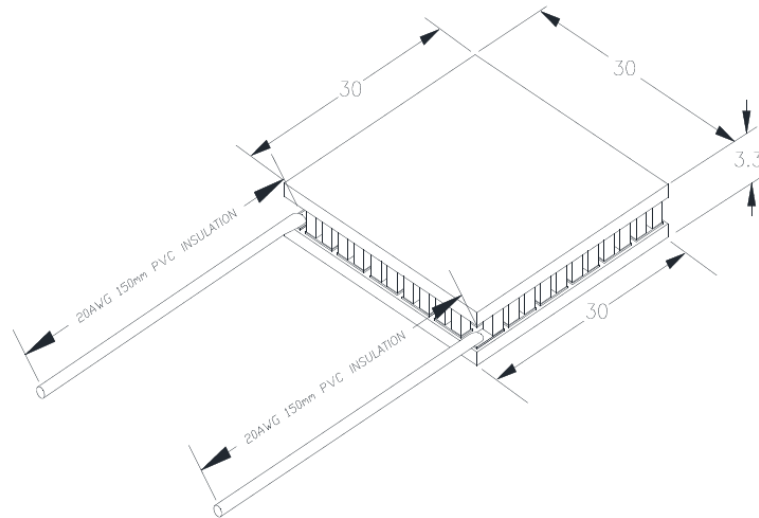

Operation Tips:

- Maximum Operating Temperature: 90°C
- Do not exceed I_{max} or V_{max} when operating module
- Please consult Wakefield-Vette for moisture and corrosion protection options as well as specific application inquiries



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331