

DESCRIPTION

Comprising single and multiple output models with 200 watts of continuous output power, the TM200 series is specially designed for medical applications. Auto-ranging input allows them to operate from any line voltage throughout the world without a selector strap. All auxiliary outputs are with magnetic amplifier or linear regulator to keep regulation. The units are constructed on a printed circuit board with a U-bracket for mechanical support and heat sinking. A cover-and-fan assembly can be added during manufacturing.

FEATURES

- Low safety ground leakage current
- Meet EN 55011 and FCC class B
- Auto-ranging input
- Short-circuit protection with auto-recovery
- Power Fail Detect (PFD) signal
- 100% burn-in at full rated load
- Optional cover-and-fan assembly

INPUT SPECIFICATIONS

Input voltage:	90 to 130 VAC, or 180 to 264 VAC (auto-ranging)
Input frequency:	47 to 63 Hz
Input current:	4.5A (rms) for 115VAC 2.6A (rms) for 230VAC
Leakage current:	90 μ A max. @ 115VAC, 60Hz 15 μ A max. @ 230VAC, 50Hz

OUTPUT SPECIFICATIONS

Output voltage/current :	See rating chart
Total output power :	200 watts maximum
Ripple and noise :	2% peak to peak maximum
Overvoltage protection :	Provided on output #1 only; set at 112 – 132% of its nominal output voltage
Overcurrent protection :	All outputs protected to short circuit conditions
Temperature coefficient :	All outputs $\pm 0.04\%/^{\circ}\text{C}$ maximum
Transient response :	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change
PFD signal :	TTL logic high for normal operation and TTL logic low upon loss of input power. This signal appears at least 1 ms prior to +5V output dropping 5% below its nominal value. This signal also provides a minimum delay of 100 ms after +5V is within regulation.

TM200 SERIES



Safety Standard Approvals:



UL 2601-1



CSA C22.2 No. 601.1



TÜV EN60601-1

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0°C to +70°C
Storage temperature:	-40°C to +85°C
Relative humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +50°C linearly to 50% at +70°C
Cooling:	25 CFM forced air, provided on covered version, to be provided for U-bracket version by user

GENERAL SPECIFICATIONS


Switching frequency :	64KHz $\pm 5\text{KHz}$
Efficiency :	70% minimum on all models
Hold-up time :	12 msec minimum at 110VAC
Line regulation :	$\pm 0.5\%$ maximum at full load
Inrush current :	20 amps @ 115VAC, or 40 amps @ 230VAC, at 25°C cold start
Withstand voltage :	4000VAC from input to output 1500VAC from input to ground 500VAC from output to ground
MTBF :	450,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217F
EMC Performance (EN60601-1-2: 2001)	
EN55011:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, $\pm 8\text{KV}$ air and $\pm 4\text{KV}$ contact
EN61000-4-3:	Radiated immunity, 3V/m
EN61000-4-4:	Fast transient/burst, $\pm 1\text{KV}$
EN61000-4-5:	Surge, $\pm 1\text{KV}$ diff, $\pm 2\text{KV}$ com.
EN61000-4-6:	Conducted immunity, 3Vrms
EN61000-4-8:	Magnetic field immunity, 1A/m
EN61000-4-11:	Voltage dips, 30% reduction for 500ms and >95% reduction for 10ms interruptions, >95% for 5000ms

OUTPUT VOLTAGE/CURRENT RATING CHART

Product No.	Output #1				Output #2				Output #3				Output #4				Maximum Output Power
	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	
TM200-S05	5V	3.0A	40A	2%		(N/A)				(N/A)				(N/A)			200W
TM200-S12	12V	1.2A	16.7A	2%		(N/A)				(N/A)				(N/A)			200W
TM200-S15	15V	1.0A	13.4A	2%		(N/A)				(N/A)				(N/A)			200W
TM200-S24	24V	0.6A	8.4A	2%		(N/A)				(N/A)				(N/A)			200W
TM200-S30	30V	0.5A	6.7A	2%		(N/A)				(N/A)				(N/A)			200W
TM200-S48	48V	0.5A	4.2A	2%		(N/A)				(N/A)				(N/A)			200W
TM200-D23	+5V	3.0A	30A	2%	+12V	0A	8A	4%		(N/A)				(N/A)			200W
TM200-D24	+5V	3.0A	30A	2%	+15V	0A	6A	4%		(N/A)				(N/A)			200W
TM200-D25	+5V	3.0A	30A	2%	+24V	0A	4A	4%		(N/A)				(N/A)			200W
TM200-T30	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-5V	0A	6A	4%		(N/A)			200W
TM200-T31	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%		(N/A)			200W
TM200-T32	+5V	3.0A	30A	2%	+15V	0A	6A	4%	-15V	0A	4A	4%		(N/A)			200W
TM200-T33	+5V	3.0A	30A	2%	+15V	0A	6A	4%	-12V	0A	4A	4%		(N/A)			200W
TM200-Q40	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%	5V	0A	6A	4%	200W
TM200-Q41	+5V	3.0A	30A	2%	+15V	0A	6A	4%	-15V	0A	4A	4%	24V	0A	4A	4%	200W
TM200-Q42	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%	12V	0A	4A	4%	200W
TM200-Q44	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-15V	0A	4A	4%	15V	0A	4A	4%	200W
TM200-Q45	+5V	3.0A	30A	2%	+12V	0A	8A	4%	-12V	0A	4A	4%	24V	0A	4A	4%	200W

- Notes:
- (1) Add suffix "C" for enclosed format, e.g. TM200-Q45C.
 - (2) Peak current is 12A on +12V, 9A on +15V and 6A on +24V.
 - (3) Output #4 is floating. It can be connected externally for positive or negative output.
 - (4) 200 watts for "C" version with a cover-and-fan assembly. 150 watts U-bracket version without moving air (maximum current of output #1 & #2 derated to 70%), or 200 watts with 25 CFM forced air provided by user.
 - (5) When the remote sense facility is not used, +Sense must be connected to +V, and -Sense to return, on P2 connector.
 - (6) All models may be operated at no-load. At no-load, output voltage tolerance increases to 10%

MECHANICAL SPECIFICATIONS

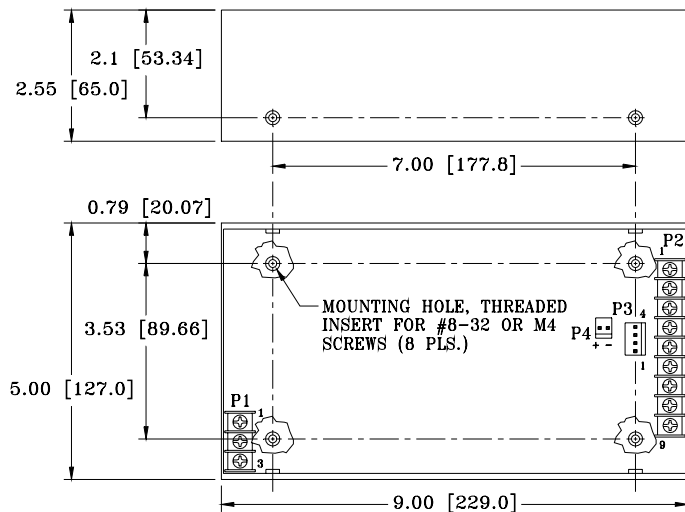

NOTES:

1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector P1 is Beau Inc. P/N 72-5-03C, output connector P2 is Beau Inc. P/N 72-5-09C. Screws are #6-32 on 0.375 inch centers.
4. Connector P3 mates with Molex housing 22-01-1043 and Molex 40445 series crimp terminal.
5. Connector P4 mates with Molex housing 22-01-1023 and Molex 40445 series crimp terminal.
6. P4 is for DC fan rated 24V/0.12A (models TM200-S24, -S30, -D25), or 12V/0.2A (other models)
7. Weight:
1.40 Kgs (3.08Lbs.) approx. for U-bracket version
1.60 Kgs (3.52 Lbs.) approx. for "C" version

PIN CHART

CON Product No. PIN		P1			P2						P3			
		1	2	3	1, 2	3, 4, 5	6	7	8	9	1	2	3	4
TM200-S05	TM200-S12	AC LIVE	AC	AC	-SENSE	RET.	OUTPUT #1	OUTPUT #1	OUTPUT #1	+SENSE	FAN	COM. RET.	COM. RET.	PFD
TM200-S15	TM200-S24		NEUTRAL	GROUND										
TM200-S30	TM200-S48													
TM200-D23	TM200-D24	AC LIVE	AC	AC	OUTPUT #1	COM. RET.	OUTPUT #2	N.C.	N.C.	N.C.	FAN	COM. RET.	COM. RET.	PFD
TM200-D25	TM200-D24		NEUTRAL	GROUND										
TM200-T30	TM200-T31	AC LIVE	AC	AC	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	N.C.	N.C.	FAN	COM. RET.	COM. RET.	PFD
TM200-T32	TM200-T33		NEUTRAL	GROUND										
TM200-Q40	TM200-Q41	AC LIVE	AC	AC	OUTPUT #1	COM. RET.	OUTPUT #2	OUTPUT #3	OUTPUT #4 RETURN	OUTPUT #4	FAN	COM. RET.	COM. RET.	PFD
TM200-Q42	TM200-Q44		NEUTRAL	GROUND										
TM200-Q45														

Tumbler Technologies + TRUMPower

3350 Scott Blvd., Bldg. 13, Santa Clara, California 95054, USA

Phone: 408-988-6616 • Fax: 408-988-6622 • email: sales@trumpower.com • Website: www.TRUMPower.com



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331