

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0752372103](#)  
**Status:** **Active**  
**Overview:** [gbx\\_backplane\\_connector\\_system](#)  
**Description:** 1.85mm by 1.85mm (.073 by .073") Pitch 5-Pair GbX® Backplane Connector System, Left Guide Header, 100 Circuits, Gold (Au) 0.76µm (30µ"), Pin Length 3.55mm (.140")

**Documents:**  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-75221-999 \(PDF\)](#)

**Agency Certification**

UL E29179

**General**

Product Family Backplane Connectors  
Series [75237](#)  
Application Backplane  
Application Tooling Documents <a href="http://www.molex.com/pdm\_docs/ats/TM-622022099.pdf">Tooling Manual</a>  
Comments Left Guide Header, No Keying Position  
Component Type PCB Header  
Overview [gbx\\_backplane\\_connector\\_system](#)  
Product Name GbX®  
Style N/A

**Physical**

Circuits (Loaded) 100  
Circuits (maximum) 100  
Color - Resin Gray (Dark)  
Durability (mating cycles max) 200  
First Mate / Last Break No  
Flammability 94V-0  
Guide to Mating Part Yes  
Keying to Mating Part Yes  
Material - Metal High Performance Alloy (HPA), Stainless Steel  
Material - Plating Mating Gold  
Material - Plating Termination Tin-Lead  
Material - Resin High Temperature Thermoplastic  
Number of Columns 10  
Number of Pairs 5  
Number of Rows 10  
Orientation Vertical  
PC Tail Length (in) 0.091 In  
PC Tail Length (mm) 2.30 mm  
PCB Locator No  
PCB Retention Yes  
PCB Thickness Recommended (in) 0.063 In  
PCB Thickness Recommended (mm) 1.60 mm  
Packaging Type Tray  
Pitch - Mating Interface (in) 0.073 In  
Pitch - Mating Interface (mm) 1.85 mm  
Pitch - Term. Interface (in) 0.073 In  
Pitch - Term. Interface (mm) 1.85 mm  
Plating min: Mating (µin) 30  
Plating min: Mating (µm) 0.76  
Plating min: Termination (µin) 30




image - Reference only

Series

**EU RoHS**  
**RoHS Compliant by Exemption**  
**REACH SVHC**  
Not Reviewed  
**Halogen-Free**  
**Status**  
**Not Reviewed**

**China RoHS**



Pb

**Need more information on product environmental compliance?**  
  
Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)  
  
Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[75237Series](#)

**Mates With**  
[75360 GbX® Daughtercard](#)

| Application Tooling   FAQ                                                                                                                                                       |                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document. |                            |
| Global                                                                                                                                                                          |                            |
| Description                                                                                                                                                                     | Product #                  |
| Insertion Tool, GbX®                                                                                                                                                            | <a href="#">0622022030</a> |
| 5 pair by 10 wide                                                                                                                                                               |                            |
| Insertion Tool, GbX®                                                                                                                                                            | <a href="#">0622022040</a> |
| 5 pair by 20 wide                                                                                                                                                               |                            |
| GbX® Single Pin                                                                                                                                                                 | <a href="#">0622022090</a> |
| Repair Tool                                                                                                                                                                     |                            |
| GbX® Shield                                                                                                                                                                     | <a href="#">0622022100</a> |
| Removal Tool                                                                                                                                                                    |                            |

|                                |                              |
|--------------------------------|------------------------------|
| Plating min: Termination (μm)  | 0.76                         |
| Polarized to PCB               | No                           |
| Stackable                      | No                           |
| Surface Mount Compatible (SMC) | Yes                          |
| Temperature Range - Operating  | 105°C                        |
| Termination Interface: Style   | Through Hole - Compliant Pin |

**Electrical**

|                               |                     |
|-------------------------------|---------------------|
| Current - Maximum per Contact | 1A                  |
| Data Rate                     | 8.0 Gbps            |
| Real Signals (per 25mm)       | 135                 |
| Shield Type                   | Ground Plane Shield |
| Shielded                      | Yes                 |
| Voltage - Maximum             | 120V AC (RMS)/DC    |

**Material Info**



**Reference - Drawing Numbers**

|                       |              |
|-----------------------|--------------|
| Product Specification | PS-75221-999 |
| Sales Drawing         | SD-75237-210 |

GbX is a registered trademark of Amphenol Corporation.

This document was generated on 05/17/2010  
**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

20 19 18 17 16 15 14 13 12 11 75237 9 8 7 6 5 4 3 2 1

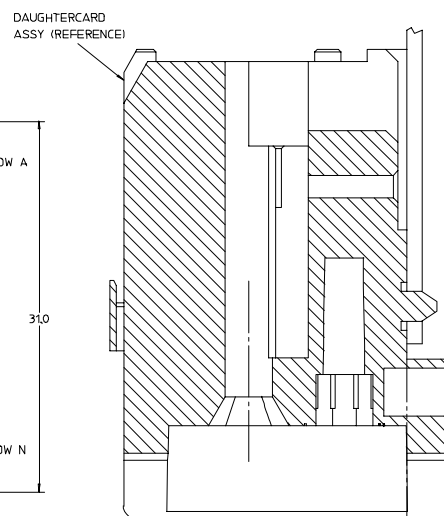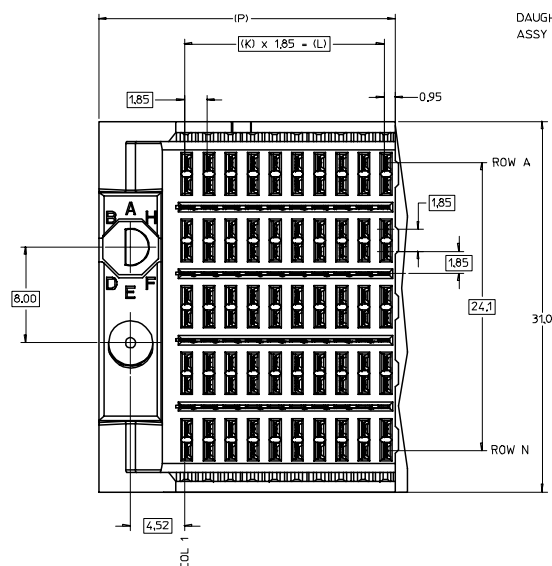

- NOTES:
1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0, COLOR - GRAY, SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
  2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA, SELECTIVE TIN/LEAD (Sn/Pb) ON PCB TAILS, NICKEL (Ni) OVERALL.
  3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
  4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
  5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
  6. PACKAGE PER PK-70873-565.
  7. MARK PART NUMBER AND DATE CODE, APPROXIMATELY WHERE SHOWN.
  8. OPTIONAL HOLE LOCATION FOR GROUNDED GUIDE PIN OR ADDITIONAL GUIDE PIN SUPPORT, FOR GROUNDED GUIDE PIN, HOLE TO BE PLATED, DRILL SIZE  $\phi 2.58$ , PAD SIZE:  $\phi 5.50$
  9. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.

MODULE ORIENTATION  
2- LEFT



75237-2\*\*\*

COLUMN  
1 = 10 COL  
2 = 25 COL

PIN LENGTH  
DIM "M"  
3-3.55 mm  
4-4.55 mm  
5-5.55 mm

KEYING ORIENTATION  
(SEE TABLE)

| PART NUMBER TABLE |    |       |       |                                 |
|-------------------|----|-------|-------|---------------------------------|
| ASSY PART NO.     | K  | L     | P     | TOTAL NO. OF DIFFERENTIAL PAIRS |
| 75237-210*        | 9  | 16.65 | 24.78 | 50                              |
| 75237-220*        | 24 | 44.40 | 52.53 | 125                             |

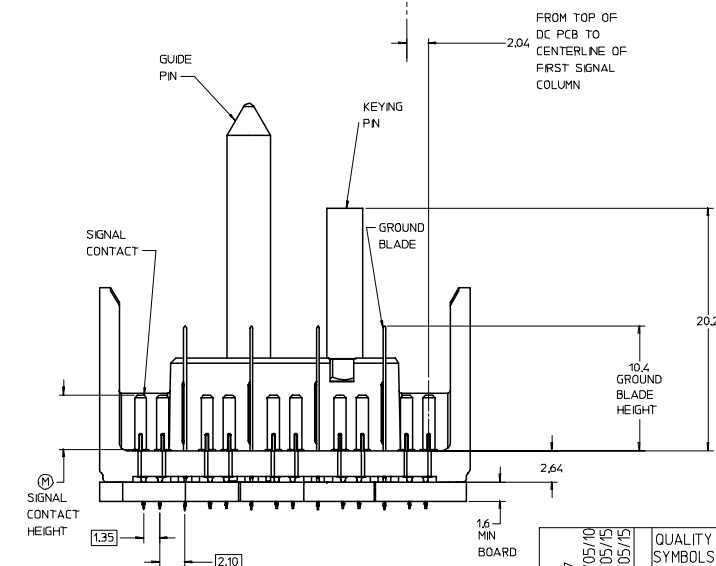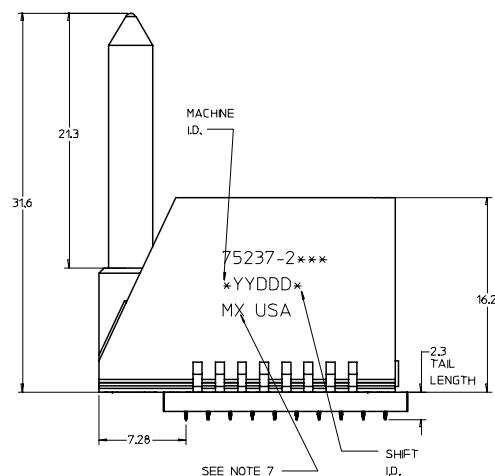


ROWS AG & NG RECOMMENDED FOR ALL APPLICATIONS. THESE ROWS SHOULD BE CONNECTED TO GROUND

$\phi 2.45 \pm 0.10$   
SEE NOTE 8

MATING SIDE OF SHIELD (OPPOSITE RIB SIDE OF CONTACT)

MATING SIDE OF SIGNAL (RIB SIDE OF CONTACT)

BACKPLANE HOLE PATTERN (COMPONENT SIDE) 10 POS, SHOWN

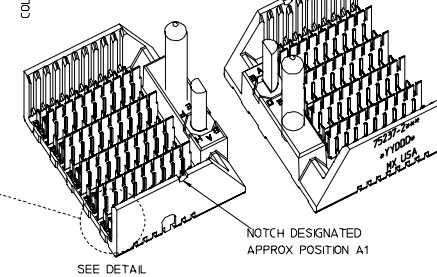

DETAIL SCALE 10:1

SEE DETAIL

NOTCH DESIGNATED APPROX POSITION A1

| P/N<br>75237-( )       | -xx0* | -xx1* | -xx2* | -xx3* | -xx4* | -xx5* | -xx6* | -xx7* | -xx8* |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| KEYING PIN ORIENTATION |       |       |       |       |       |       |       |       |       |

|         |                                                                                               |             |                 |                                       |            |                 |                        |                                                                                       |                                                                                                                               |                    |  |
|---------|-----------------------------------------------------------------------------------------------|-------------|-----------------|---------------------------------------|------------|-----------------|------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------|--|
| REVISED | EC NO: UCP2007-2827<br>DRWN: JINGHAM 2007/05/10<br>CHKD: 2007/05/15<br>APPR: SREED 2007/05/15 | DESCRIPTION | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) |            | SCALE<br>5:1    | DESIGN UNITS<br>METRIC |  | THIRD ANGLE<br>PROJECTION                                                                                                     | REVISE ON CAD ONLY |  |
|         |                                                                                               |             |                 |                                       |            | DIMENSION STYLE |                        |                                                                                       | TITLE                                                                                                                         |                    |  |
|         |                                                                                               |             |                 |                                       |            | MM ONLY         |                        |                                                                                       | GBX 5-PAIR<br>LEFT END BACKPLANE<br>SALES ASSEMBLY                                                                            |                    |  |
|         |                                                                                               |             |                 |                                       |            | DRAWN BY        | DATE                   |                                                                                       | MOLEX INCORPORATED                                                                                                            |                    |  |
|         |                                                                                               |             |                 |                                       |            | NMARTIN         | 2004/03/11             |                                                                                       |                                                                                                                               |                    |  |
|         |                                                                                               |             |                 | CHECKED BY                            | DATE       | MATERIAL NO.    |                        | DOCUMENT NO.                                                                          | SHEET NO.                                                                                                                     |                    |  |
|         |                                                                                               |             |                 | SPEED                                 | 2004/03/11 | SEE CHART       |                        | SD-75237-210                                                                          | 1 OF 1                                                                                                                        |                    |  |
|         |                                                                                               |             |                 | ANGULAR ±---°                         |            | APPROVED BY     |                        | DATE                                                                                  | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                    |  |
|         |                                                                                               |             |                 | DRAFT WHERE APPLICABLE                |            | CBIXLER         |                        | 2004/03/11                                                                            |                                                                                                                               |                    |  |
|         |                                                                                               |             |                 | MUST REMAIN WITHIN DIMENSIONS         |            |                 |                        |                                                                                       |                                                                                                                               |                    |  |

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331