


3-INPUT / 2-INPUT VIDEO SWITCH


■ GENERAL DESCRIPTION

The **NJM2508** is video switch for video and audio signal. It contains 3 input-1 output and 2 input-1 output video switch. One input terminal has clamp function and so is applied to fixed DC level of video signal. Its operating voltage is 4.75 to 13V and bandwidth is 10MHz. Crosstalk is 75dB (at $f = 4.43\text{MHz}$)


■ PACKAGE OUTLINE



NJM2508D



NJM2508M



NJM2508V

■ FEATURES

- Operating Voltage (+4.75V to +13V)
- 3 Input-1 Output and 2 Input-1 Output
- Crosstalk 75dB (at 4.43MHz)
- Wide Frequency Range 10MHz ($2V_{P-P}$ Input)
- Package Outline DIP16, DMP16, SSOP16
- Bipolar Technology


■ RECOMMENDED OPERATING CONDITION

- Operating Voltage V^+ 4.75V to 13.0V

■ APPLICATION

- VCR, Video Camera, AV-TV, Video Disk Player.

■ BLOCK DIAGRAM

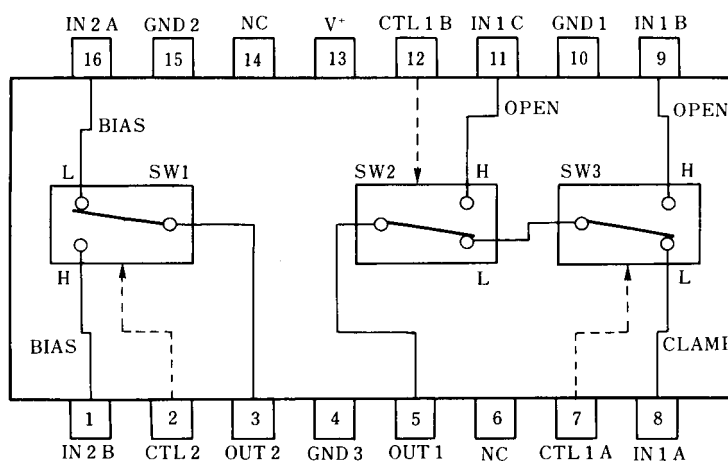

NJM2508D

NJM2508M

NJM2508V

■ ABSOLUTE MAXIMUM RATINGS

(T_a = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	14	V
Power Dissipation	P _D	(DIP16) 700 (DMP16) 350 (SSOP16) 300	mW mW mW
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

■ ELECTRICAL CHARACTERISTICS


(V⁺ = 5V, T_a = 25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current 1	I _{CC1}	V ⁺ = 5V (Note1)	6.6	9.4	12.3	mA
Operating Current 2	I _{CC2}	V ⁺ = 9V (Note1)	8.0	11.5	15.0	mA
Voltage Gain	G _V	V _I = 2V _{P-P} / 100kHz, V _O / V _I	-0.6	-0.1	+0.4	dB
Frequency Response	G _f	V _I = 2V _{P-P} , V _O (10MHz / 100kHz)	-1.0	0	+1.0	dB
Differential Gain	DG	V _I = 2V _{P-P} , Staircase Signal	-	0.3	-	%
Differential Phasa	DP	V _I = 2V _{P-P} , Staircase Signal	-	0.3	-	deg
Output offset Voltage	V _{OS}	(Note2)	-10	0	+10	mV
Crosstalk	CT	V _I = 2V _{P-P} , 4.43MHz, V _O / V _I	-	-75	-	dB
Switch Change Voltage	V _{CH}	All inside SW : ON	2.5	-	-	V
Switch Change Voltage	V _{CL}	All inside SW : OFF	-	-	1.0	V

(Note1) S1 = S2 = S3 = S4 = S5 = S6 = S7 = 1

(Note2) Output DC Voltage Difference is tested on S6 = 1→2, S1 = S2 = S3 = S4 = S5 = 1, S8 = 2 and S7 = 1

■ TEST CIRCUIT

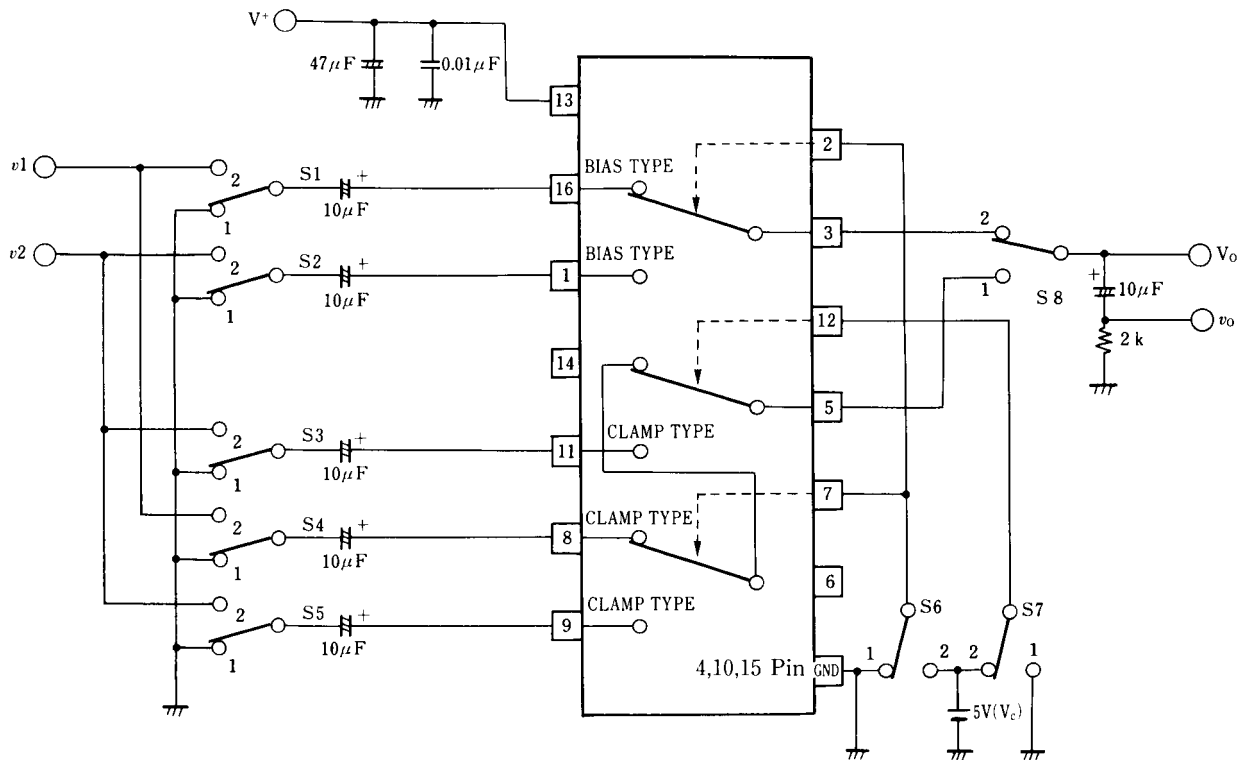


■ PIN FUNCTION


PIN No.	PIN NAME	DC VOLTAGE	INSIDE EQUIVALENT CIRCUIT
16 1	IN 2 A IN 2 B [Input]	2.5V	
8	IN 1 A [Input]	1.5V	
9 11	IN 1 B IN 1 C [Input]		
7 12 2	CTL 1 A CTL 1 B CTL 2 [Control]		
5	OUT1 [Output]	1.8V	
3	OUT2 [Output]	0.8V	
13	V ⁺	5V	
15 4 10	GND 1 GND 2 GND 3		

■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)


Operating Current vs. Operating Voltage

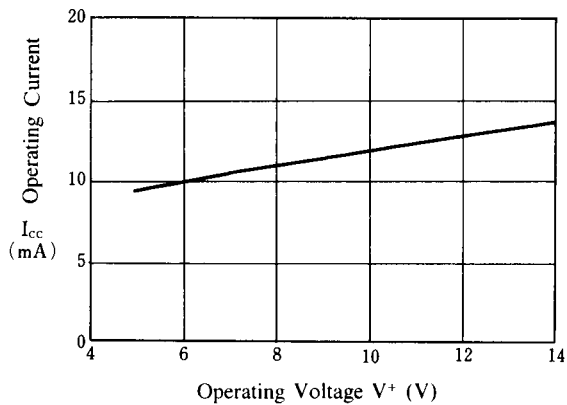


Operating Current vs. Ambient Temperature

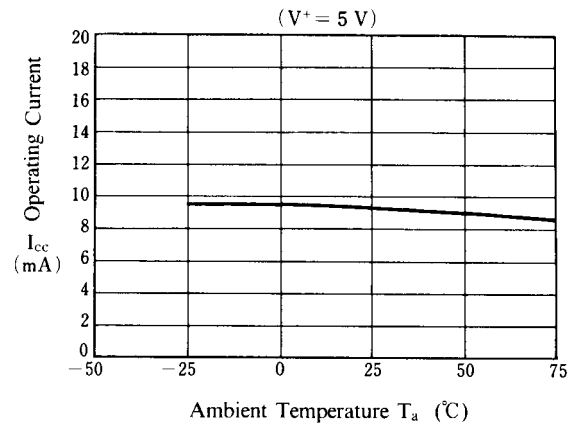


Operating Current vs. Ambient Temperature

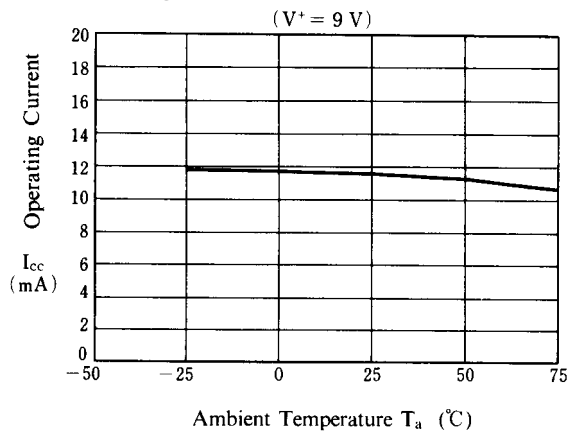


Voltage Gain vs. Operating Voltage

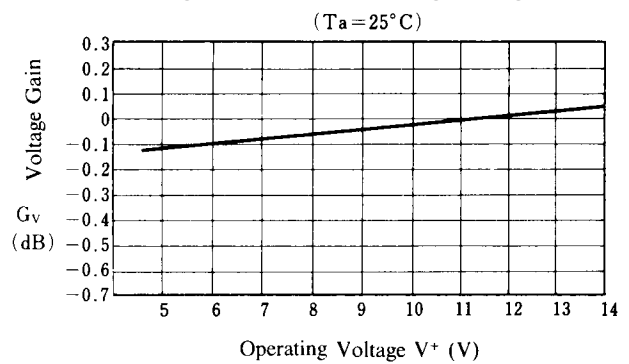







Voltage Gain vs. Frequency

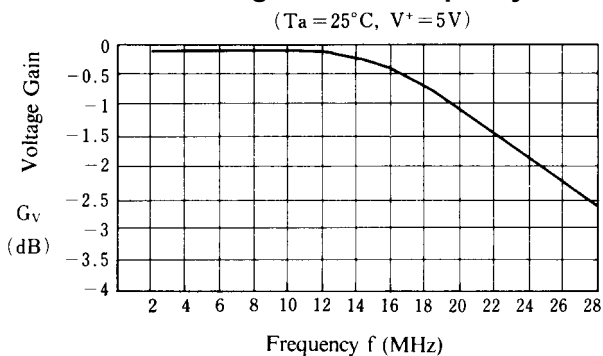







Voltage Gain vs. Ambient Temperature

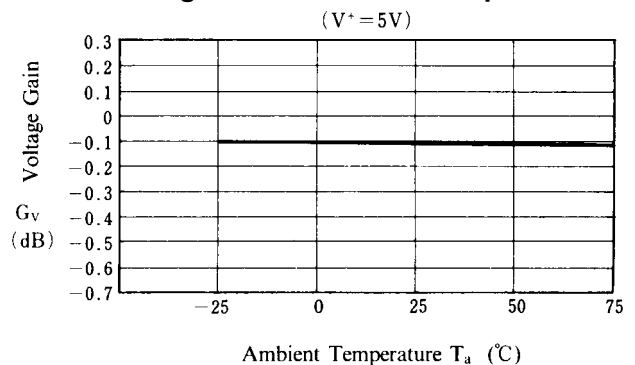

■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

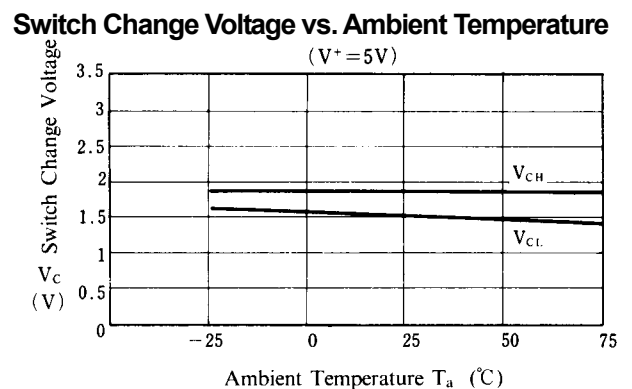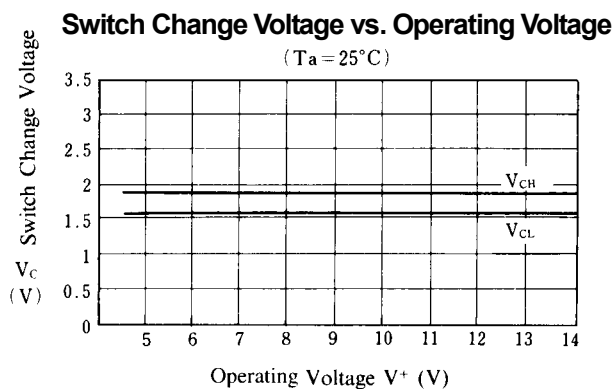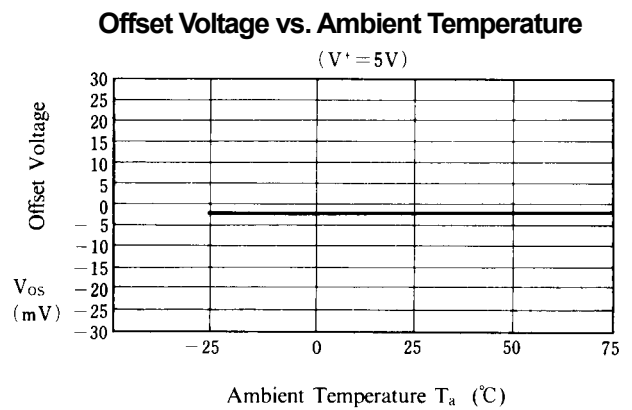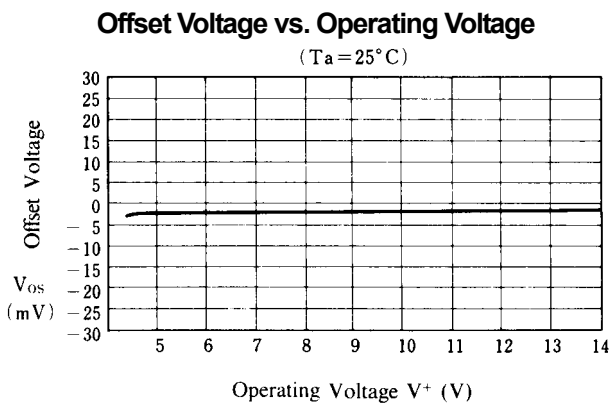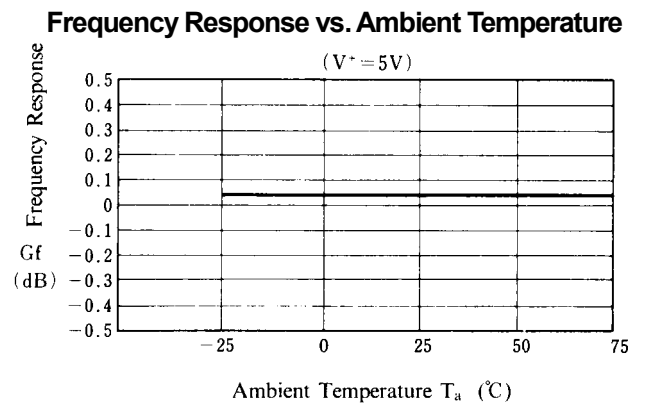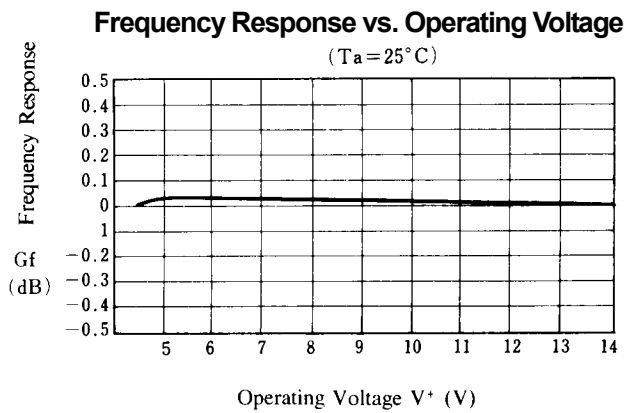


■ TYPICAL CHARACTERISTICS ($T_a = +25^\circ\text{C}$)

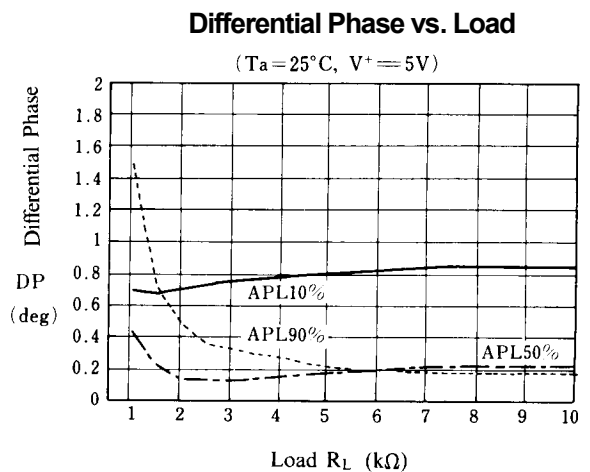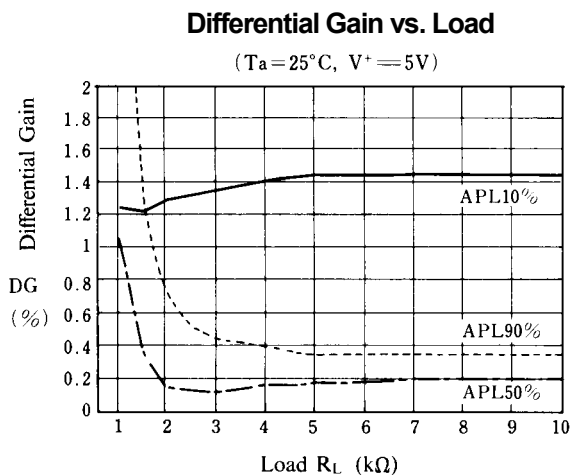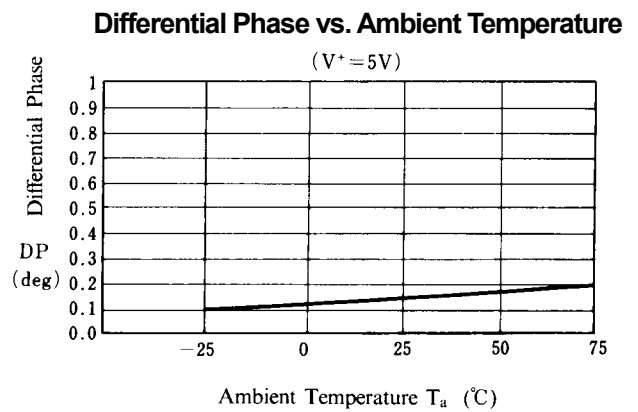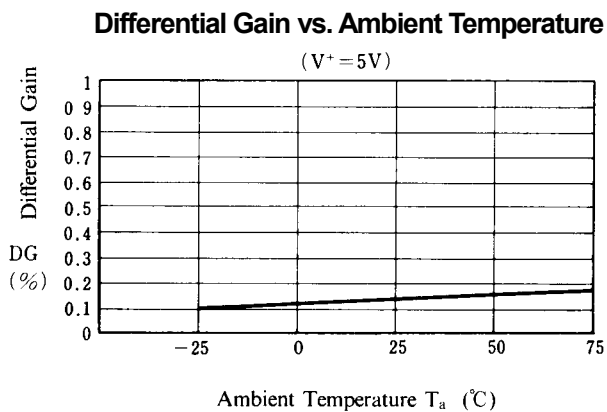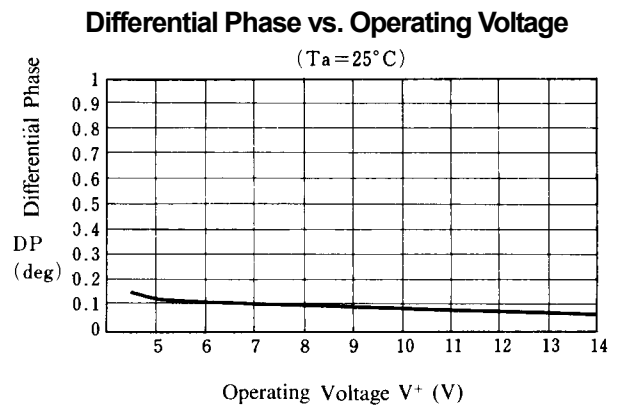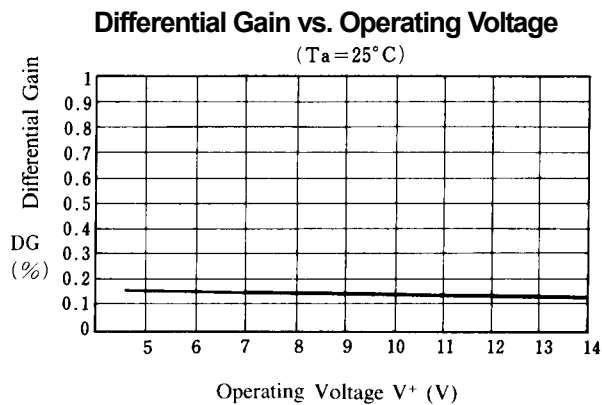

■ TYPICAL CHARACTERISTICS (Ta = +25°C)


Differential Gain vs. APL

(Ta = 25°C, V⁺ = 5V)

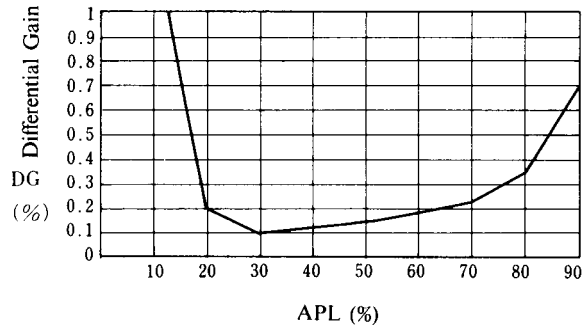


Differential Phase vs. APL

(Ta = 25°C, V⁺ = 5V)

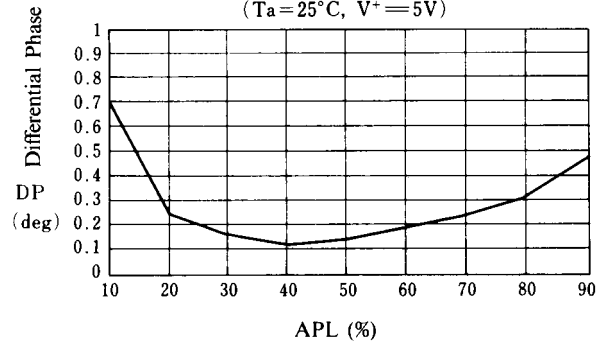


Differential Gain vs. Load

(Ta = 25°C, V⁺ = 5V)

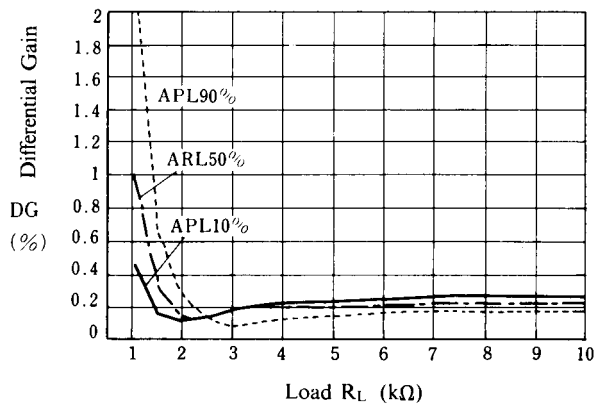


Differential Phase vs. Load

(Ta = 25°C, V⁺ = 5V)

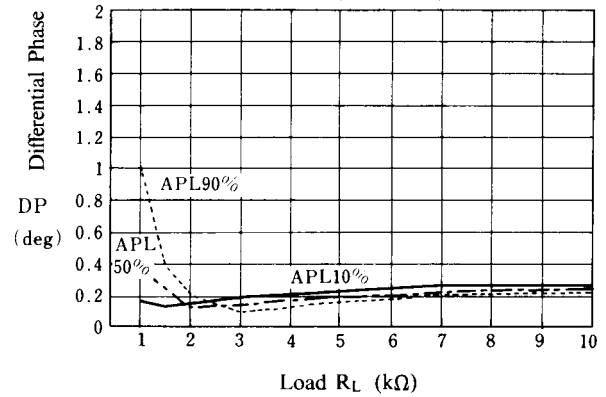


Differential Gain vs. APL

(Ta = 25°C, V⁺ = 5V)






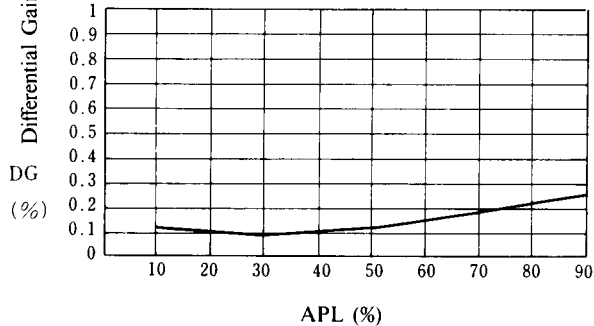


Differential Phase vs. APL


(Ta = 25°C, V⁺ = 5V)

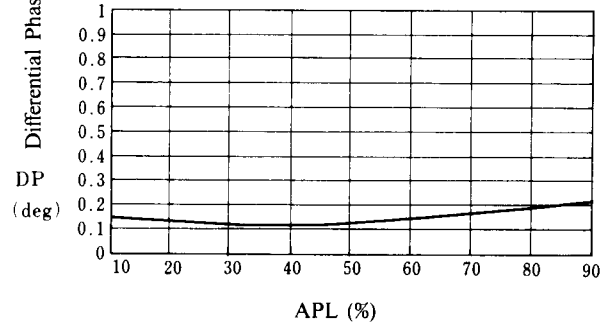

■ TYPICAL CHARACTERISTICS (Ta = +25°C)

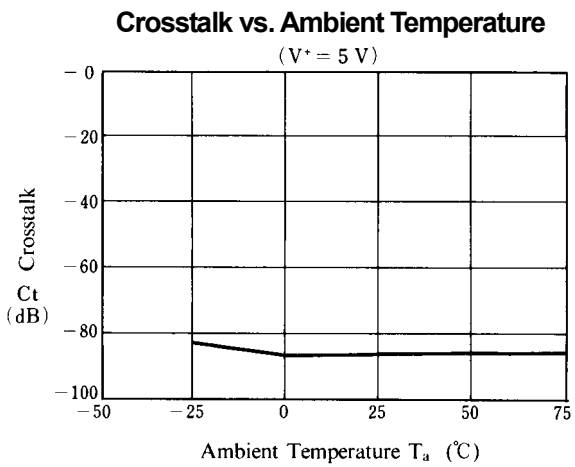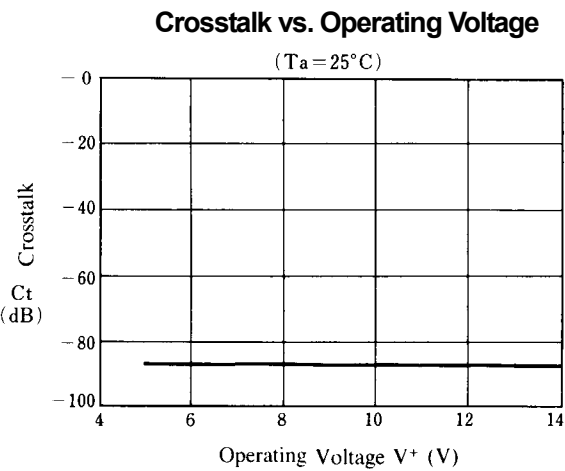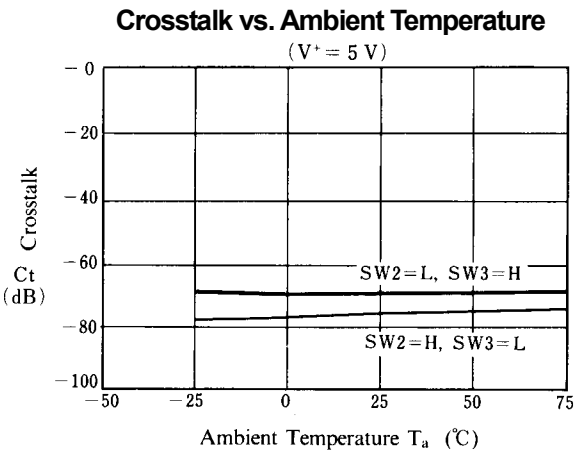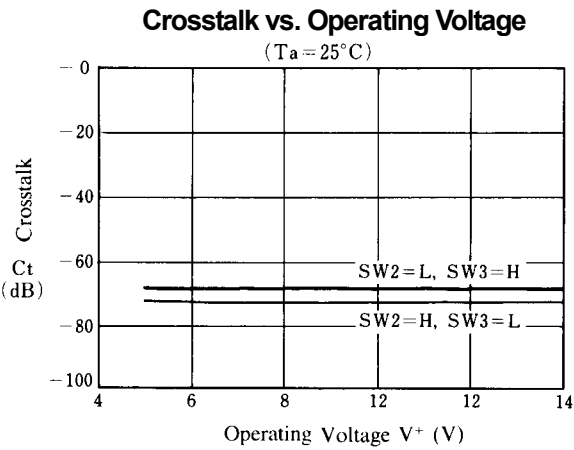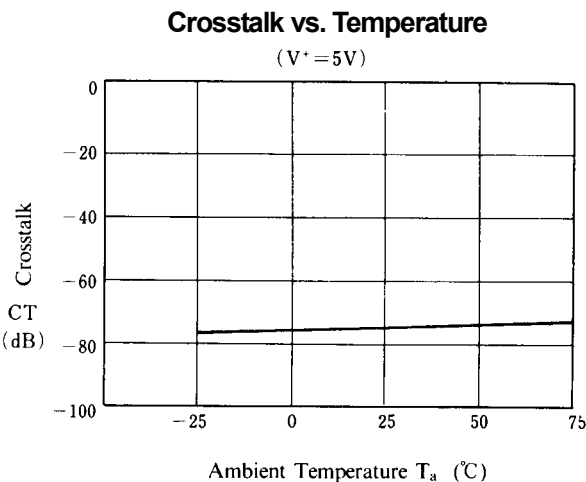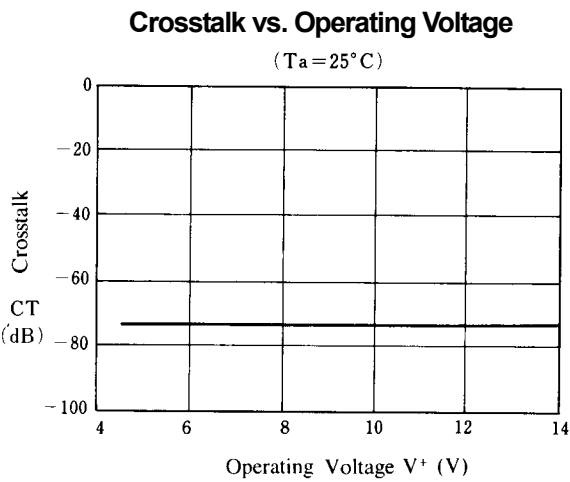


■ TYPICAL CHARACTERISTICS (Ta = +25°C)

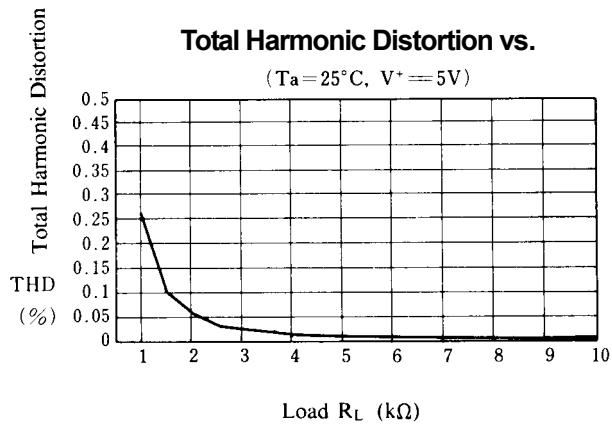


■ APPLICATION


This IC requires $1\text{M}\Omega$ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

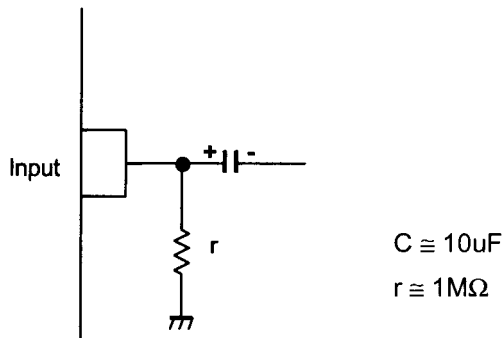

This IC requires $0.1\mu\text{F}$ capacitor between INPUT and GND, $1\text{M}\Omega$ resistance between INPUT and GND for clamp type input at mute mode.

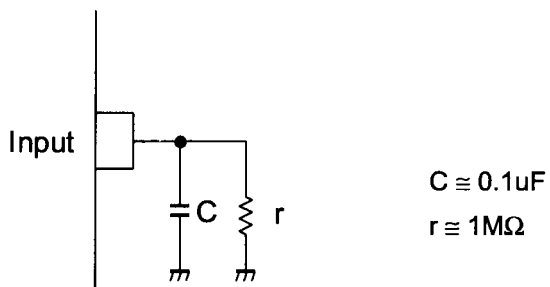

This IC requires $0.1\mu\text{F}$ capacitor between INPUT and GND for bias type input at mute mode.

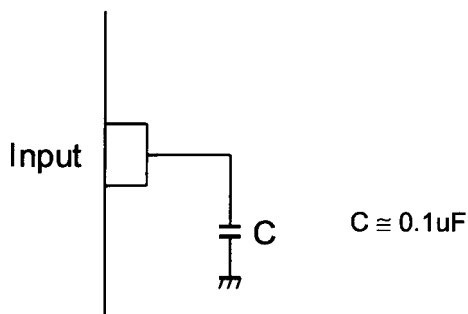

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2508M](#) [NJM2508V-TE1](#) [NJM2508M-TE2](#) [NJM2508M-TE1](#) [NJM2508M-T1](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331