


# High Precision Bulk Metal® Foil Surface Mount Current Sensing Chip Resistor with TCR of $\pm 2 \text{ ppm}/^\circ\text{C}$ and Load Life Stability of $\pm 0.02 \%$

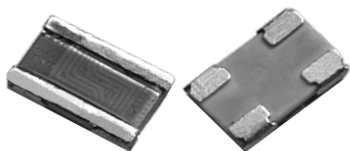


## INTRODUCTION

Model VCS1625 is a surface mount resistor designed with 4 pads for Kelvin connection. Utilizing Vishay Bulk Metal® foil as the resistance element, it provides performance capabilities far greater than other resistor technologies can supply in a product of comparable size.

This small device dissipates heat almost entirely through the pads so surface mount users are encouraged to be generous with the board's pads and traces. Gold terminations are available on special order.

Our application engineering department is available to advise and to make recommendations. For non standard technical requirements and special applications, please contact us.

**FIGURE 1 - POWER DERATING CURVE (1)**

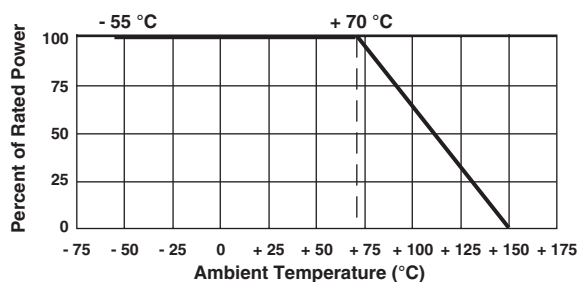

**Note**

(1) Power rating at + 70 °C: 0.5 W on FR4 PCB

## FEATURES

- Temperature coefficient of resistance (TCR):  $\pm 2.0 \text{ ppm}/^\circ\text{C}$  typical (- 55 °C to + 125 °C, + 25 °C ref.) (see table 1)
- Resistance range: 0.01  $\Omega$  to 10  $\Omega$  (for higher or lower values please contact us)
- Vishay Foil resistors are not restricted to standard values, we can supply specific "as required" values at no extra cost or delivery (e.g. 1.2345  $\Omega$  vs. 1  $\Omega$ )
- Tolerance: to  $\pm 0.1 \%$
- Load life stability:  $\pm 0.02 \%$  at 70 °C, 2000 h at rated power
- Electrostatic discharge (ESD) up to 25 000 V
- Short time overload  $\leq 0.005 \%$
- Non inductive, non capacitive design
- Power rating: 0.5 W at + 70 °C (figure 1) or 5 A, whichever is lower
- Thermal EMF: 0.05  $\mu\text{V}/^\circ\text{C}$  typical
- Non hot spot design
- Current noise: < - 40 dB
- Rise time: 1 ns effectively no ringing
- Voltage coefficient: < 0.1 ppm/V
- Non inductive: < 0.08  $\mu\text{H}$
- For better performances please review VCS1625Z (Z-foil) datasheet




**RoHS\***  
COMPLIANT

## TERMINATIONS

- Two lead (Pb)-free options are available: gold plated or tin plated
- Tin/lead plated

## APPLICATIONS




- Automatic test equipment (ATE)
- Airborne (in heads-up display systems)
- High precision instrumentation
- Electron beam recording equipment
- Electron microscopes
- Current sensing applications
- Forced balance electronic scales
- Applications that require superior frequency stability
- Military
- Medical



**TABLE 1 - TOLERANCE AND TCR VS. RESISTANCE VALUE (- 55 °C to + 125 °C, + 25° Ref.)**

| VALUE ( $\Omega$ ) | TOLERANCE         | TYPICAL TCR                        | MAXIMUM TCR                         |
|--------------------|-------------------|------------------------------------|-------------------------------------|
| > 2R000 to 10R000  | 0.2 %, 0.5 %, 1 % | $\pm 2 \text{ ppm}/^\circ\text{C}$ | $\pm 5 \text{ ppm}/^\circ\text{C}$  |
| > 0R500 to 2R000   | 0.5 %, 1 %        | $\pm 2 \text{ ppm}/^\circ\text{C}$ | $\pm 10 \text{ ppm}/^\circ\text{C}$ |
| > 0R100 to 0R500   | 1 %               | $\pm 2 \text{ ppm}/^\circ\text{C}$ | $\pm 15 \text{ ppm}/^\circ\text{C}$ |
| > 0R050 to 0R100   | 1 %               | $\pm 2 \text{ ppm}/^\circ\text{C}$ | $\pm 20 \text{ ppm}/^\circ\text{C}$ |
| > 0R030 to 0R050   | 1 %               | $\pm 2 \text{ ppm}/^\circ\text{C}$ | $\pm 30 \text{ ppm}/^\circ\text{C}$ |
| > 0R010 to 0R030   | 1 %               | $\pm 2 \text{ ppm}/^\circ\text{C}$ | $\pm 50 \text{ ppm}/^\circ\text{C}$ |

\* Pb containing materials are not RoHS compliant, exemptions may apply

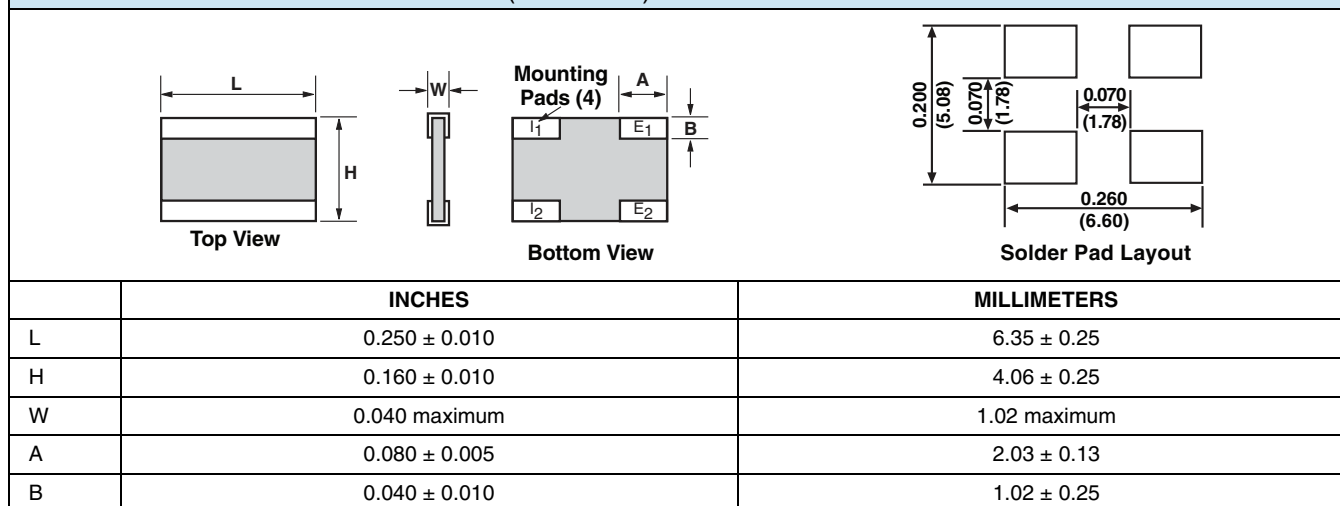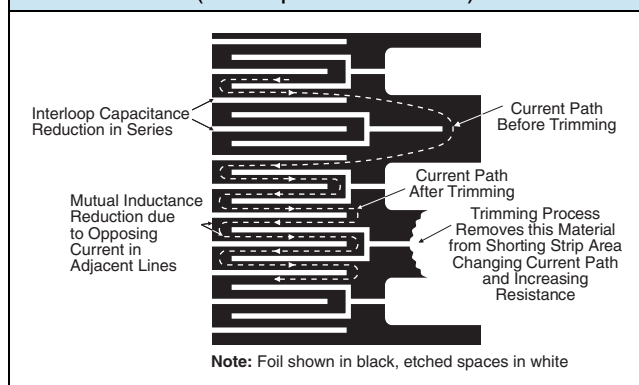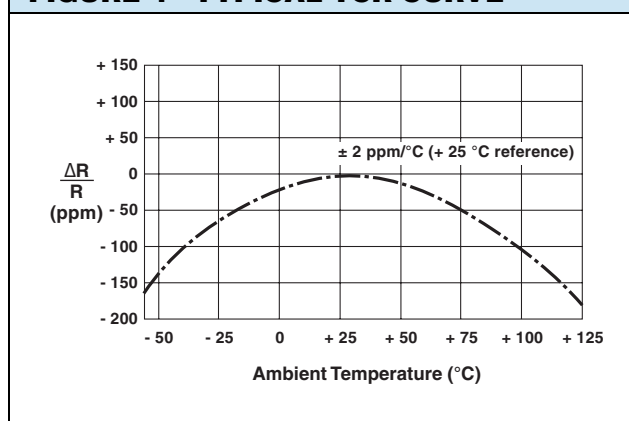**FIGURE 2 - DIMENSIONS** in Inches (Millimeters)**FIGURE 1 - TRIMMING TO VALUES**  
(Conceptual Illustration)**FIGURE 4 - TYPICAL TCR CURVE****TABLE 2 - PERFORMANCE SPECIFICATIONS**


| TEST                                                  | MIL-PRF-55342<br>ΔR LIMITS | TYPICAL<br>ΔR LIMITS | MAXIMUM<br>ΔR LIMITS |
|-------------------------------------------------------|----------------------------|----------------------|----------------------|
| Thermal Shock 5 x (- 65 °C to + 150 °C)               | ± 0.10 %                   | ± 0.005 % (50 ppm)   | ± 0.01 % (100 ppm)   |
| Low Temperature Operation                             | ± 0.10 %                   | ± 0.005 % (50 ppm)   | ± 0.01 % (100 ppm)   |
| Short Time Overload                                   | ± 0.10 %                   | ± 0.005 % (50 ppm)   | ± 0.02 % (200 ppm)   |
| High Temperature Exposure                             | ± 0.10 %                   | ± 0.01 % (100 ppm)   | ± 0.02 % (200 ppm)   |
| Resistance to Soldering Heat                          | ± 0.2 %                    | ± 0.01 % (100 ppm)   | ± 0.03 % (300 ppm)   |
| Moisture Resistance                                   | ± 0.20 %                   | ± 0.01 % (100 ppm)   | ± 0.03 % (300 ppm)   |
| Load Life 2000 h at 70 °C: Rated Power On Ceramic PCB | ± 0.5 %                    | ± 0.02 % (200 ppm)   | ± 0.04 % (400 ppm)   |

**Note**

- Measurement error 0.001R

**TABLE 3 - GLOBAL PART NUMBER INFORMATION**

**NEW GLOBAL PART NUMBER: Y08501R50500D9L (preferred part number format)**

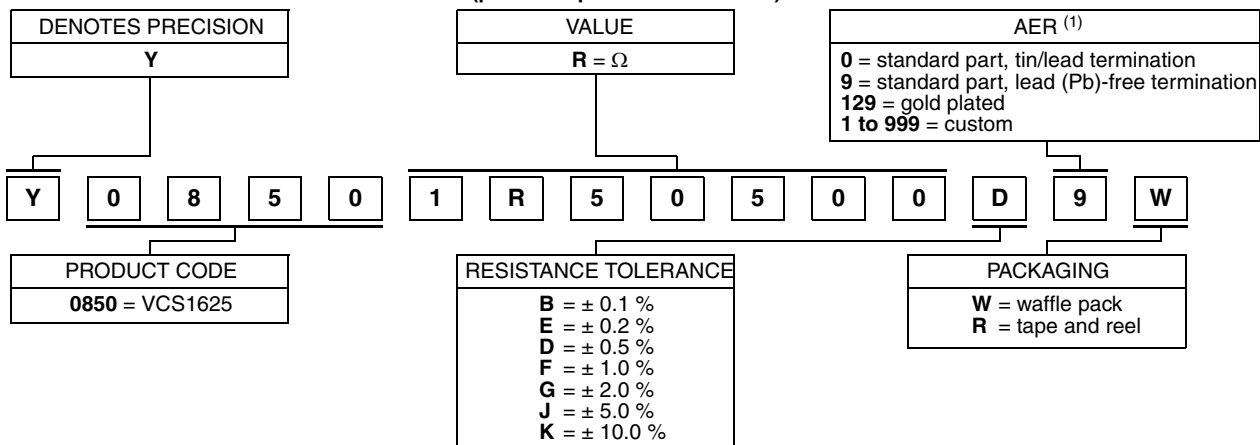

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0850 1R50500 D 9 W:

TYPE: VCS1625  
VALUES: 1.505  $\Omega$   
ABSOLUTE TOLERANCE:  $\pm 0.5\%$   
TERMINATION: tin plated (lead (Pb)-free)  
PACKAGING: bulk pack

**HISTORICAL PART NUMBER: VCS1625 1R5050 TCR2 D S W (will continue to be used)**

| VCS1625 | 1R50500        | TCR2                                   | D                                                                                                                                                                                   | S                                                                          | W                                                  |
|---------|----------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------|
| MODEL   | OHMIC VALUE    | TEMPERATURE COEFFICIENT CHARACTERISTIC | RESISTANCE TOLERANCE                                                                                                                                                                | TERMINATION                                                                | PACKAGING                                          |
| VCS1625 | 1.505 $\Omega$ |                                        | <b>B</b> = $\pm 0.1\%$<br><b>E</b> = $\pm 0.2\%$<br><b>D</b> = $\pm 0.5\%$<br><b>F</b> = $\pm 1.0\%$<br><b>G</b> = $\pm 2.0\%$<br><b>J</b> = $\pm 5.0\%$<br><b>K</b> = $\pm 10.0\%$ | <b>S</b> = lead (Pb)-free<br><b>B</b> = tin/lead<br><b>G</b> = gold plated | <b>W</b> = waffle pack<br><b>T</b> = tape and reel |

**Note**

<sup>(1)</sup> For non-standard requests or additional values, please contact application engineering.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331