



## Features

- Radial Leaded Devices
- Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirements
- RoHS compliant\*
- Agency recognition:   

## Applications

Almost anywhere there is a low voltage power supply and a load to be protected, including:

- Computers & peripherals
- General electronics
- Automotive applications

# MF-R Series - PTC Resettable Fuses

## Electrical Characteristics

| Model        | V max.<br>Volts | I max.<br>Amps | Ihold            | Itrip | Initial Resistance |       | 1 Hour (R <sub>1</sub> )<br>Post-Trip Resistance | Max. Time to Trip |                  | Tripped Power Dissipation |
|--------------|-----------------|----------------|------------------|-------|--------------------|-------|--------------------------------------------------|-------------------|------------------|---------------------------|
|              |                 |                | Amperes at 23 °C |       | Ohms at 23 °C      |       | Ohms at 23 °C                                    | Amperes at 23 °C  | Seconds at 23 °C | Watts at 23 °C            |
|              |                 |                | Hold             | Trip  | Min.               | Max.  | Max.                                             |                   |                  | Typ.                      |
| MF-R005**    | 60              | 40             | 0.05             | 0.10  | 7.3                | 11.1  | 22.0                                             | 0.5               | 5.0              | 0.22                      |
| MF-R010      | 60              | 40             | 0.10             | 0.20  | 2.50               | 4.50  | 7.50                                             | 0.5               | 4.0              | 0.38                      |
| MF-R017      | 60              | 40             | 0.17             | 0.34  | 2.00               | 3.20  | 8.00                                             | 0.85              | 3.0              | 0.48                      |
| MF-R020      | 60              | 40             | 0.20             | 0.40  | 1.50               | 2.84  | 4.40                                             | 1.0               | 2.2              | 0.40                      |
| MF-R025      | 60              | 40             | 0.25             | 0.50  | 1.00               | 1.95  | 3.00                                             | 1.25              | 2.5              | 0.45                      |
| MF-R030      | 60              | 40             | 0.30             | 0.60  | 0.76               | 1.36  | 2.10                                             | 1.5               | 3.0              | 0.50                      |
| MF-R040      | 60              | 40             | 0.40             | 0.80  | 0.52               | 0.86  | 1.29                                             | 2.0               | 3.8              | 0.55                      |
| MF-R050      | 60              | 40             | 0.50             | 1.00  | 0.41               | 0.77  | 1.17                                             | 2.5               | 4.0              | 0.75                      |
| MF-R065      | 60              | 40             | 0.65             | 1.30  | 0.27               | 0.48  | 0.72                                             | 3.25              | 5.3              | 0.90                      |
| MF-R075      | 60              | 40             | 0.75             | 1.50  | 0.18               | 0.40  | 0.60                                             | 3.75              | 6.3              | 0.90                      |
| MF-R090      | 60              | 40             | 0.90             | 1.80  | 0.14               | 0.31  | 0.47                                             | 4.5               | 7.2              | 1.00                      |
| MF-R090-0-9  | 30              | 40             | 0.90             | 1.80  | 0.07               | 0.12  | 0.22                                             | 4.5               | 5.9              | 0.60                      |
| MF-R110      | 30              | 40             | 1.10             | 2.20  | 0.10               | 0.18  | 0.27                                             | 5.5               | 6.6              | 0.70                      |
| MF-R135      | 30              | 40             | 1.35             | 2.70  | 0.065              | 0.115 | 0.17                                             | 6.75              | 7.3              | 0.80                      |
| MF-R160      | 30              | 40             | 1.60             | 3.20  | 0.055              | 0.105 | 0.15                                             | 8.0               | 8.0              | 0.90                      |
| MF-R185      | 30              | 40             | 1.85             | 3.70  | 0.040              | 0.07  | 0.11                                             | 9.25              | 8.7              | 1.00                      |
| MF-R250      | 30              | 40             | 2.50             | 5.00  | 0.025              | 0.048 | 0.07                                             | 12.5              | 10.3             | 1.20                      |
| MF-R250-0-10 | 30              | 40             | 2.50             | 5.00  | 0.025              | 0.048 | 0.07                                             | 12.5              | 10.3             | 1.20                      |
| MF-R300      | 30              | 40             | 3.00             | 6.00  | 0.020              | 0.05  | 0.08                                             | 15.0              | 10.8             | 2.00                      |
| MF-R400      | 30              | 40             | 4.00             | 8.00  | 0.010              | 0.03  | 0.05                                             | 20.0              | 12.7             | 2.50                      |
| MF-R500      | 30              | 40             | 5.00             | 10.00 | 0.010              | 0.03  | 0.05                                             | 25.0              | 14.5             | 3.00                      |
| MF-R600      | 30              | 40             | 6.00             | 12.00 | 0.005              | 0.02  | 0.04                                             | 30.0              | 16.0             | 3.50                      |
| MF-R700      | 30              | 40             | 7.00             | 14.00 | 0.005              | 0.02  | 0.03                                             | 35.0              | 17.5             | 3.80                      |
| MF-R800      | 30              | 40             | 8.00             | 16.00 | 0.005              | 0.02  | 0.03                                             | 40.0              | 18.8             | 4.00                      |
| MF-R900      | 30              | 40             | 9.00             | 18.00 | 0.005              | 0.01  | 0.02                                             | 45.0              | ***20.0          | 4.20                      |
| MF-R1100     | 16              | 100            | 11.00            | 22.00 | 0.003              | 0.01  | 0.014                                            | 40.0              | 20.0             | 4.50                      |

\*\*CSA approval pending.

\*\*\*Tested at 40 amps

## Environmental Characteristics

|                                                             |                                    |                                 |
|-------------------------------------------------------------|------------------------------------|---------------------------------|
| Operating/Storage Temperature.....                          | -40 °C to +85 °C                   |                                 |
| Maximum Device Surface Temperature<br>in Tripped State..... | 125 °C                             |                                 |
| Passive Aging .....                                         | +85 °C, 1000 hours.....            | ±5 % typical resistance change  |
| Humidity Aging .....                                        | +85 °C, 85 % R.H. 1000 hours.....  | ±5 % typical resistance change  |
| Thermal Shock .....                                         | -40 °C to +85 °C, 10 times .....   | ±10 % typical resistance change |
| Solvent Resistance.....                                     | MIL-STD-202, Method 215.....       | No change                       |
| Vibration .....                                             | MIL-STD-883C, Method 2007.1, ..... | No change                       |
|                                                             | Condition A                        |                                 |

## Test Procedures And Requirements For Model MF-R Series

| Test                 | Test Conditions                                            | Accept/Reject Criteria                  |
|----------------------|------------------------------------------------------------|-----------------------------------------|
| Visual/Mech.....     | Verify dimensions and materials .....                      | Per MF physical description             |
| Resistance.....      | In still air @ 23 °C.....                                  | R <sub>min</sub> ≤ R ≤ R <sub>max</sub> |
| Time to Trip.....    | 5 times I <sub>hold</sub> , V <sub>max</sub> , 23 °C ..... | T ≤ max. time to trip (seconds)         |
| Hold Current.....    | 30 min. at I <sub>hold</sub> .....                         | No trip                                 |
| Trip Cycle Life..... | V <sub>max</sub> , I <sub>max</sub> , 100 cycles.....      | No arcing or burning                    |
| Trip Endurance ..... | V <sub>max</sub> , 48 hours.....                           | No arcing or burning                    |

UL File Number ..... E 174545  
 CSA File Number ..... CA 110338  
 TÜV File Number ..... R2057213

\*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex.

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

## Additional Features

- Bulk packaging, tape and reel and Ammo-Pak available on most models

## MF-R Series - PTC Resettable Fuses

**BOURNS®**

Product Dimensions (see next page for outline drawing)

| Model        | A<br>Max.              | B<br>Max.              | C                      |                       | D<br>Min.             | E<br>Max.             | Physical Characteristics |                         |          |
|--------------|------------------------|------------------------|------------------------|-----------------------|-----------------------|-----------------------|--------------------------|-------------------------|----------|
|              |                        |                        | Nom.                   | Tol. ±                |                       |                       | Style                    | Lead Dia.               | Material |
| MF-R005      | $\frac{8.0}{(0.315)}$  | $\frac{8.3}{(0.327)}$  | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 4                        | $\frac{0.405}{(0.016)}$ | Sn/NiCu  |
| MF-R010      | $\frac{7.4}{(0.291)}$  | $\frac{12.7}{(0.5)}$   | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/NiCu  |
| MF-R017      | $\frac{7.4}{(0.291)}$  | $\frac{12.7}{(0.5)}$   | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/CuFe  |
| MF-R020      | $\frac{7.4}{(0.291)}$  | $\frac{12.7}{(0.5)}$   | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/CuFe  |
| MF-R025      | $\frac{7.4}{(0.291)}$  | $\frac{12.7}{(0.5)}$   | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/CuFe  |
| MF-R030      | $\frac{7.4}{(0.291)}$  | $\frac{13.4}{(0.528)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/CuFe  |
| MF-R040      | $\frac{7.4}{(0.291)}$  | $\frac{13.7}{(0.539)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/CuFe  |
| MF-R050      | $\frac{7.9}{(0.311)}$  | $\frac{13.7}{(0.539)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R065      | $\frac{9.7}{(0.382)}$  | $\frac{15.2}{(0.598)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R075      | $\frac{10.4}{(0.409)}$ | $\frac{16.0}{(0.630)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R090      | $\frac{11.7}{(0.461)}$ | $\frac{16.7}{(0.657)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.1}{(0.122)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R090-0-9  | $\frac{7.4}{(0.291)}$  | $\frac{12.2}{(0.480)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 3                        | $\frac{0.51}{(0.020)}$  | Sn/CuFe  |
| MF-R110      | $\frac{8.9}{(0.350)}$  | $\frac{14.0}{(0.551)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R135      | $\frac{8.9}{(0.350)}$  | $\frac{18.9}{(0.744)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R160      | $\frac{10.2}{(0.402)}$ | $\frac{16.8}{(0.661)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R185      | $\frac{12.0}{(0.472)}$ | $\frac{18.4}{(0.724)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 1                        | $\frac{0.51}{(0.020)}$  | Sn/Cu    |
| MF-R250      | $\frac{12.0}{(0.472)}$ | $\frac{18.3}{(0.720)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R250-0-10 | $\frac{12.0}{(0.472)}$ | $\frac{18.3}{(0.720)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 3                        | $\frac{0.51}{(0.020)}$  | Sn/CuFe  |
| MF-R300      | $\frac{12.0}{(0.472)}$ | $\frac{18.3}{(0.720)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R400      | $\frac{14.4}{(0.567)}$ | $\frac{24.8}{(0.976)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R500      | $\frac{17.4}{(0.685)}$ | $\frac{24.9}{(0.980)}$ | $\frac{10.2}{(0.402)}$ | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R600      | $\frac{19.3}{(0.760)}$ | $\frac{31.9}{(1.256)}$ | $\frac{10.2}{(0.402)}$ | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R700      | $\frac{22.1}{(0.870)}$ | $\frac{29.8}{(1.173)}$ | $\frac{10.2}{(0.402)}$ | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R800      | $\frac{24.2}{(0.953)}$ | $\frac{32.9}{(1.295)}$ | $\frac{10.2}{(0.402)}$ | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R900      | $\frac{24.2}{(0.953)}$ | $\frac{32.9}{(1.295)}$ | $\frac{10.2}{(0.402)}$ | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |
| MF-R1100     | $\frac{24.2}{(0.953)}$ | $\frac{32.9}{(1.295)}$ | $\frac{10.2}{(0.402)}$ | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.299)}$ | $\frac{3.0}{(0.118)}$ | 2                        | $\frac{0.81}{(0.032)}$  | Sn/Cu    |

Packaging options: BULK: All models = 500 pcs. per bag.  
 TAPE & REEL: MF-R005-MF-R160 - 12.7 mm device pitch = 3000 pcs. per reel;  
 MF-R185-MF-R400 - 25.4mm device pitch = 1500 pcs. per reel; MF-R250-0-10 = 1500 pcs. per reel.  
 AMMO-PACK: MF-R005-MF-R160 - 12.7 mm device pitch = 2000 pcs. per reel;  
 MF-R185-MF-R400 - 25.4 mm device pitch = 1000 pcs. per reel; MF-R090-0-9 & MF-R250-0-10 =  
 2000 pcs. per reel.

0.405 (26AWG)  
 0.51 (24AWG)  
 0.81 (20AWG)

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$


Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.

# MF-R Series - PTC Resettable Fuses


**BOURNS®**

## Product Dimensions (see previous page for dimensions)

Style 1

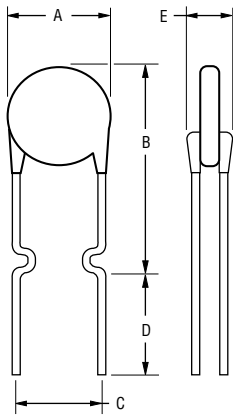


Style 2

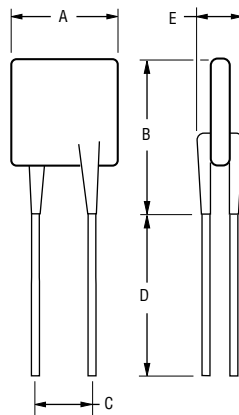


NOTE: Kinked lead option is available for board standoff. Contact factory for details.

Style 3

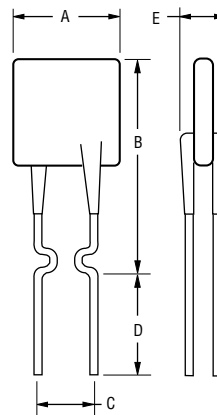

NOTE: Also available with straight leads. Contact factory for details.

Style 4



## Thermal Derating Chart - I<sub>hold</sub> / I<sub>trip</sub> (Amps)



| Model        | Ambient Operating Temperature |             |             |             |             |             |             |             |             |
|--------------|-------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|              | -40 °C                        | -20 °C      | 0 °C        | 23 °C       | 40 °C       | 50 °C       | 60 °C       | 70 °C       | 85 °C       |
| MF-R005      | 0.08 / 0.16                   | 0.07 / 0.14 | 0.06 / 0.12 | 0.05 / 0.10 | 0.04 / 0.08 | 0.04 / 0.08 | 0.03 / 0.07 | 0.03 / 0.07 | 0.02 / 0.05 |
| MF-R010      | 0.16 / 0.32                   | 0.14 / 0.28 | 0.12 / 0.24 | 0.10 / 0.20 | 0.08 / 0.16 | 0.07 / 0.14 | 0.06 / 0.12 | 0.05 / 0.10 | 0.04 / 0.08 |
| MF-R017      | 0.26 / 0.52                   | 0.23 / 0.46 | 0.20 / 0.40 | 0.17 / 0.34 | 0.14 / 0.28 | 0.12 / 0.24 | 0.11 / 0.22 | 0.09 / 0.18 | 0.07 / 0.14 |
| MF-R020      | 0.31 / 0.62                   | 0.27 / 0.54 | 0.24 / 0.48 | 0.20 / 0.40 | 0.16 / 0.32 | 0.14 / 0.28 | 0.13 / 0.26 | 0.11 / 0.22 | 0.08 / 0.16 |
| MF-R025      | 0.39 / 0.78                   | 0.34 / 0.68 | 0.30 / 0.60 | 0.25 / 0.50 | 0.20 / 0.40 | 0.18 / 0.36 | 0.16 / 0.32 | 0.14 / 0.28 | 0.10 / 0.20 |
| MF-R030      | 0.47 / 0.94                   | 0.41 / 0.82 | 0.36 / 0.72 | 0.30 / 0.60 | 0.24 / 0.48 | 0.22 / 0.44 | 0.19 / 0.38 | 0.16 / 0.32 | 0.12 / 0.24 |
| MF-R040      | 0.62 / 1.24                   | 0.54 / 1.08 | 0.48 / 0.96 | 0.40 / 0.80 | 0.32 / 0.64 | 0.29 / 0.58 | 0.25 / 0.50 | 0.22 / 0.44 | 0.16 / 0.32 |
| MF-R050      | 0.78 / 1.56                   | 0.68 / 1.36 | 0.60 / 1.20 | 0.50 / 1.00 | 0.41 / 0.82 | 0.36 / 0.72 | 0.32 / 0.64 | 0.27 / 0.54 | 0.20 / 0.40 |
| MF-R065      | 1.01 / 2.02                   | 0.88 / 1.76 | 0.77 / 1.54 | 0.65 / 1.30 | 0.53 / 1.06 | 0.47 / 0.94 | 0.41 / 0.82 | 0.35 / 0.70 | 0.26 / 0.52 |
| MF-R075      | 1.16 / 2.32                   | 1.02 / 2.04 | 0.89 / 1.78 | 0.75 / 1.50 | 0.61 / 1.22 | 0.54 / 1.08 | 0.47 / 0.94 | 0.41 / 0.82 | 0.30 / 0.60 |
| MF-R090      | 1.40 / 2.80                   | 1.22 / 2.44 | 1.07 / 2.14 | 0.90 / 1.80 | 0.73 / 1.46 | 0.65 / 1.30 | 0.57 / 1.14 | 0.49 / 0.98 | 0.36 / 0.72 |
| MF-R090-0-9  | 1.40 / 2.80                   | 1.22 / 2.44 | 1.07 / 2.14 | 0.90 / 1.80 | 0.73 / 1.46 | 0.65 / 1.30 | 0.57 / 1.14 | 0.49 / 0.98 | 0.36 / 0.72 |
| MF-R110      | 1.60 / 3.20                   | 1.43 / 2.86 | 1.27 / 2.54 | 1.10 / 2.20 | 0.91 / 1.82 | 0.85 / 1.70 | 0.75 / 1.50 | 0.67 / 1.34 | 0.57 / 1.14 |
| MF-R135      | 1.96 / 3.92                   | 1.76 / 3.52 | 1.55 / 3.10 | 1.35 / 2.70 | 1.12 / 2.24 | 1.04 / 2.08 | 0.92 / 1.84 | 0.82 / 1.64 | 0.70 / 1.40 |
| MF-R160      | 2.32 / 4.64                   | 2.08 / 4.16 | 1.84 / 3.68 | 1.60 / 3.20 | 1.33 / 2.66 | 1.23 / 2.46 | 1.09 / 2.18 | 0.98 / 1.96 | 0.83 / 1.66 |
| MF-R185      | 2.68 / 5.36                   | 2.41 / 4.82 | 2.13 / 4.26 | 1.85 / 3.70 | 1.54 / 3.08 | 1.42 / 2.84 | 1.26 / 2.52 | 1.13 / 2.26 | 0.96 / 1.92 |
| MF-R250      | 3.63 / 7.26                   | 3.25 / 6.50 | 2.88 / 5.76 | 2.50 / 5.00 | 2.08 / 4.16 | 1.93 / 3.86 | 1.70 / 3.40 | 1.53 / 3.06 | 1.30 / 2.60 |
| MF-R250-0-10 | 3.63 / 7.26                   | 3.25 / 6.50 | 2.88 / 5.76 | 2.50 / 5.00 | 2.08 / 4.16 | 1.93 / 3.86 | 1.70 / 3.40 | 1.53 / 3.06 | 1.30 / 2.60 |
| MF-R300      | 4.35 / 8.70                   | 3.90 / 7.80 | 3.45 / 6.90 | 3.00 / 6.00 | 2.49 / 4.98 | 2.31 / 4.62 | 2.04 / 4.08 | 1.83 / 3.66 | 1.56 / 3.12 |
| MF-R400      | 5.80 / 11.6                   | 5.20 / 10.4 | 4.60 / 9.20 | 4.00 / 8.00 | 3.32 / 6.64 | 3.08 / 6.16 | 2.72 / 5.44 | 2.44 / 4.88 | 2.08 / 4.16 |
| MF-R500      | 7.25 / 14.5                   | 6.50 / 13.0 | 5.75 / 11.5 | 5.00 / 10.0 | 4.15 / 8.30 | 3.85 / 7.70 | 3.40 / 6.80 | 3.05 / 6.10 | 2.60 / 5.20 |
| MF-R600      | 8.70 / 17.4                   | 7.80 / 15.6 | 6.90 / 13.8 | 6.00 / 12.0 | 4.98 / 9.96 | 4.62 / 9.24 | 4.08 / 8.16 | 3.66 / 7.32 | 3.12 / 6.24 |
| MF-R700      | 10.1 / 20.3                   | 9.10 / 18.2 | 8.05 / 16.1 | 7.00 / 14.0 | 5.81 / 11.6 | 5.39 / 10.7 | 4.76 / 9.52 | 4.27 / 9.44 | 3.64 / 7.28 |
| MF-R800      | 11.6 / 23.2                   | 10.4 / 20.8 | 9.20 / 18.4 | 8.00 / 16.0 | 6.64 / 13.2 | 6.16 / 12.3 | 5.44 / 10.8 | 4.88 / 9.76 | 4.16 / 8.32 |
| MF-R900      | 13.0 / 26.1                   | 11.7 / 23.4 | 10.3 / 20.7 | 9.00 / 18.0 | 7.47 / 14.9 | 6.93 / 12.7 | 6.12 / 12.2 | 5.49 / 10.9 | 4.68 / 9.36 |
| MF-R1100     | 16.1 / 32.0                   | 14.6 / 29.2 | 13.1 / 26.2 | 11.0 / 22.1 | 9.40 / 18.4 | 8.80 / 17.6 | 7.80 / 15.6 | 6.90 / 13.8 | 5.20 / 10.4 |

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

# MF-R Series - PTC Resettable Fuses

**BOURNS®**

## Typical Time to Trip at 23 °C

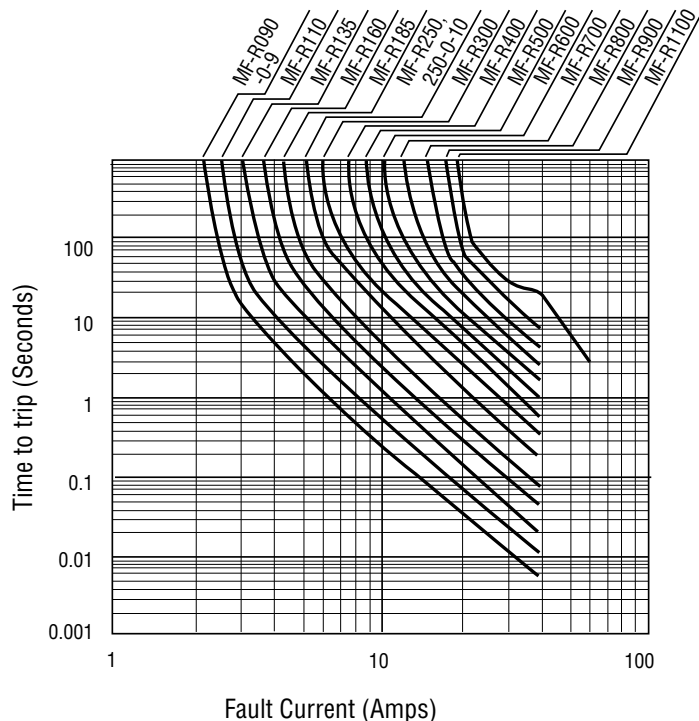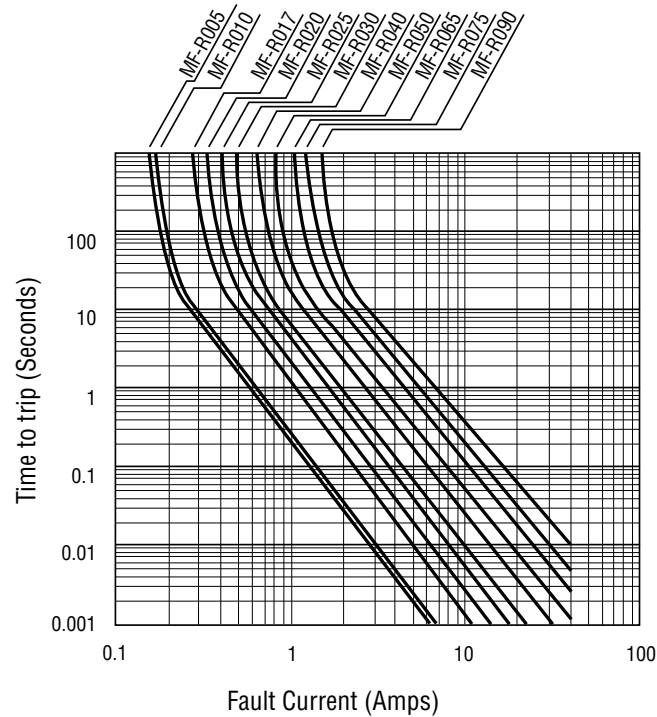

## How to Order

**MF - R 110 - 0 - 99**

- Multifuse®  
Product Designator
- Series  
R = Radial Leaded Component
- Hold Current, I<sub>hold</sub>  
005-1100 (0.05 Amps - 11.0 Amps)
- Packaging Options
- = Bulk Packaging without part number suffix option
  - 0-99 = Bulk Packaging with part number suffix option
  - 2 = Tape and Reel without part number suffix option\*
  - 2-99 = Tape and Reel with part number suffix option
  - AP = Ammo-Pak\*
  - 0-14 = Kinked leads where straight leads are standard
  - 0-17 = Straight leads where kinked leads are standard
- Part Number Suffix Option
- 99 = As of date code April 1, 2005 all MF-R models are RoHS compliant. The suffix "-99" can be used if a new part number is required to reference the RoHS compliance.
- Examples:
- MF-R110 ..... Bulk packaging
  - MF-R110-0-99 ..... Bulk packaging with part number suffix option
  - MF-R110-2 ..... Tape and reel packaging
  - MF-R110-2-99 ..... Tape and reel packaging with part number suffix option
  - MF-R090-0-9-99 ..... Bulk packaging with part number suffix option
  - MF-R250-0-10-99 ..... Bulk packaging with part number suffix option

\*Packaged per EIA486-B


## Typical Part Marking: MF-R005 - R025

Represents total content. Layout may vary.



## Typical Part Marking: MF-R030 - R1100

Represents total content. Layout may vary.

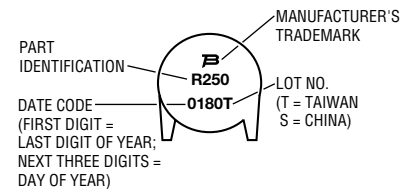

MF-R SERIES, REV. Y, 05/11

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

# MF-R, MF-R/90, MF-R/600, MF-RX, MF-RX/72 & MF-RX/250 Series Tape and Reel Specifications

**BOURNS®**

Devices taped using EIA468-B/IEC286-2 standards. See table below and Figures 1 and 2 for details.

| Dimension Description                                                                                | IEC Mark   | EIA Mark   | Dimensions             |                                    |
|------------------------------------------------------------------------------------------------------|------------|------------|------------------------|------------------------------------|
|                                                                                                      |            |            | Dimensions             | Tolerance                          |
| Carrier tape width                                                                                   | $W$        | $W$        | $\frac{18}{(.709)}$    | $\frac{-0.5/+1.0}{(-0.02/+0.039)}$ |
| Hold down tape width                                                                                 | $W_0$      | $W_4$      | $\frac{11}{(.433)}$    | min.                               |
| Hold down tape                                                                                       |            |            | No protrusion          |                                    |
| Top distance between tape edges                                                                      | $W_2$      | $W_6$      | $\frac{3}{(.118)}$     | max.                               |
| Sprocket hole position                                                                               | $W_1$      | $W_5$      | $\frac{9}{(.354)}$     | $\frac{-0.5/+0.75}{(-0.02/+0.03)}$ |
| Sprocket hole diameter                                                                               | $D_0$      | $D_0$      | $\frac{4}{(.157)}$     | $\frac{\pm 0.2}{(\pm .0078)}$      |
| Abscissa to plane (straight lead)                                                                    | $H$        | $H$        | $\frac{18.5}{(.728)}$  | $\frac{\pm 3.0}{(\pm .118)}$       |
| Abscissa to plane (kinked lead)                                                                      | $H_0$      | $H_0$      | $\frac{16}{(.63)}$     | $\frac{\pm 0.5}{(\pm .02)}$        |
| Abscissa to top (straight lead)                                                                      | $H_1$      | $H_1$      | $\frac{38.0}{(1.496)}$ | max.                               |
| Abscissa to top (kinked lead)                                                                        | $H_1$      | $H_1$      | $\frac{32.2}{(1.268)}$ | max.                               |
| Overall width w/lead protrusion (straight lead)                                                      |            | $C_1$      | $\frac{55.0}{(2.165)}$ | max.                               |
| Overall width w/lead protrusion (kinked lead)                                                        |            | $C_1$      | $\frac{43.2}{(1.7)}$   | max.                               |
| Overall width w/o lead protrusion (straight lead)                                                    |            | $C_2$      | $\frac{54.0}{(2.126)}$ | max.                               |
| Overall width w/o lead protrusion (kinked lead)                                                      |            | $C_2$      | $\frac{42.5}{(1.673)}$ | max.                               |
| Lead protrusion                                                                                      | $I_1$      | $L_1$      | $\frac{1.0}{(.039)}$   | max.                               |
| Protrusion of cutout                                                                                 | $L$        | $L$        | $\frac{11}{(.433)}$    | max.                               |
| Protrusion beyond hold-down tape                                                                     | $I_2$      | $I_2$      | Not specified          |                                    |
| Sprocket hole pitch                                                                                  | $P_0$      | $P_0$      | $\frac{12.7}{(0.5)}$   | $\frac{\pm 0.3}{(\pm .012)}$       |
| Pitch tolerance                                                                                      |            |            | 20 consecutive         | $\frac{\pm 1}{(\pm .039)}$         |
| Device pitch: MF-R005–MF-R160, MF-R/90,<br>MF-RX110/72–MF-RX185/72                                   |            |            | $\frac{12.7}{(0.5)}$   | $\frac{\pm 0.3}{(\pm .012)}$       |
| Device pitch: MF-R185–MF-R400, MF-RX110–MF-RX375<br>MF-R/600, MF-RX250/72–MF-RX375/72                |            |            | $\frac{25.4}{(1.0)}$   | $\frac{\pm 0.6}{(\pm .024)}$       |
| Tape thickness                                                                                       | $t$        | $t$        | $\frac{0.9}{(.035)}$   | max.                               |
| Tape thickness with splice: MF-R010–MF-R160,<br>MF-RX110/72–MF-RX185/72                              |            | $t_1$      | $\frac{1.5}{(.059)}$   | max.                               |
| Tape thickness with splice: MF-R250–MF-R1100,<br>MF-RX110–MF-RX375, MF-R/90, MF-RX250/72–MF-RX375/72 |            | $t_1$      | $\frac{2.3}{(.091)}$   | max.                               |
| Splice sprocket hole alignment                                                                       |            |            | 0                      | $\frac{\pm 0.3}{(\pm .012)}$       |
| Body lateral deviation                                                                               | $\Delta_h$ | $\Delta_h$ | 0                      | $\frac{\pm 1.0}{(\pm .039)}$       |
| Body tape plane deviation                                                                            | $\Delta_p$ | $\Delta_p$ | 0                      | $\frac{\pm 1.3}{(\pm .051)}$       |

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.


DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

# MF-R, MF-R/90, MF-R/600, MF-RX, MF-RX/72 & MF-RX/250 Series Tape and Reel Specifications


**BOURNS®**

| Dimension Description                                  | IEC Mark              | EIA Mark              | Dimensions                                                     |                                    |
|--------------------------------------------------------|-----------------------|-----------------------|----------------------------------------------------------------|------------------------------------|
|                                                        |                       |                       | Dimensions                                                     | Tolerance                          |
| Lead spacing: MF-R, MF-R/90, MF-R/600, MF-RX, MF-RX/72 | <i>F</i>              | <i>F</i>              | $\frac{5.08}{(0.2)}$                                           | $\frac{\pm 0.2}{(\pm 0.008)}$      |
| Lead spacing: MF-RX/250                                | <i>F</i>              | <i>F</i>              | $\frac{5.08}{(0.2)}$                                           | $\frac{-0.5/+0.6}{(-.020/+0.024)}$ |
| Reel width                                             | <i>w</i>              | <i>W</i> <sub>2</sub> | $\frac{56.0}{(2.205)}$                                         | max.                               |
| Reel diameter                                          | <i>d</i>              | <i>a</i>              | $\frac{370.0}{(14.57)}$                                        | max.                               |
| Space between flanges less device                      | <i>W</i> <sub>1</sub> | <i>h</i>              | $\frac{4.75}{(.187)}$                                          | $\frac{\pm 3.25}{(\pm .128)}$      |
| Arbor hole diameter                                    | <i>f</i>              | <i>c</i>              | $\frac{26.0}{(1.024)}$                                         | $\frac{\pm 12.0}{(\pm .472)}$      |
| Core diameter: MF-R, MF-RX, MF-R/90                    | <i>h</i>              | <i>n</i>              | $\frac{80}{(3.15)}$                                            | max.                               |
| Core diameter: MF-RX/250, MF-R/600                     | <i>h</i>              | <i>n</i>              | $\frac{91}{(3.58)}$                                            | max.                               |
| Box: MF-R, MF-RX, MF-R/90                              |                       |                       | $\frac{56}{(2.2)}$ $\frac{372}{(14.6)}$ $\frac{372}{(14.6)}$   | max.                               |
| Box: MF-RX/250                                         |                       |                       | $\frac{67}{(2.64)}$ $\frac{372}{(14.6)}$ $\frac{362}{(14.25)}$ | max.                               |
| Box: MF-R/600                                          |                       |                       | $\frac{64}{(2.52)}$ $\frac{372}{(14.6)}$ $\frac{362}{(14.25)}$ | max.                               |
| Consecutive missing places: MF-R, MF-RX, MF-R/90       |                       |                       | 3                                                              | max.                               |
| Consecutive missing places: MF-RX/250, MF-R/600        |                       |                       | none                                                           |                                    |
| Empty places per reel: MF-R, MF-RX, MF-R/90            |                       |                       | Not specified                                                  |                                    |
| Empty places per reel: MF-RX/250, MF-R/600             |                       |                       | 0.1 %                                                          |                                    |

**Taped Component Dimensions - Figure 1**

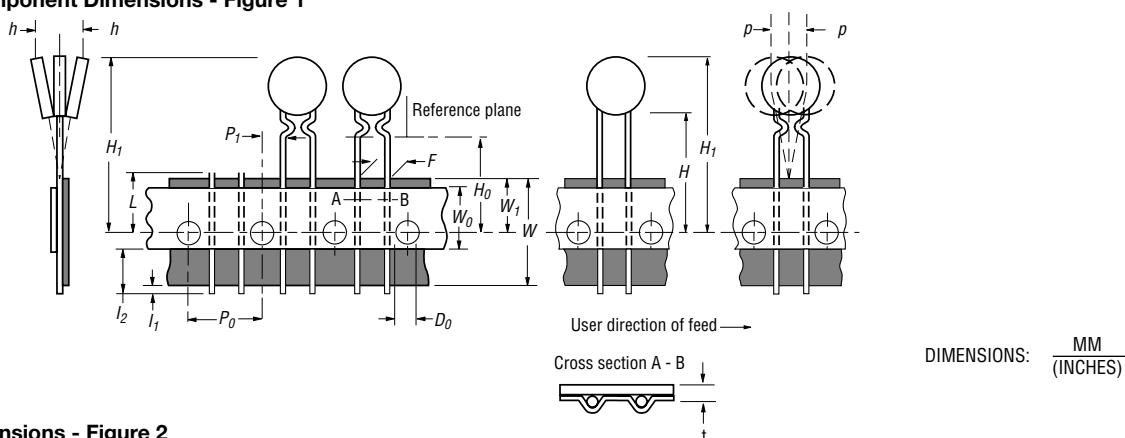

**Reel Dimensions - Figure 2**

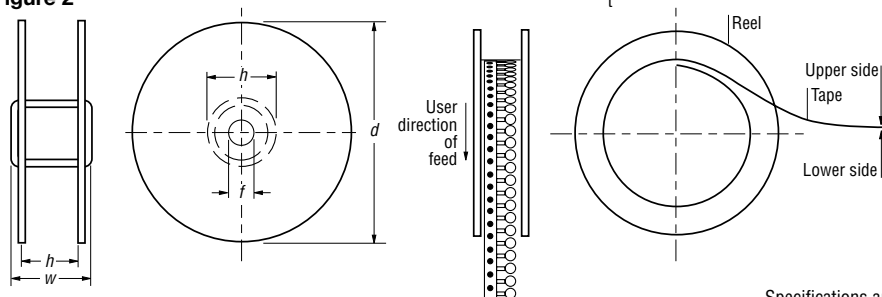

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331