


LOC	DIST	REVISIONS						
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			6	REVISED PER ECO-12-003841	14MAR2012	TY	KS	
			7	REVISED PER ECO-12-005533	05APR2012	JY	AC	
			A	REVISED PER ECR-13-019963	5NOV2013	RG	MC	
			B	REVISED PER ECO-14-016878	30EC2014	RG	MC	



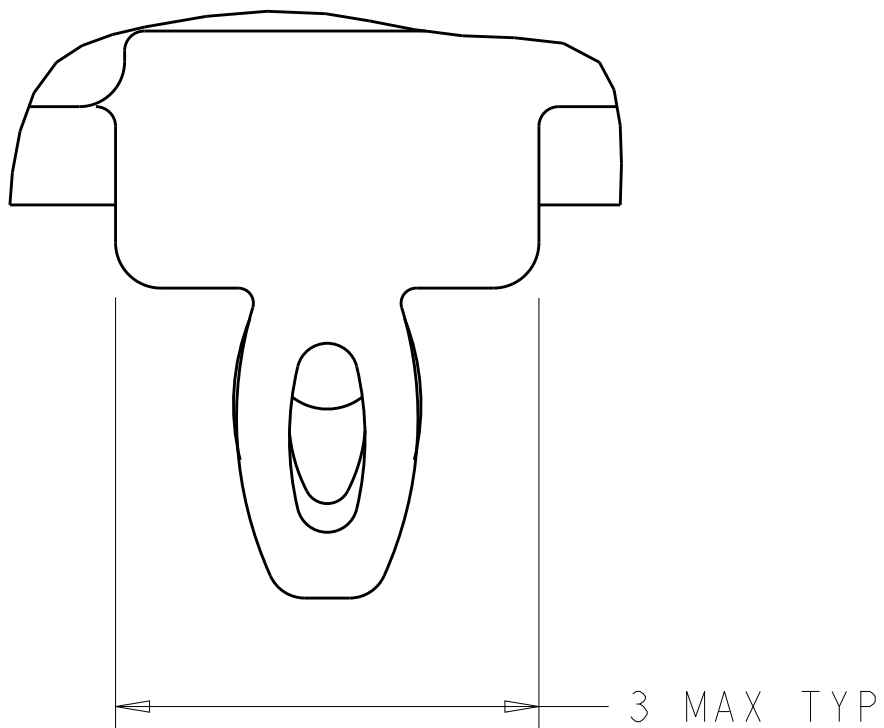


DETAIL S
SCALE 20:1




- 1 CAGE ASSEMBLY MATERIAL: NICKEL SILVER, 0.25 THICK
HEAT SINK MATERIAL: ALUMINUM
HEAT SINK CLIP MATERIAL: STAINLESS STEEL
EMI SPRING MATERIAL: COPPER ALLOY
FRONT FLANGE MATERIAL: ZINC ALLOY
LIGHT PIPE MATERIAL: CLEAR POLYCARBONATE
- 2 PITCH BETWEEN PORTS OF ONE 1X6 CAGE ASSEMBLY.
- 3 SPACING BETWEEN CAGES ON THE SAME PC BOARD, TO BE SPECIFIED BY CUSTOMER, MUST COMPLY WITH MINIMUM DIMENSIONS SHOWN.
- 4 REFERENCE APPLICATION SPEC 114-13218 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 DIMENSION F IS THE NOMINAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD,
SINGLE SIDED PC BOARD MINIMUM THICKNESS = 1.45mm
DOUBLE SIDED PC BOARD MINIMUM THICKNESS = 2.2mm PER QSFP.
- 7 HEAT SINKS, LIGHT PIPES, AND HEAT SINK CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED.
- 8 DATUM A IS TOP SURFACE OF PC BOARD.
- 9 DIMENSION APPLIES WITH MODULE INSERTED IN CAGE.
- 10 UNPLATED THRU HOLE.

- 15 REFERENCE APP SPEC 114-13218 FOR GASKET THICKNESS CALCULATION.
- 16 EMI SPRING FINISH: 2um MINIMUM TIN
FRONT FLANGE FINISH: 3um MINIMUM TIN OVER 1.27um MINIMUM NICKEL OVER 5.08um MINIMUM COPPER.
HEAT SINK FINISH: BLACK ANODIZED
- 17 HEAT SINKS AND CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED. LIGHT PIPES, SHIPPED UNATTACHED, MUST BE ASSEMBLED BY CUSTOMER AFTER THE CAGE IS SEATED IN THE PCB.
- 18 ROUND LIGHT PIPES PLEASE SEE SHEET 4/6

- 11. MATES WITH QSFP MSA COMPATIBLE TRANSCEIVER.
- 12 SURFACE TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE CAGE STANDOFFS, SHOWN IN DETAIL S, CONTACT PC BOARD.
- 13 BASELINE FOR THESE DIMENSIONS IS THE CENTER OF COMPLIANT PIN HOLE.
- 14 2D BARCODE AND DATE CODE (YYWWDD) MARKED ON SIDE OF CAGE ASSEMBLY.

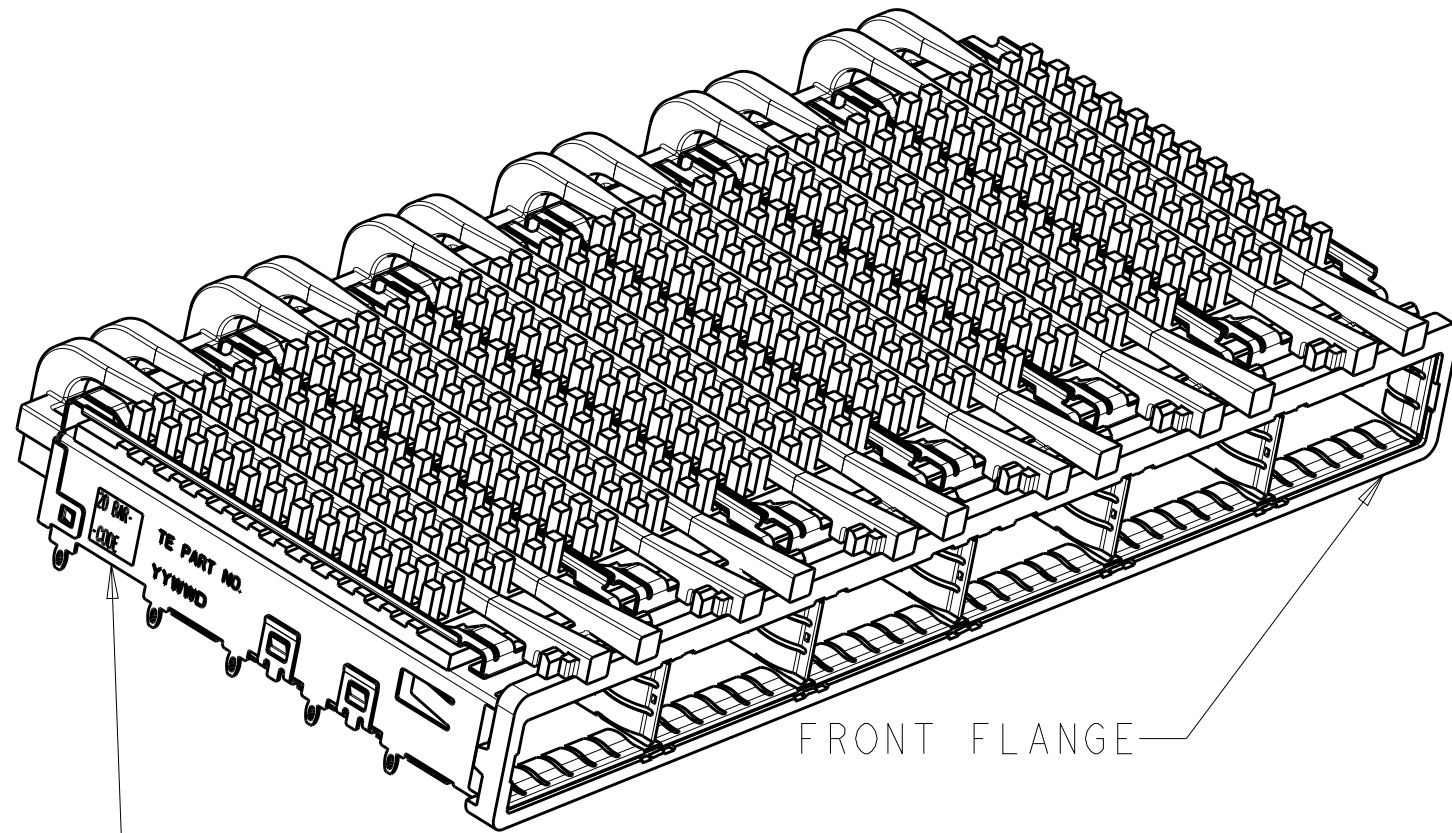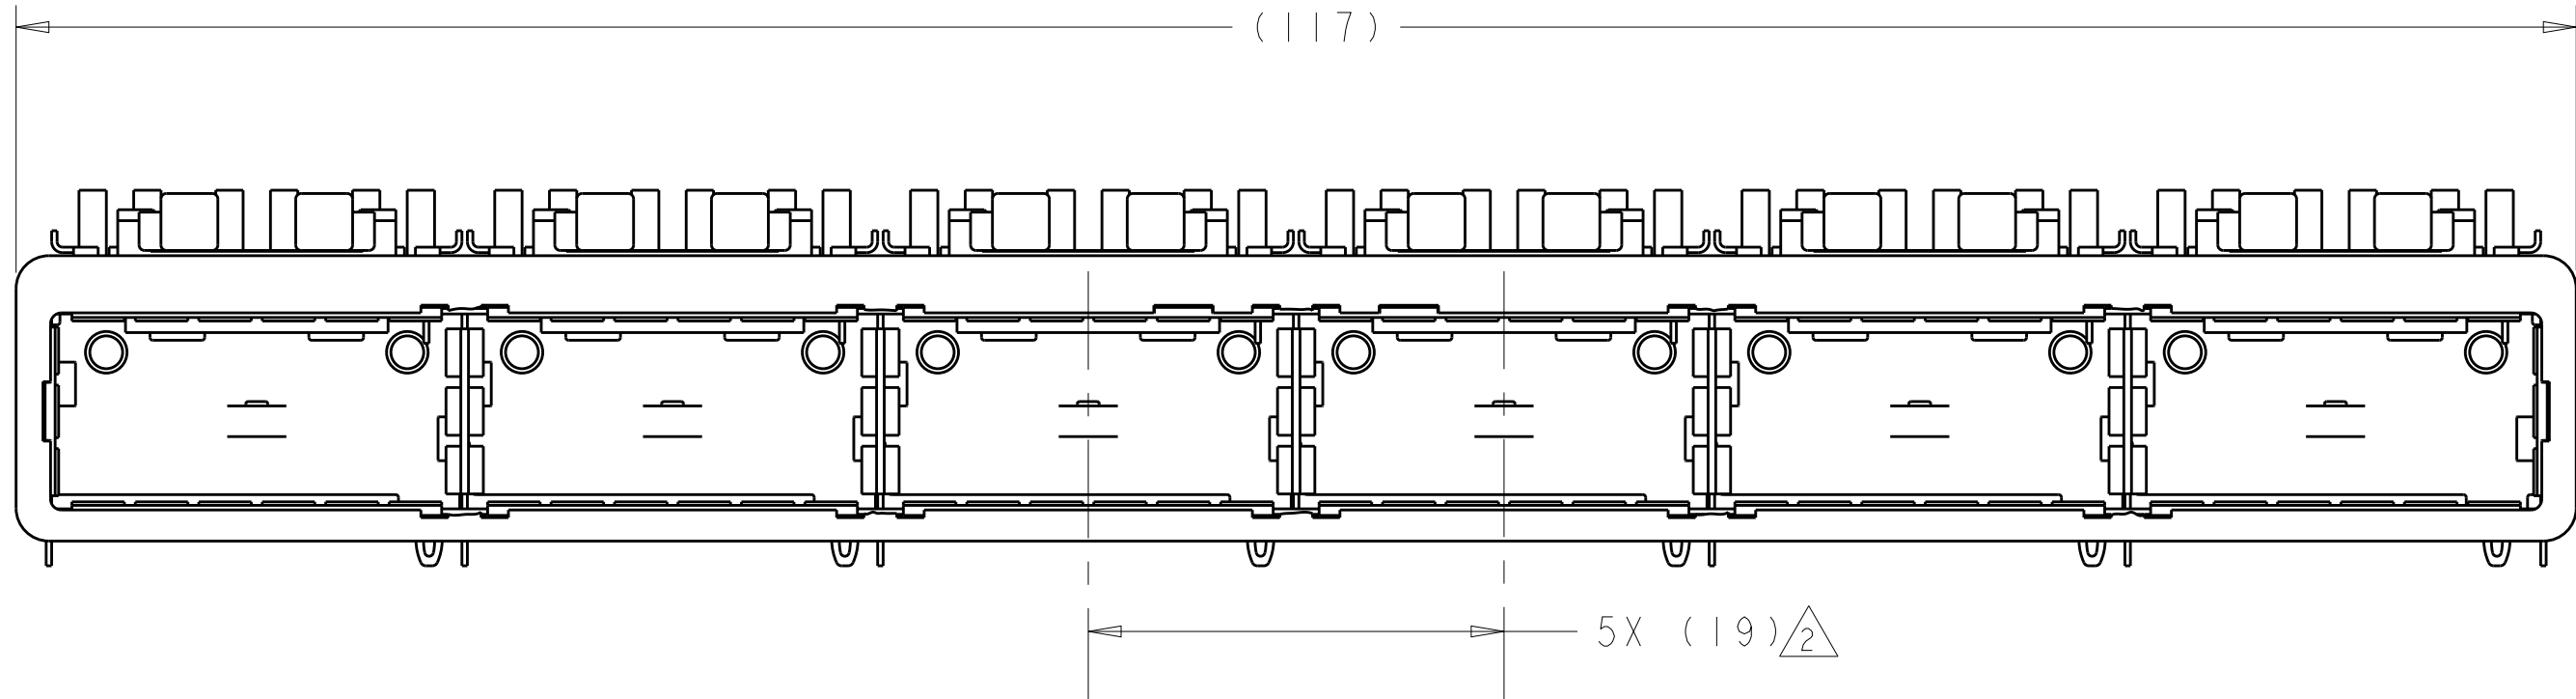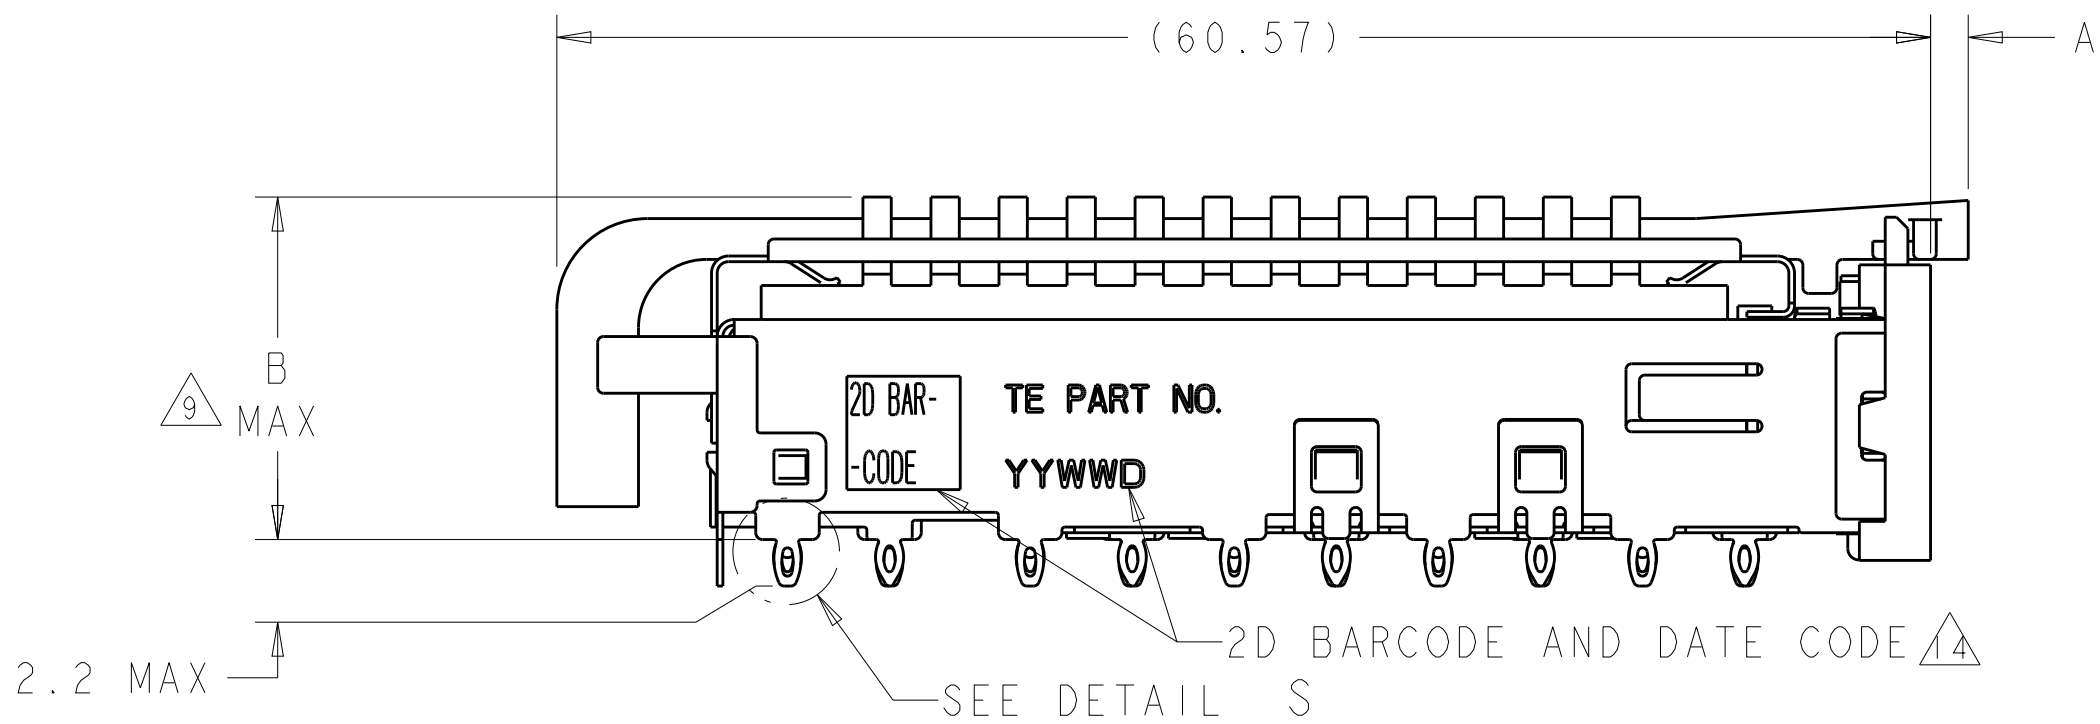


CAGE ASSEMBLY
2143331-2 AS SHOWN
SCALE 8:5

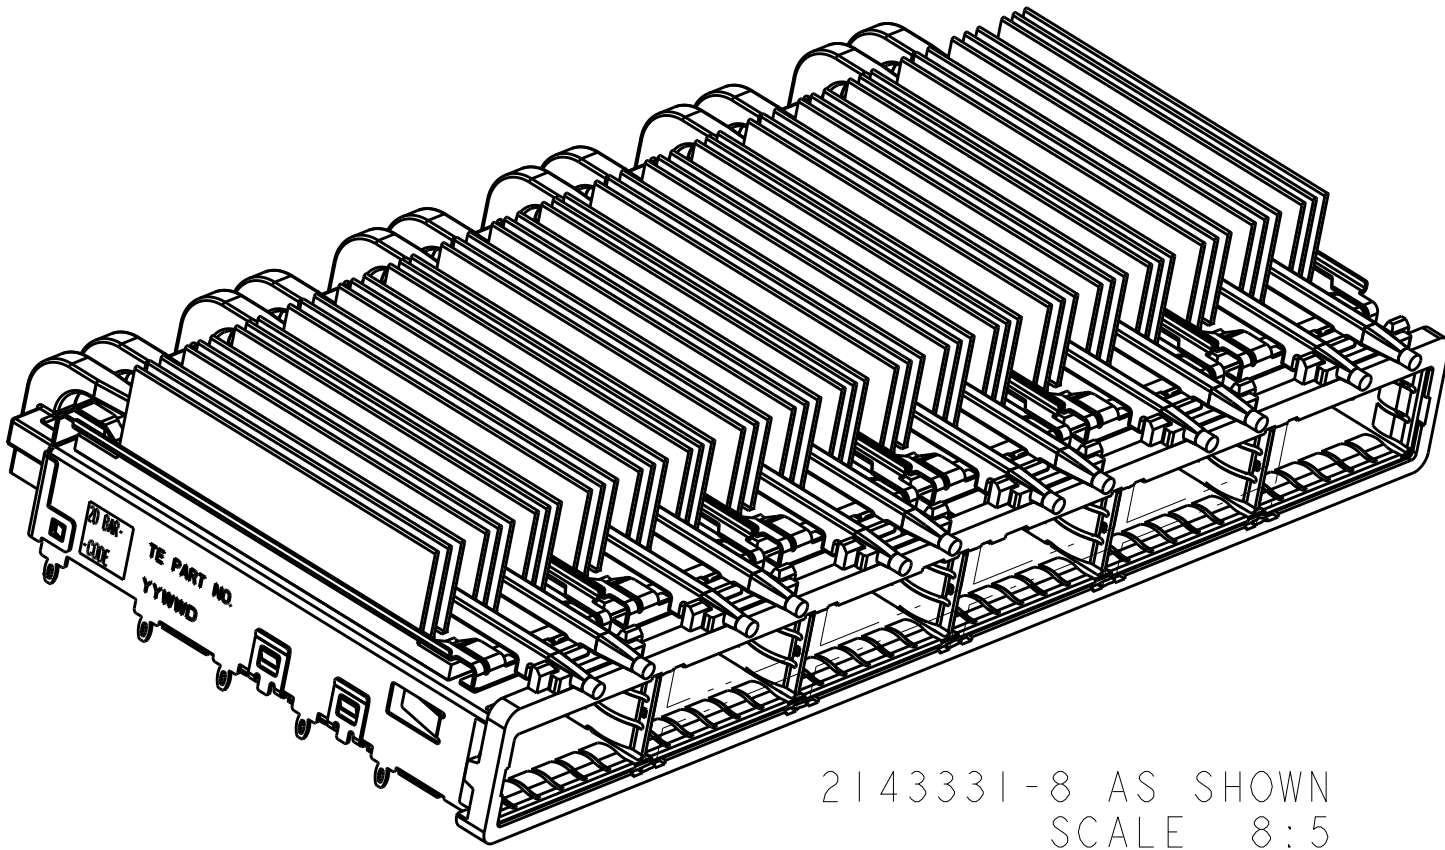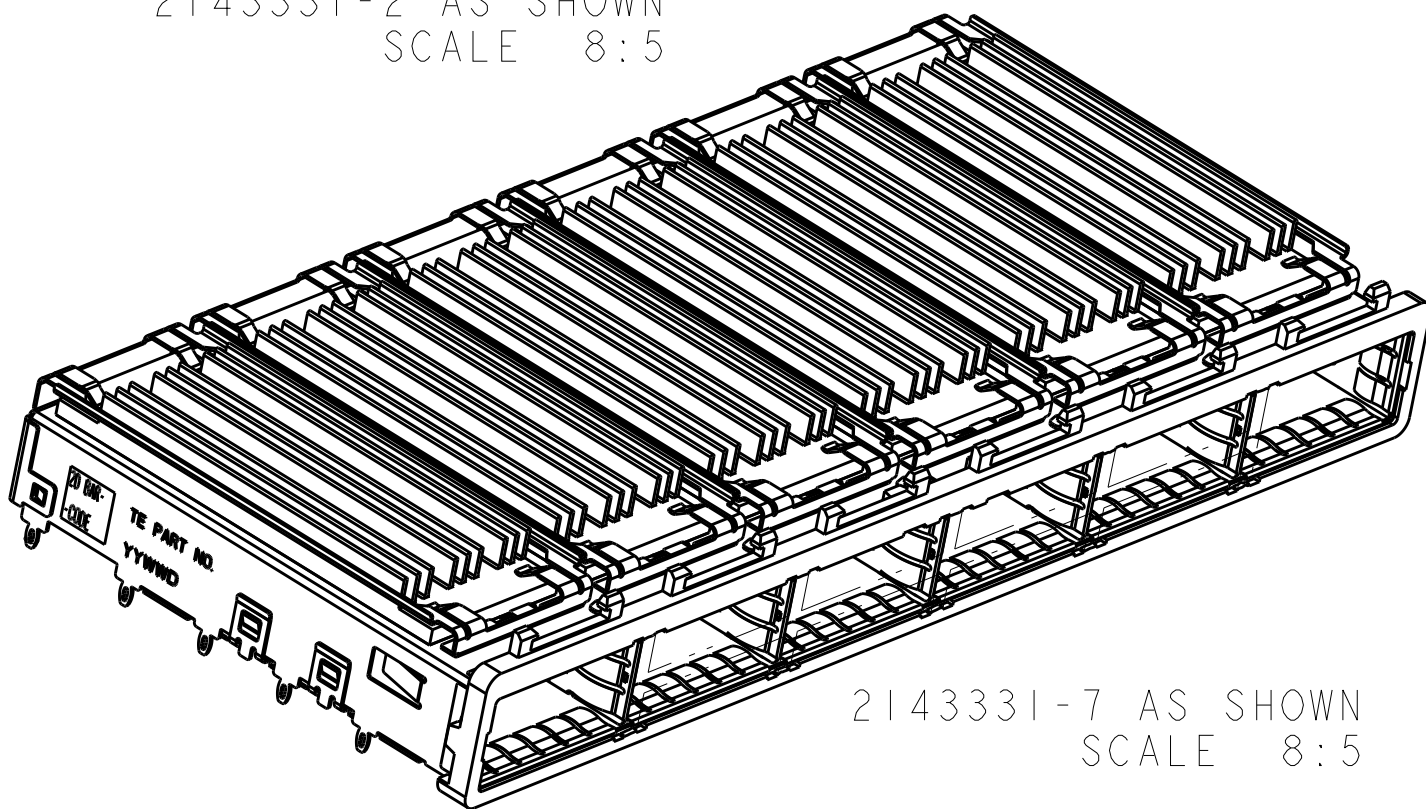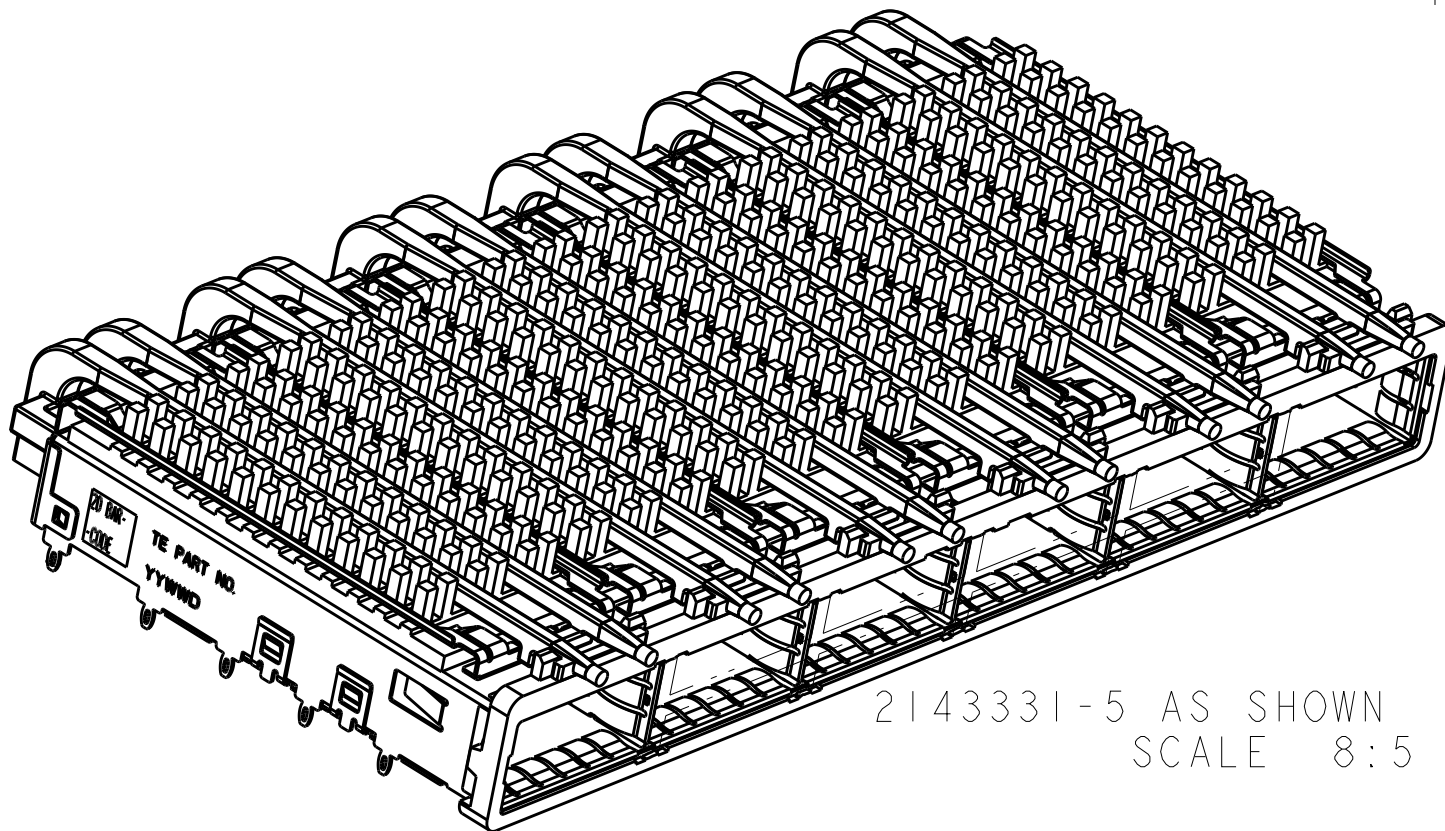


18	ROUND LIGHT PIPE	2.00	21.0	FIN TYPE	2143331-8
	N/A	N/A	15.0	FIN TYPE	2143331-7
18	ROUND LIGHT PIPES	1.66	23.0	NETWORKING	2143331-6
			16.0	SAN	2143331-5
			13.7	PCI	2143331-4
17	SQUARE LIGHT PIPES	1.66	23.0	NETWORKING	2143331-3
			16.0	SAN	2143331-2
			13.7	PCI	2143331-1
17	LIGHT PIPE TYPE	A	B	HEAT SINK PROFILE	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK J. PETERSON APVD J. PETERSON	18MAR2010 18MAR2010 18MAR2010	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±.020 1 PLC ±0.15 2 PLC ±. 3 PLC ±. 4 PLC ±. ANGLES FINISH		PRODUCT SPEC 108-2286	
MATERIAL		APPLICATION SPEC 114-13218		SIZE A1	
1		16		CAGE CODE 00779	
Customer Drawing		WEIGHT		DRAWING NO 2143331	
		SCALE 3:1		SHEET 1 OF 6	
				REV B	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

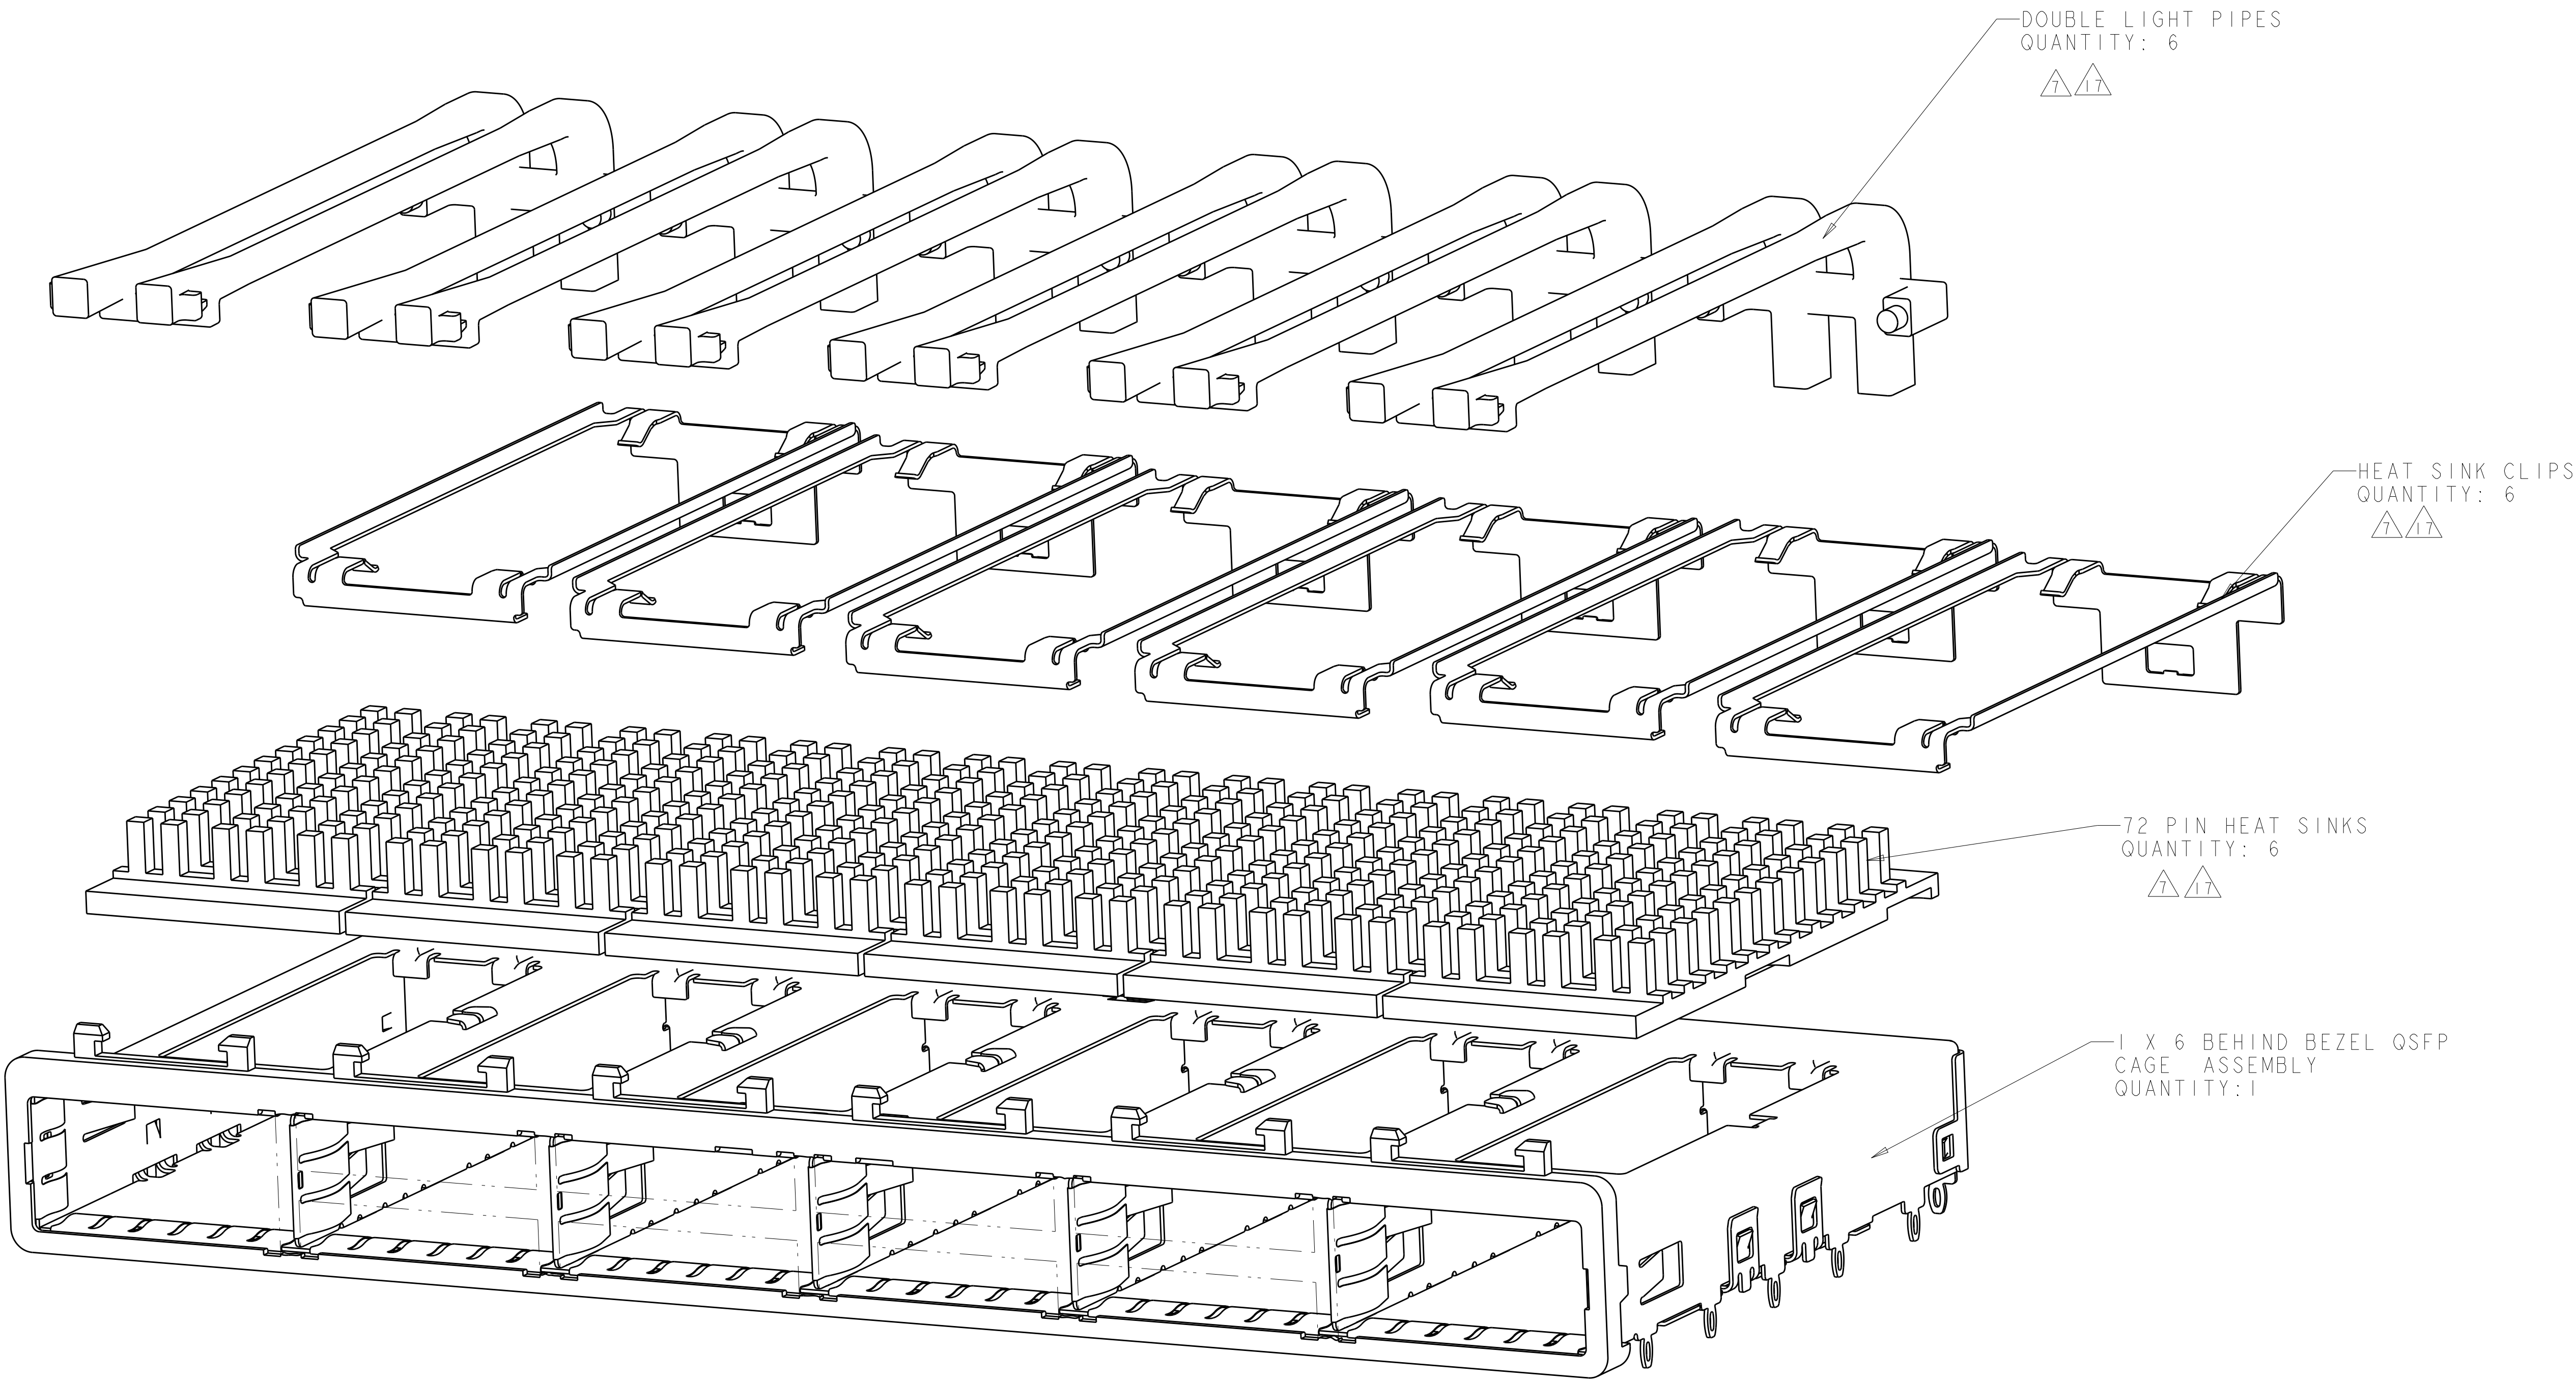


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C. VALENTINE	18MAR2010	 TE Connectivity	
		CHK	J. PETERSON	18MAR2010		
DIMENSIONS:		APVD	J. PETERSON	18MAR2010	NAME	
mm		PRODUCT SPEC				
		108-2286			1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ SOR LIGHT PIPES AND HEAT SINKS, QSPF	
		APPLICATION SPEC				
		114-13218				
		WEIGHT				
		-				
MATERIAL		Customer Drawing			RESTRICTED TO	
					SCALE	
					4:1	
					SHEET	
					2	
					OF	
					6	
					REV	
					B	

LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

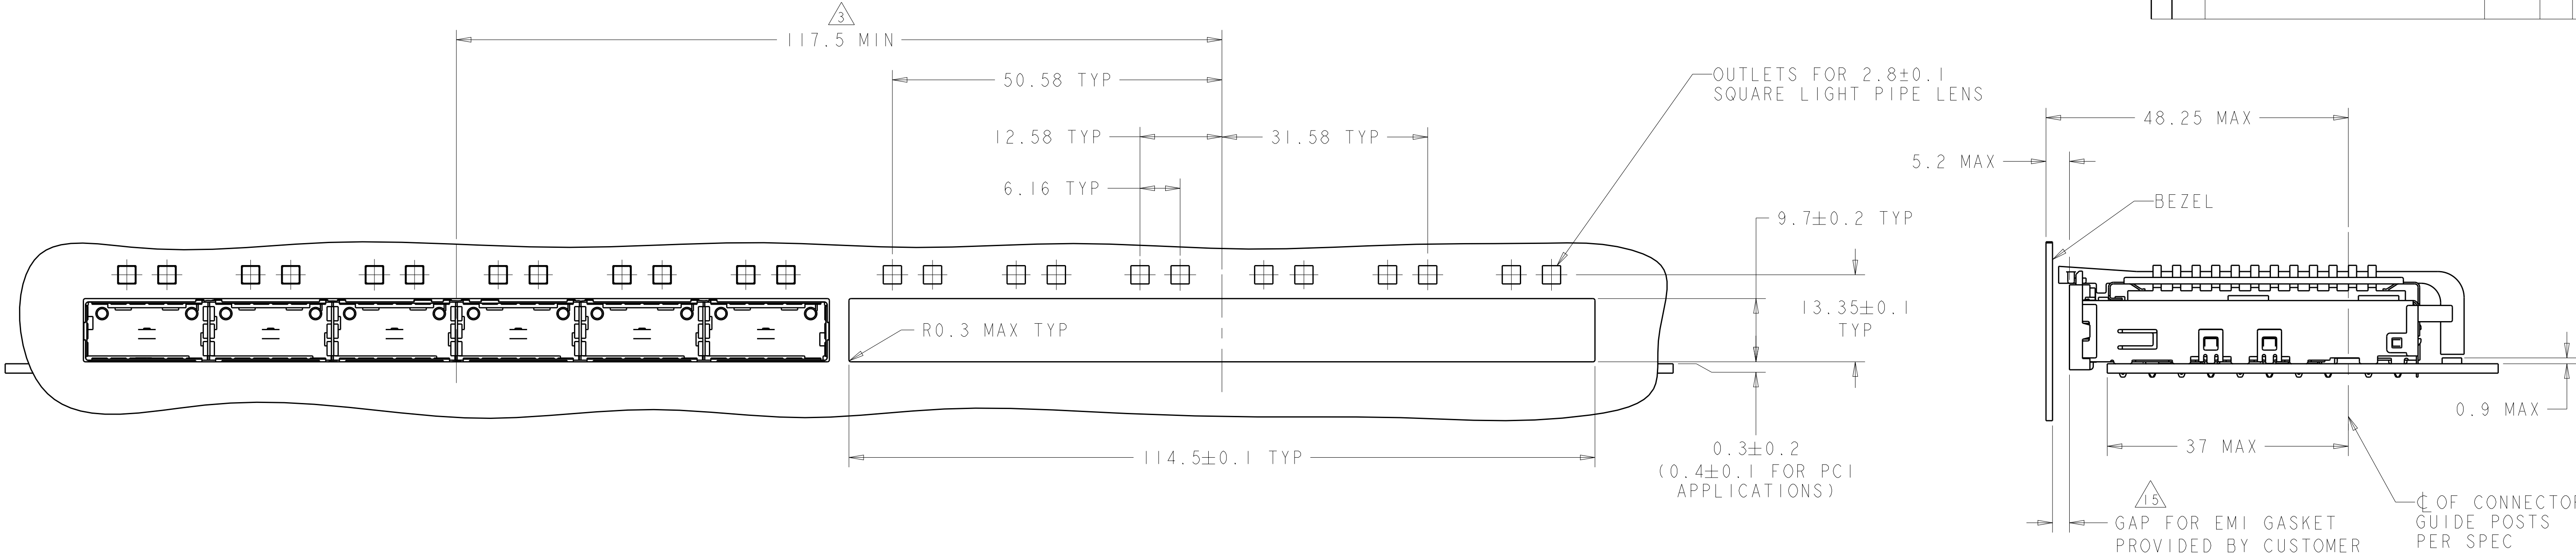


ONE SIDED CONFIGURATION
WITH SQUARE LIGHT PIPES
SCALE 2:1

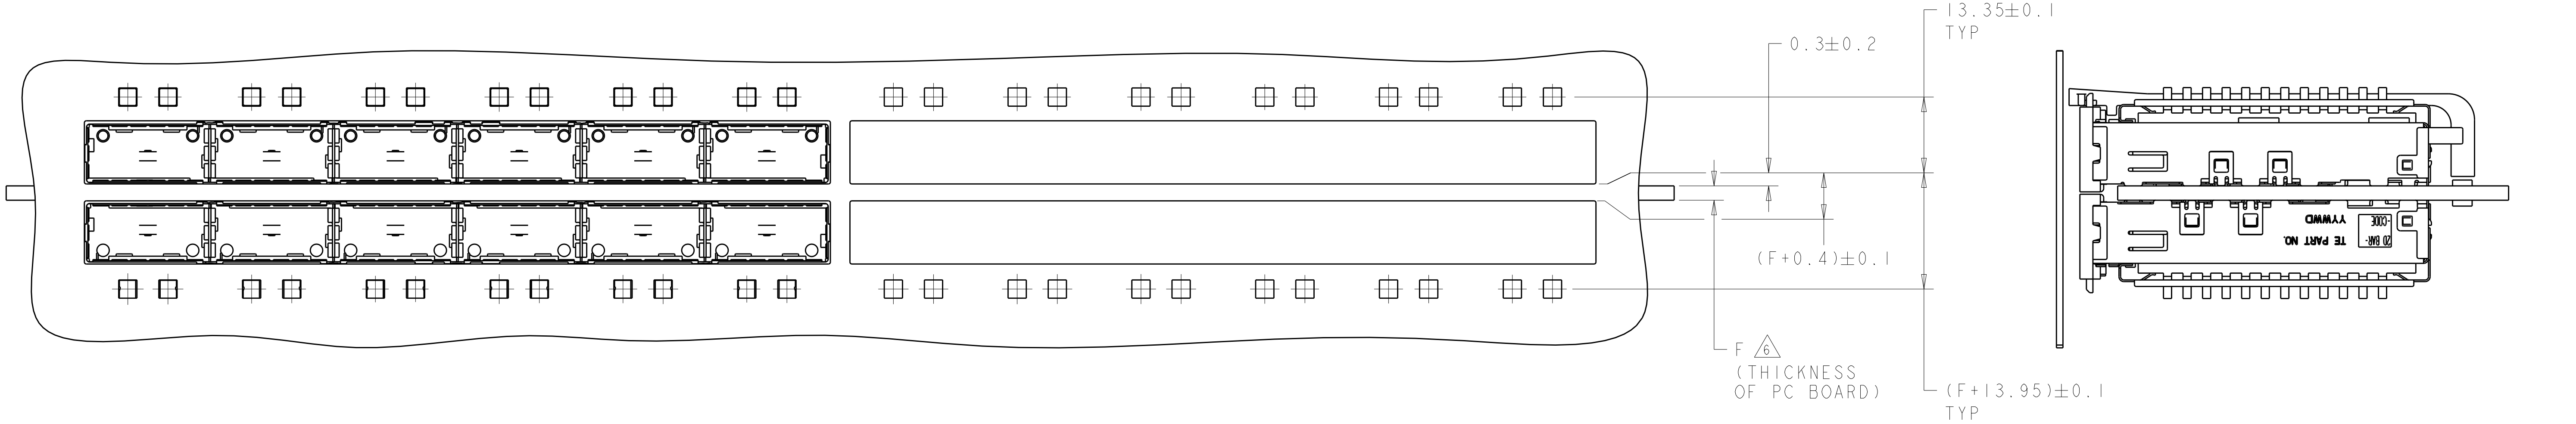


BELLY TO BELLY CONFIGURATION
WITH SQUARE LIGHT PIPES
SIMILAR TO ONE SIDED
EXCEPT WHERE NOTED
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 18MAR2010	 TE Connectivity		NAME 1X6 CAGE ASSEMBLY, BEHIND BEZEL, W/ SQR LIGHT PIPES AND HEAT SINKS, QSFP	
DIMENSIONS:		CHK J. PETERSON 18MAR2010				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. PETERSON 18MAR2010	PRODUCT SPEC			
	0 PLC ± 1 PLC ±0.1 2 PLC ±0.1 3 PLC ± 4 PLC ± ANGLES ± FINISH	108-2286 APPLICATION SPEC 114-13218	APPLICATION SPEC			
MATERIAL	-	WEIGHT	SIZE CAGE CODE DRAWING NO			RESTRICTED TO
-	-	-	A100779C2143331			-
Customer Drawing			SCALE 4:1 SHEET 3 OF 6 REV B			

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-



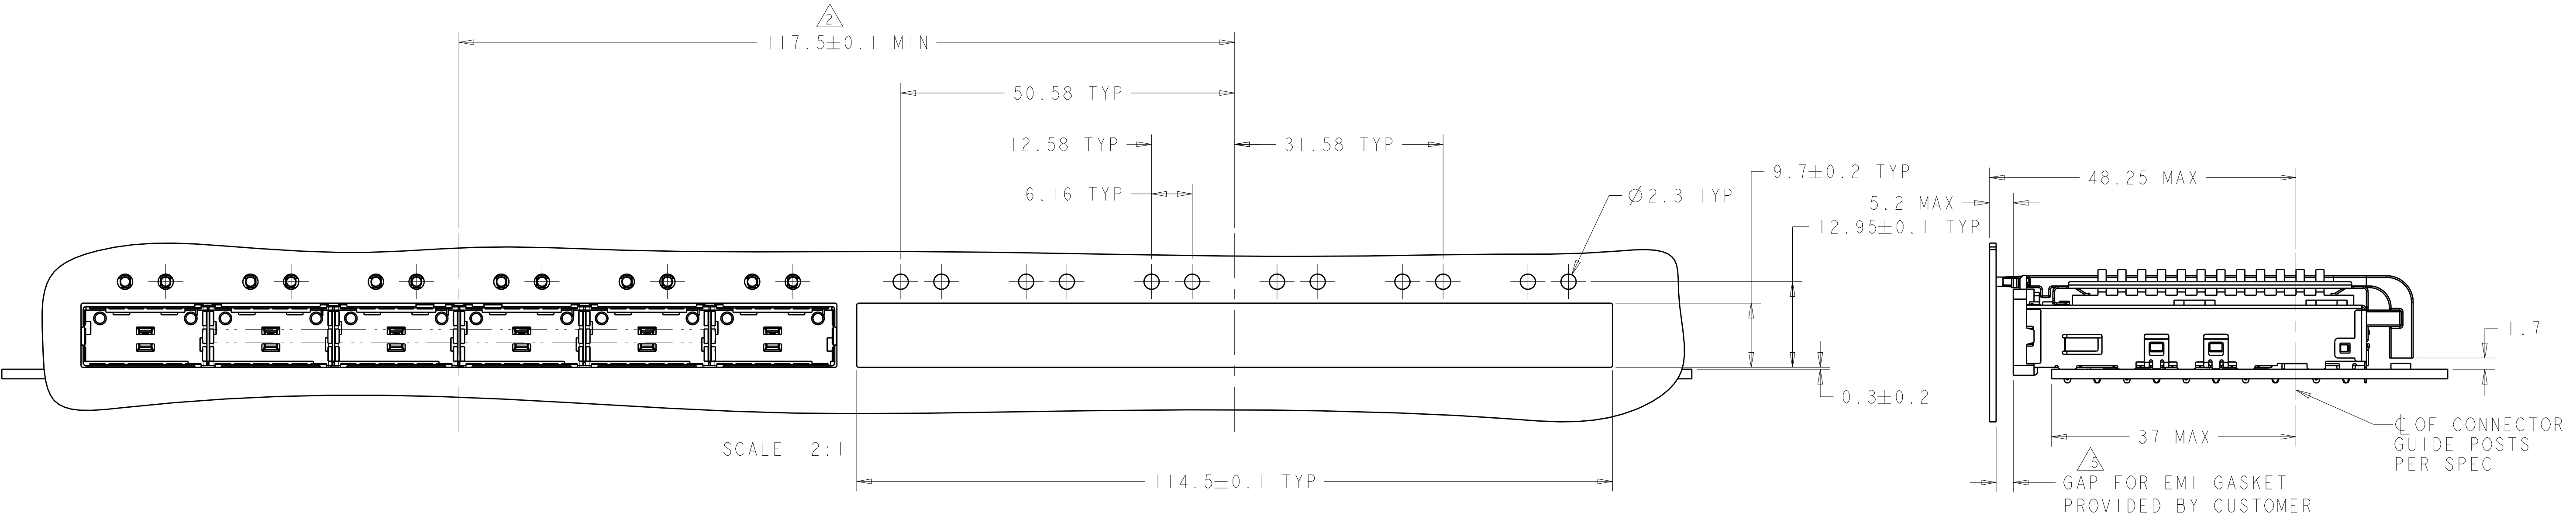


ONE SIDED CONFIGURATION WITH
ROUND LIGHT PIPES

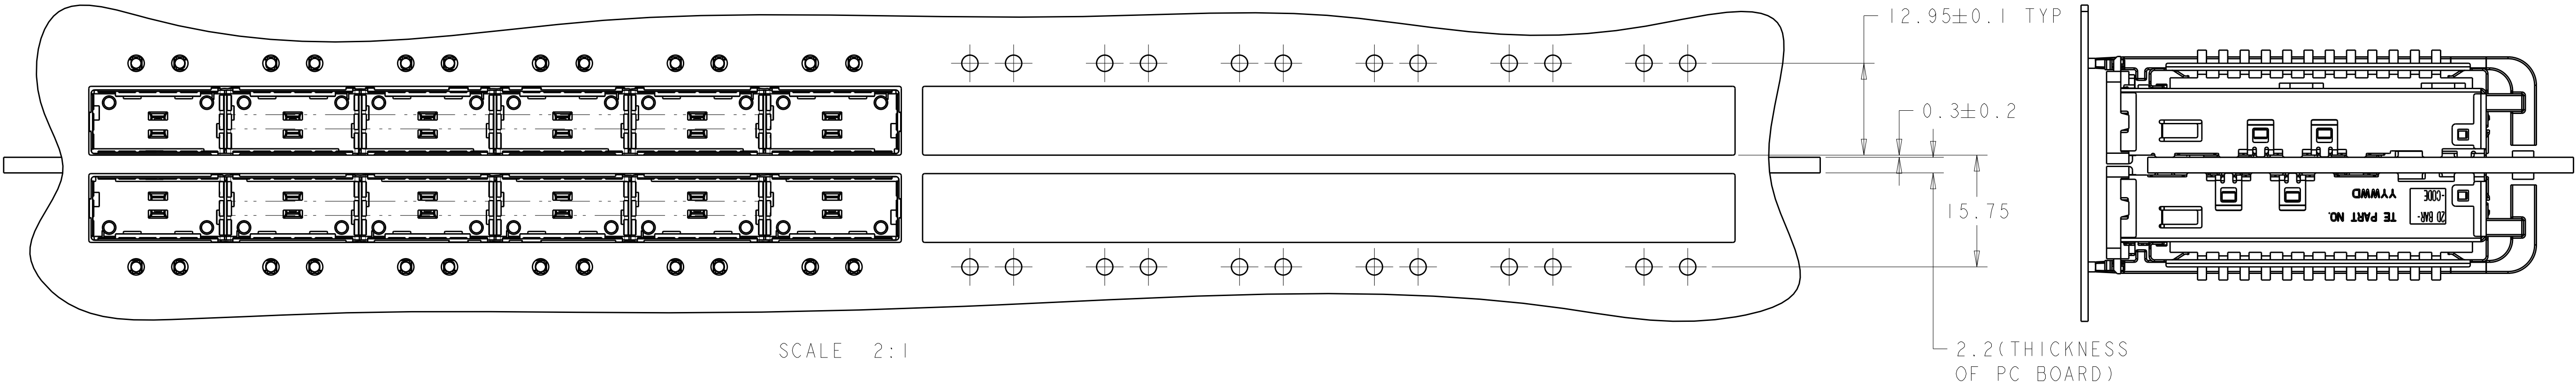


BELLY TO BELLY CONFIGURATION
WITH ROUND LIGHT PIPES
SIMILAR TO ONE SIDED
EXCEPT WHERE NOTED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK J. PETERSON APVD J. PETERSON	18MAR2010 18MAR2010 18MAR2010	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ± 1 PLC ±0.1 2 PLC ±0.1 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-2286 APPLICATION SPEC 114-13218	
MATERIAL		WEIGHT		SIZE CAGE CODE DRAWING NO	
-		-		A100779C=2143331	
Customer Drawing		RESTRICTED TO		SCALE 3:1 SHEET 4 OF 6 REV B	

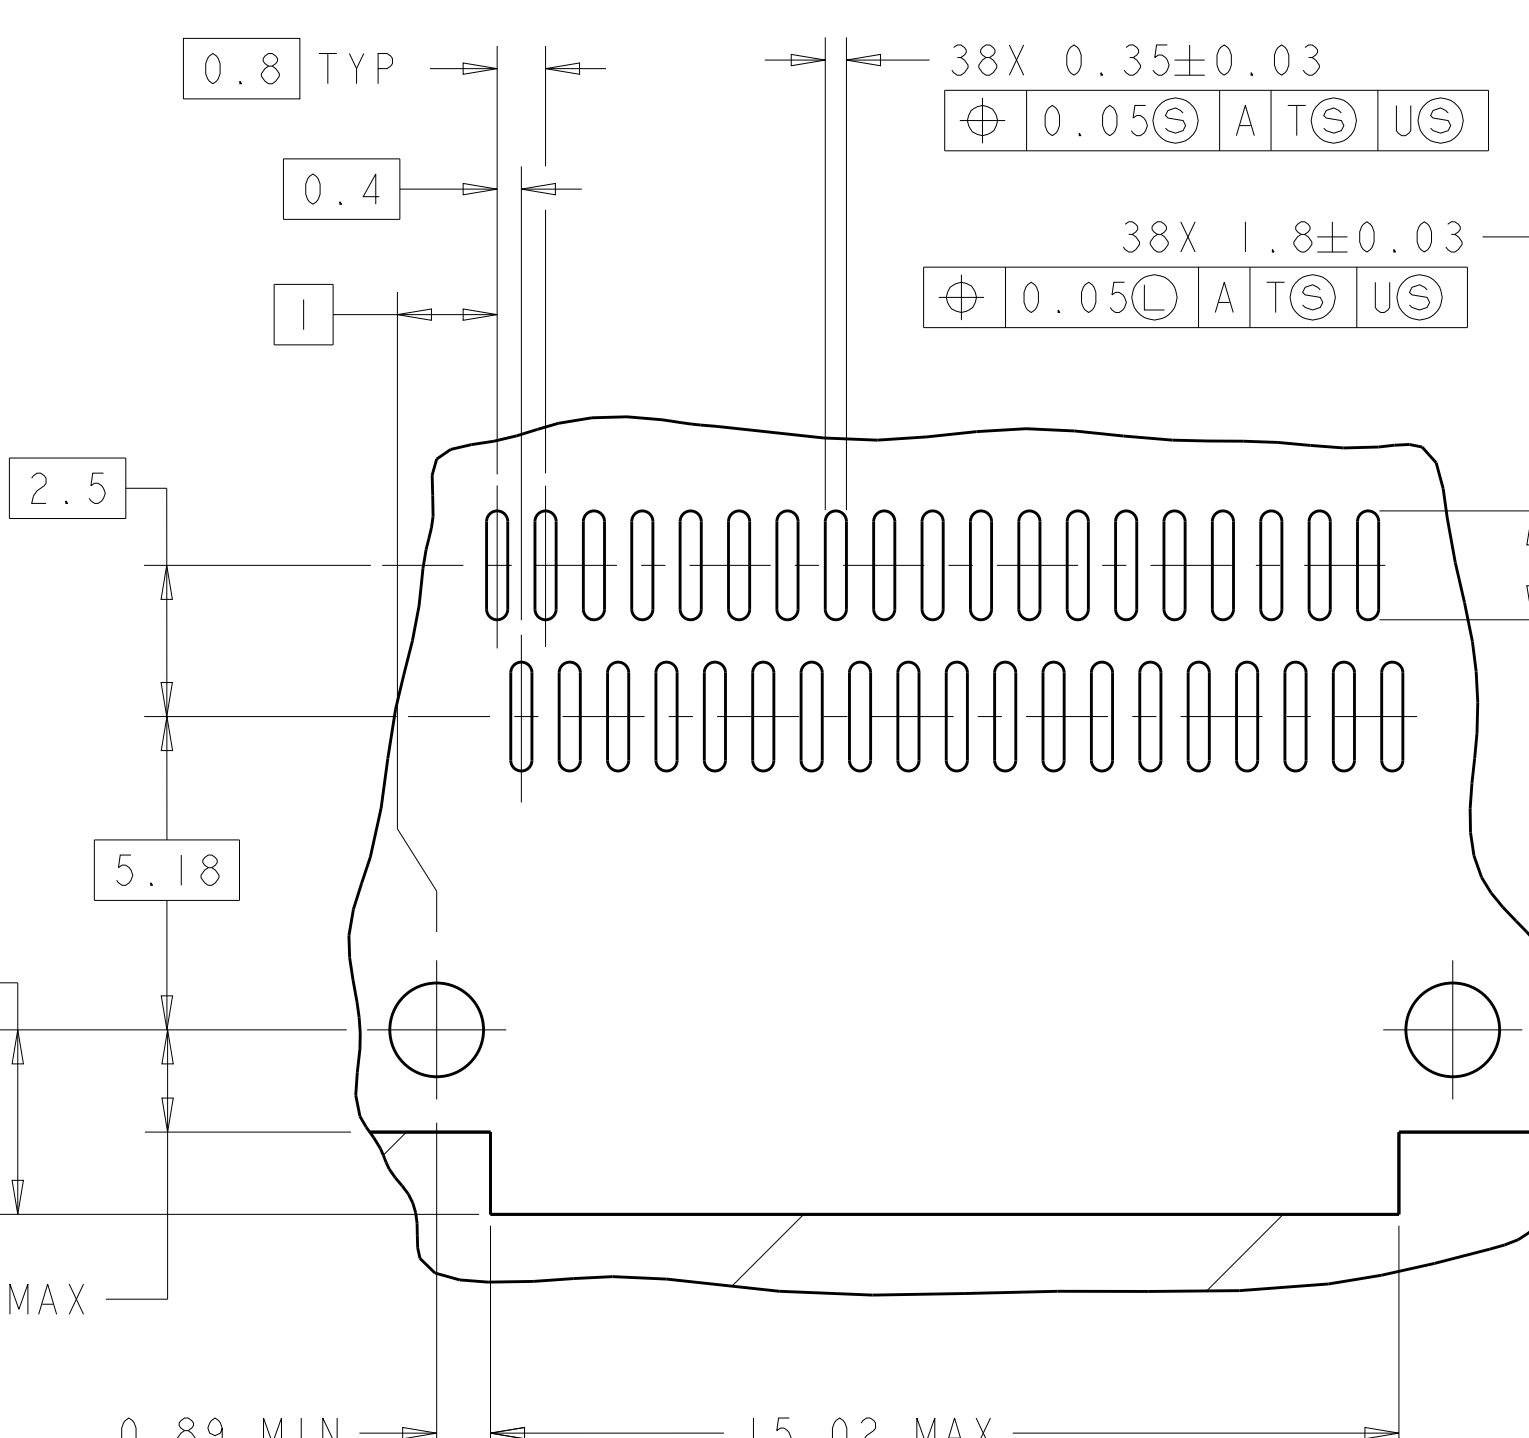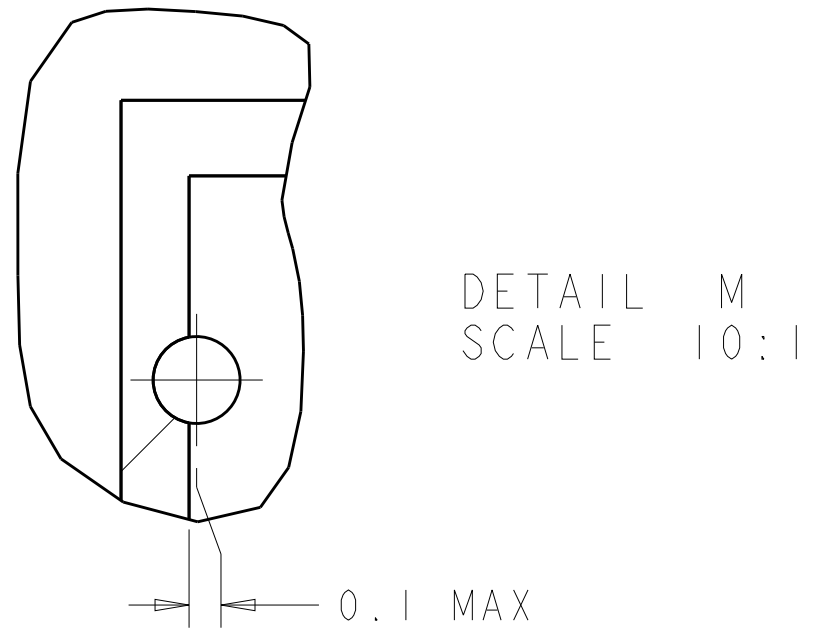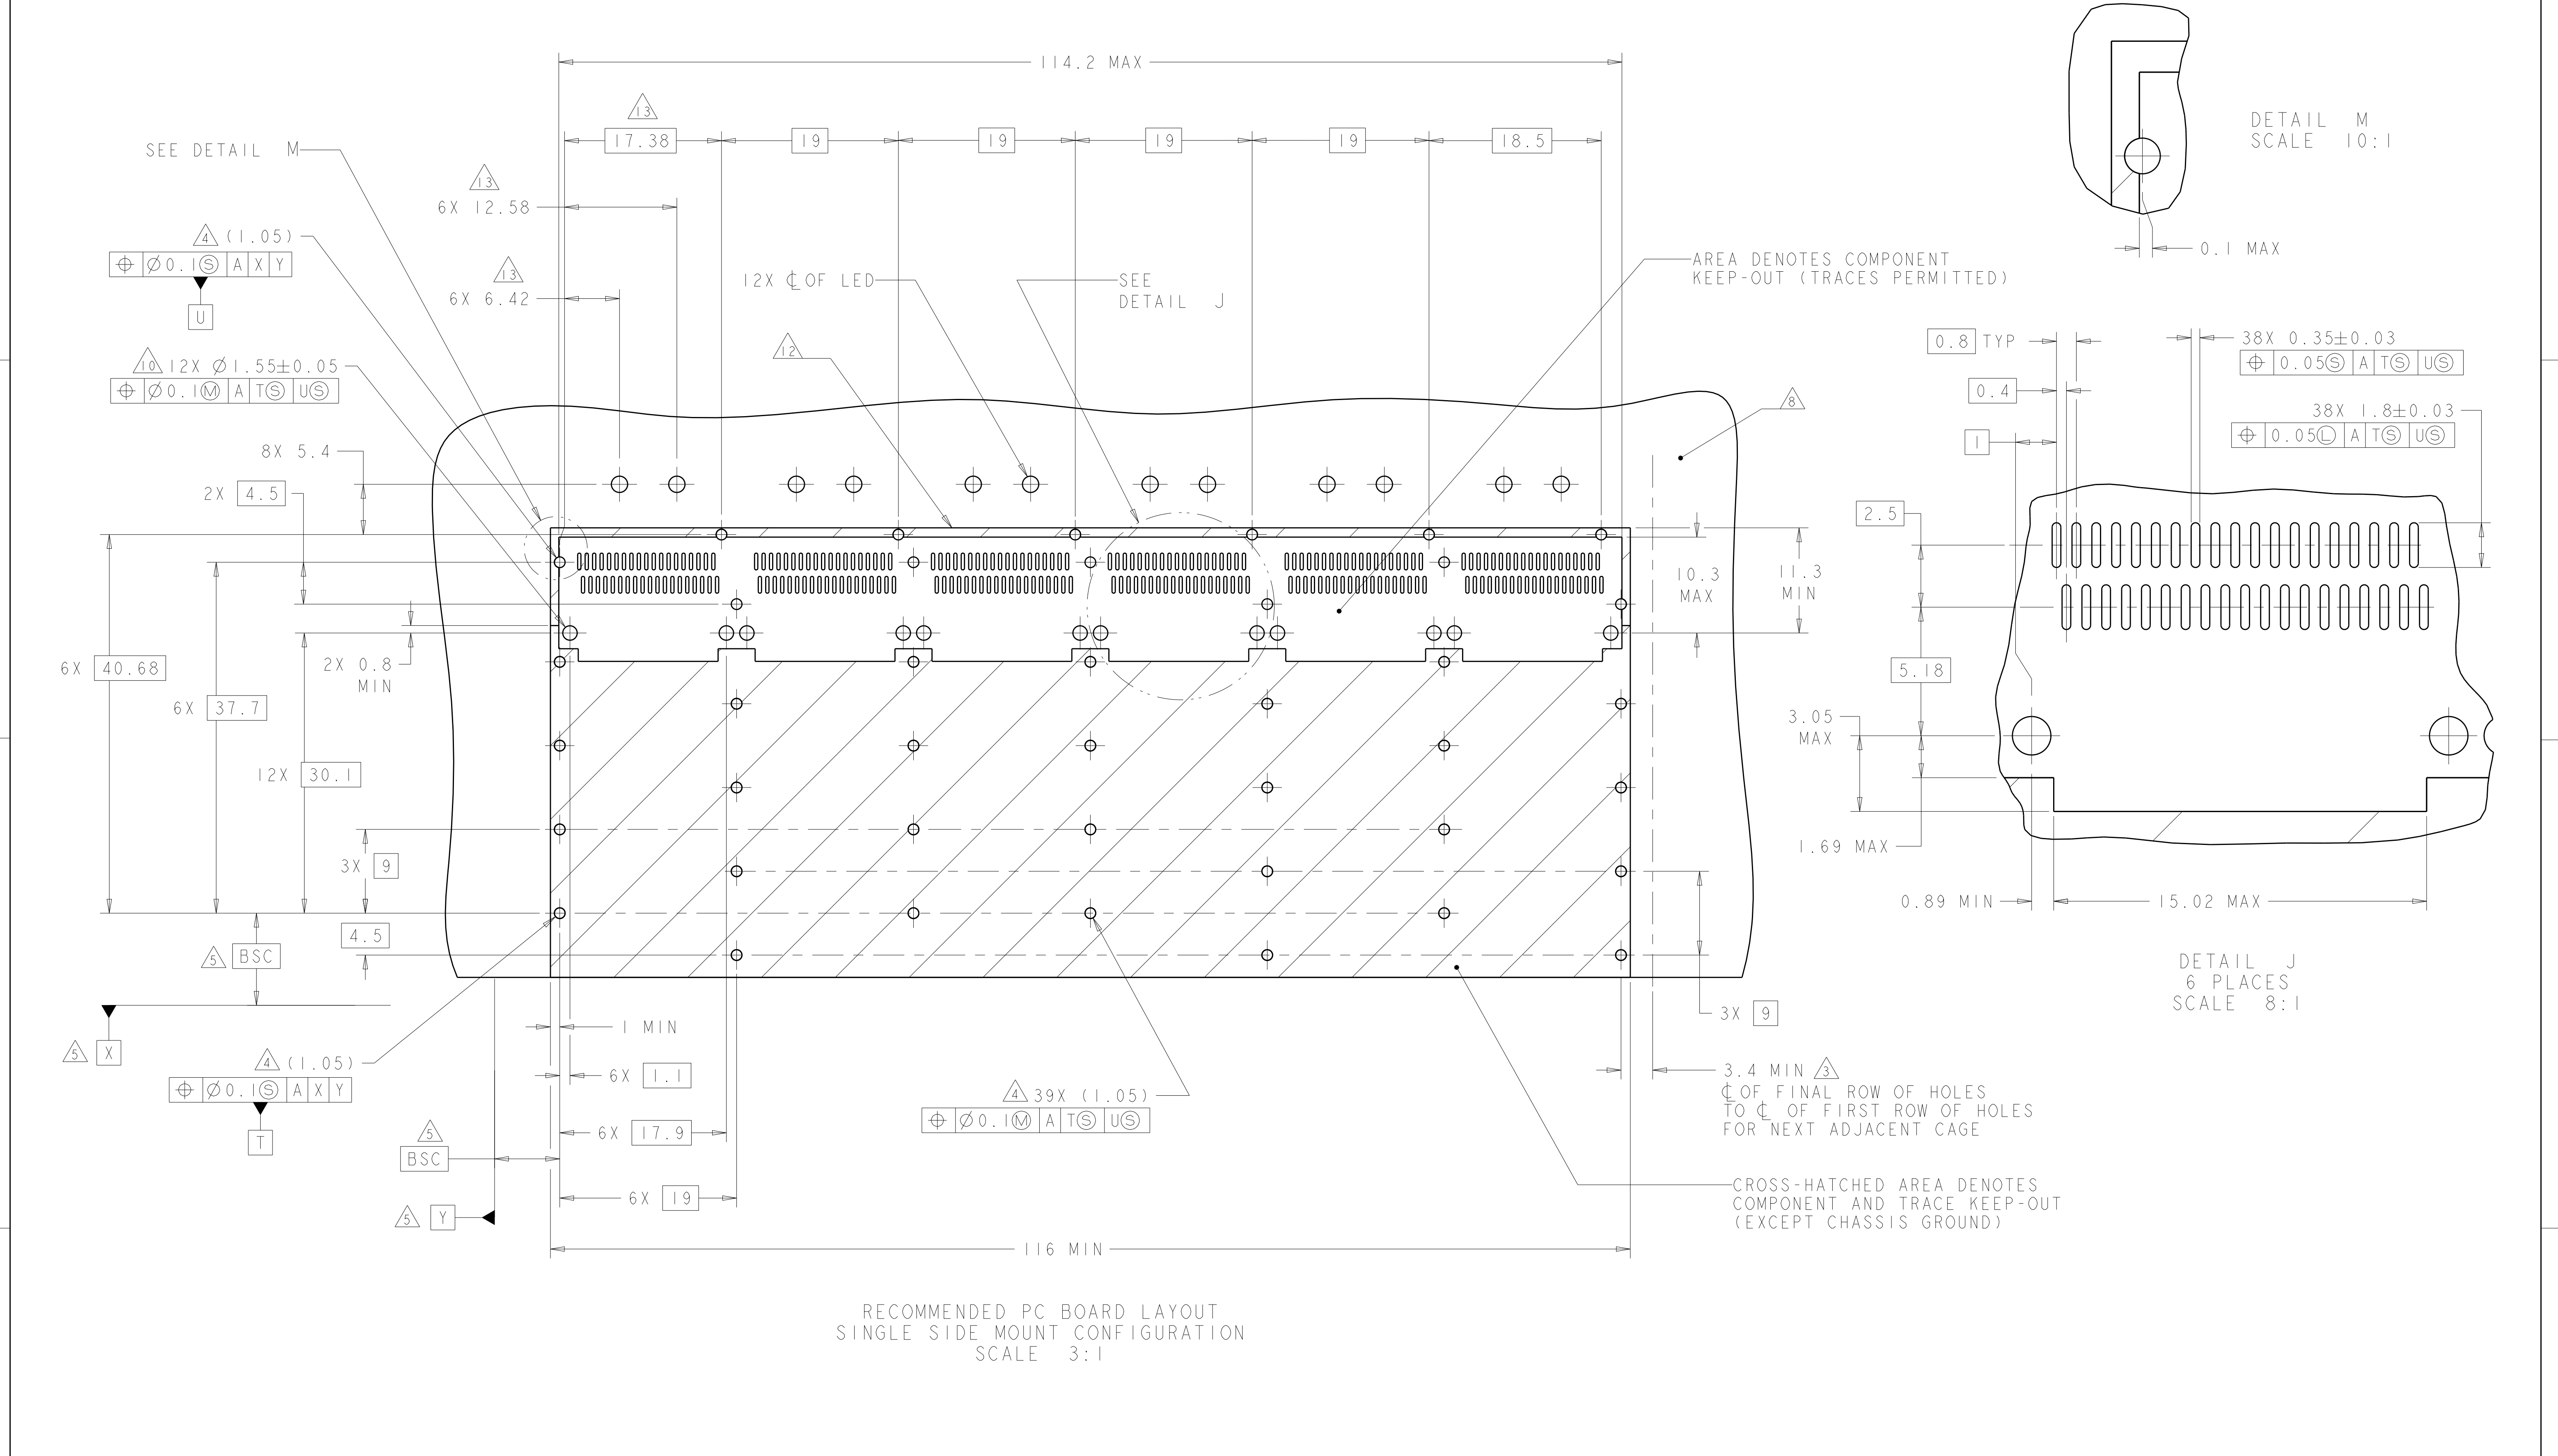

RECOMMENDED PC BOARD LAYOUT
SINGLE SIDE MOUNT CONFIGURATION
SCALE 3:1

LOC	DIST	REVISONS				
		P	LTR	DESCRIPTION	DATE	DWN
GP	00	-	-	SEE SHEET 1	-	-

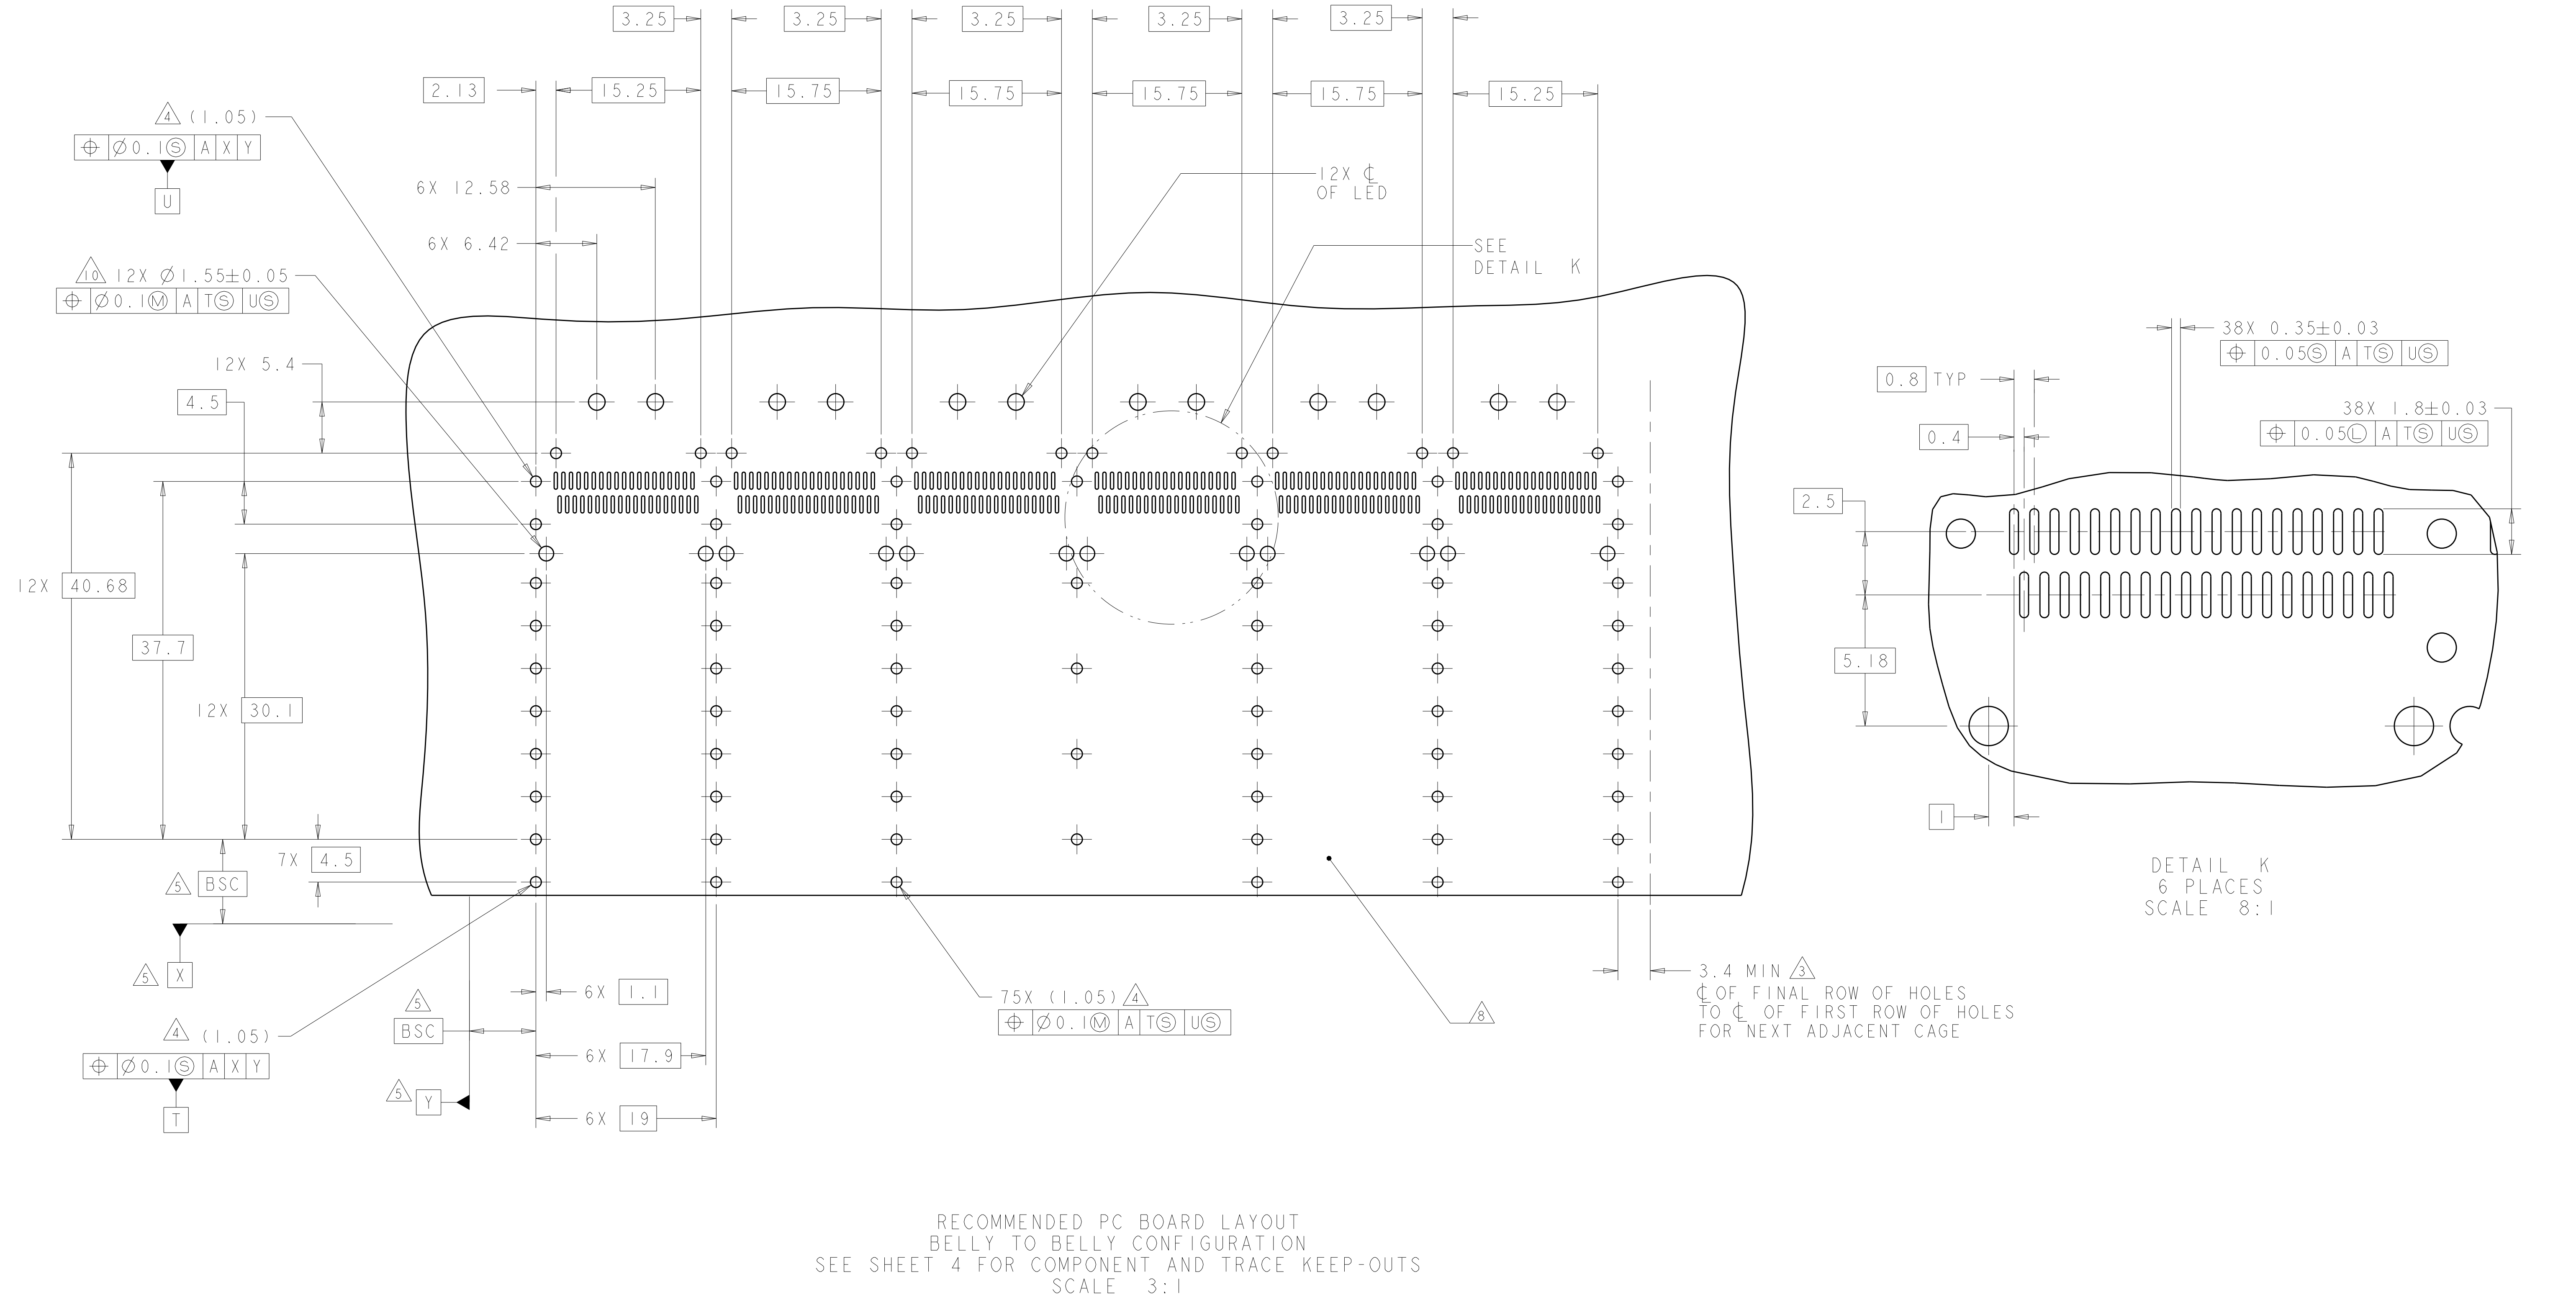

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK J. PETERSON APVD J. PETERSON	18MAR2010 8MAR2010 8MAR2010	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME IX6 CAGE ASSEMBLY, BEHIND BEZEL, W/ SOR LIGHT PIPES AND HEAT SINKS, QSFP	
		0 PLC $\pm$ 1 PLC ± 0.1 2 PLC ± 0.1 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$ FINISH		PRODUCT SPEC 108-2286 APPLICATION SPEC 114-13218	
MATERIAL -		WEIGHT -		SIZE A100779C=2143331	
Customer Drawing		SCALE 4:1		SHEET 6 OF 6	
				REV B	



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331