

### 5 Watt

- Energy Efficiency Level VI
- Barrel Jack & USB Versions
- Fixed Mains Connectors
- Universal Input
- Output Voltages from 5.0 V to 12.0 V
- Class II Construction
- Low Cost



#### Dimensions:

##### VEL (body only):

- US: 2.17 x 0.95 x 1.40" (55.1 x 24.1 x 35.49 mm)
- EU: 2.17 x 0.95 x 1.40" (55.1 x 24.1 x 35.49 mm)
- UK: 2.17 x 1.95 x 1.69" (55.1 x 49.5 x 42.9 mm)

The VEL05 series of wall plug adaptors comply with the very latest energy efficiency VI standards with high active mode efficiency and extremely low no load power consumption. Available with multiple USB options in addition to the standard jack plug connector these adaptors suit a wide variety of cost sensitive applications while maintaining industry leading performance.

### Models & Ratings

| Output Power | Output Voltage | Output Current | Total Regulation <sup>(2)</sup> | Efficiency | Output Connector          | Model Number <sup>(4)</sup> |
|--------------|----------------|----------------|---------------------------------|------------|---------------------------|-----------------------------|
| 5 W          | 5.0V           | 1000 mA        | 5%                              | 77%        | USB A in case             | VEL05US050-XX-BB            |
|              | 5.0V           | 1000 mA        | 5%                              | 74%        | Mini USB B                | VEL05US050-XX-MB            |
|              | 5.0V           | 1000 mA        | 5%                              | 74%        | Micro USB B               | VEL05US050-XX-UB            |
|              | 5.0V           | 1000 mA        | 5%                              | 75%        | 5.5 x 2.1 x 12 mm DC Jack | VEL05US050-XX-JA            |
|              | 6.0V           | 830 mA         | 5%                              | 78%        | 5.5 x 2.1 x 12 mm DC Jack | VEL05US060-XX-JA            |
|              | 9.0V           | 550 mA         | 5%                              | 78%        | 5.5 x 2.1 x 12 mm DC Jack | VEL05US090-XX-JA            |
|              | 12.0V          | 420 mA         | 5%                              | 79%        | 5.5 x 2.1 x 12 mm DC Jack | VEL05US120-XX-JA            |

### Notes

1. Other output voltages available, contact sales for details.
2. Total regulation includes initial set accuracy, line and load regulation.
3. Typical average of efficiencies measured at 25%, 50%, 75% and 100% load and 115 VAC input.
4. Replace 'XX' in model number with 'US' for US mains plug, 'UK' for UK mains plug or 'EU' for European mains plug.

### Input

| Characteristic      | Minimum                     | Typical | Maximum | Units | Notes & Conditions           |
|---------------------|-----------------------------|---------|---------|-------|------------------------------|
| Input Voltage       | 90                          |         | 264     | VAC   |                              |
| Input Frequency     | 47                          |         | 63      | Hz    |                              |
| Input Current       |                             |         | 0.25    | A     | 100 VAC                      |
| Inrush Current      |                             |         | 60      | A     | 240 VAC, cold start at 25 °C |
| Power Factor        |                             |         |         |       | EN61000-3-2, class A         |
| No Load Input Power |                             |         | <0.1    | W     |                              |
| Input Protection    | Internal T1.0A/250 VAC fuse |         |         |       |                              |

### Output

| Characteristic           | Minimum | Typical | Maximum | Units           | Notes & Conditions  |
|--------------------------|---------|---------|---------|-----------------|---|
| Output Voltage           | 5.0     |         | 12.0    | V               | See Models and Ratings table  |
| Minimum Load             | 0       |         |         | A               | No minimum load required  |
| Start Up Delay           |         |         | 4       | s               |   |
| Start Up Rise Time       |         | 50      |         | ms              |   |
| Hold Up Time             |         | 8       |         | ms              | Full load and 100 VAC   |
| Total Regulation         |         |         | 5       | %               | See Models and Ratings table  |
| Transient Response       |         |         | 4       | % deviation     | Recovery within <1% within 500 $\mu$ s for a 50% step load change at 0.2 A/ $\mu$ s |
| Ripple & Noise           |         |         | 200     | mV pk-pk        | 20 MHz bandwidth  |
| Short Circuit Protection |         |         |         |                 | Continuous, trip and restart (hiccup mode) with auto recovery                       |
| Temperature Coefficient  |         |         | 0.05    | %/ $^{\circ}$ C |   |

### General

| Characteristic            | Minimum | Typical   | Maximum | Units  | Notes & Conditions                  |
|---------------------------|---------|-----------|---------|--------|-------------------------------------|
| Efficiency                | 74      |           | 79      | %      | See Models and Ratings table        |
| Energy Efficiency         |         |           |         |        | Level VI                            |
| Isolation                 |         | 3000      |         | VAC    | Input to Output                     |
| Switching Frequency       | 24      |           | 70      | kHz    | Variable                            |
| Mean Time Between Failure | 100     |           |         | kHrs   | MIL-HDBK-217F at 25 $^{\circ}$ C GB |
| Weight                    |         | 0.28 (80) |         | lb (g) |                                     |

### Environmental

| Characteristic        | Minimum | Typical | Maximum | Units        | Notes & Conditions  |
|-----------------------|---------|---------|---------|--------------|---|
| Operating Temperature | 0       |         | +60     | $^{\circ}$ C | Derate from 100% load at 50 $^{\circ}$ C to 50% load at 60 $^{\circ}$ C |
| Storage Temperature   | -40     |         | +85     | $^{\circ}$ C |   |
| Operating Humidity    | 5       |         | 95      | %            | RH, non-condensing  |
| Cooling               |         |         |         |              | Natural convection  |
| Shock                 |         |         |         |              | 1 m drop onto concrete on each of 6 axes                                |
| Vibration             | 10      |         | 300     | Hz           | 2 g 15 mins/sweep, 30 mins for each of 3 axes                           |

### EMC: Emissions

| Phenomenon        | Standard    | Test Level | Notes & Conditions |
|-------------------|-------------|------------|--------------------|
| Conducted         | EN55022     | Level B    |                    |
| Radiated          | EN55022     | Level B    |                    |
| Harmonics Current | EN61000-3-2 | Class A    |                    |
| Voltage Flicker   | EN61000-3-3 |            |                    |

### EMC: Immunity


| Phenomenon             | Standard  | Test Level | Criteria | Notes & Conditions                 |
|------------------------|---|------------|----------|------------------------------------|
| ESD Immunity           | EN61000-4-2   | 2,3        | B        | $\pm$ 4 kV contact, $\pm$ 8 kV air |
| Radiated Immunity      | EN61000-4-3   | 3 V/m      | A        |                                    |
| EFT/Burst              | EN61000-4-4   | Level 2    | B        |                                    |
| Surges                 | EN61000-4-5   | Level 2    | A        |                                    |
| Conducted Immunity     | EN61000-4-6   | 3 V        | A        |                                    |
| Magnetic Fields        | EN61000-4-8   | 1 A/m      | A        |                                    |
| Dips and Interruptions | EN55024 100% 10 ms, 30% 500 ms, 100% 5000 ms, Perf Criteria A, A, B |            |          |                                    |

### Safety Approvals


| Phenomenon | Standard  |
|------------|---|
| CB Report  | IEC60950-1  |
| UL         | UL/cUL60950-1, approved as limited power source (LPS) |
| TUV        | IEC60950-1  |
| CCC        |   |

### Mechanical Details

#### VEL05US-US-BB

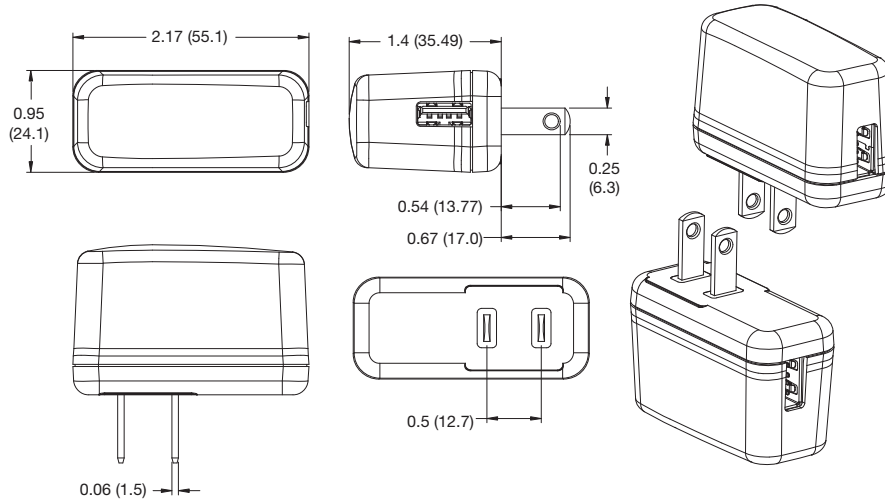


#### VEL05US-US-MB/UB/JA

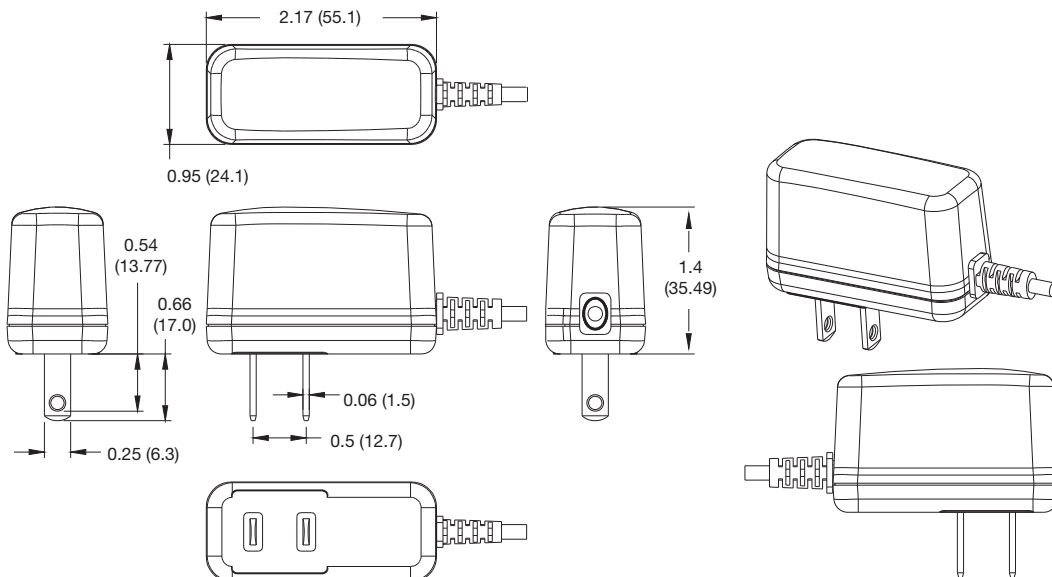


### Mechanical Details

#### VEL05US-UK-BB

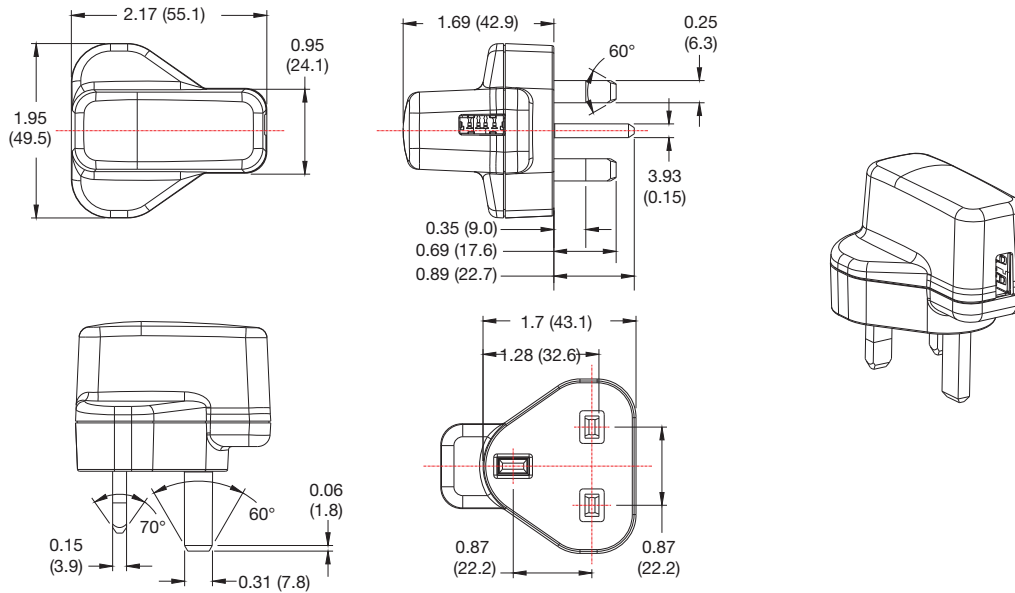


#### VEL05US-UK-MB/UB/JA

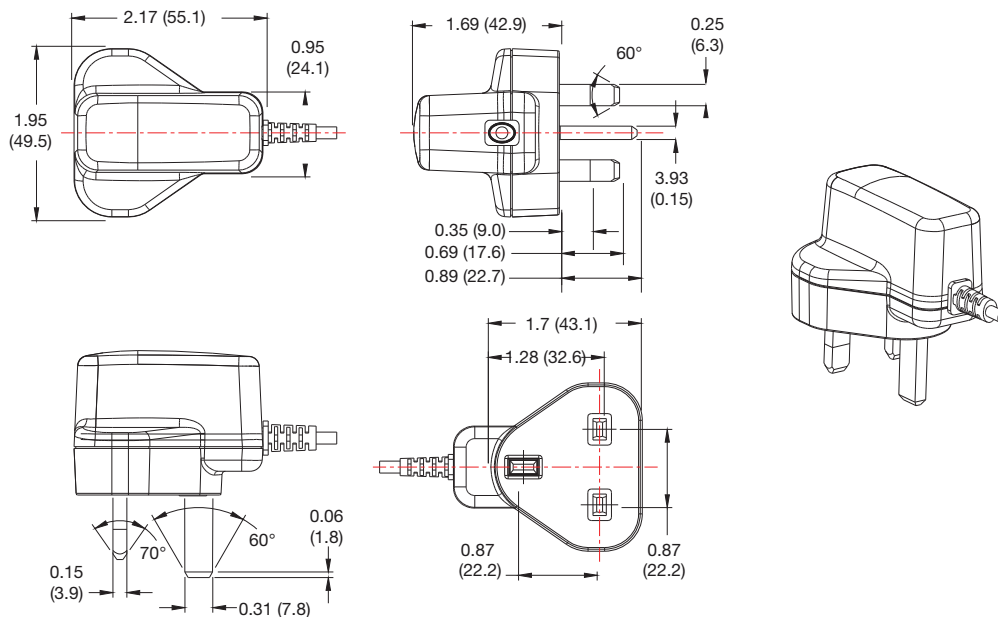


### Mechanical Details

#### VEL05US-EU-BB

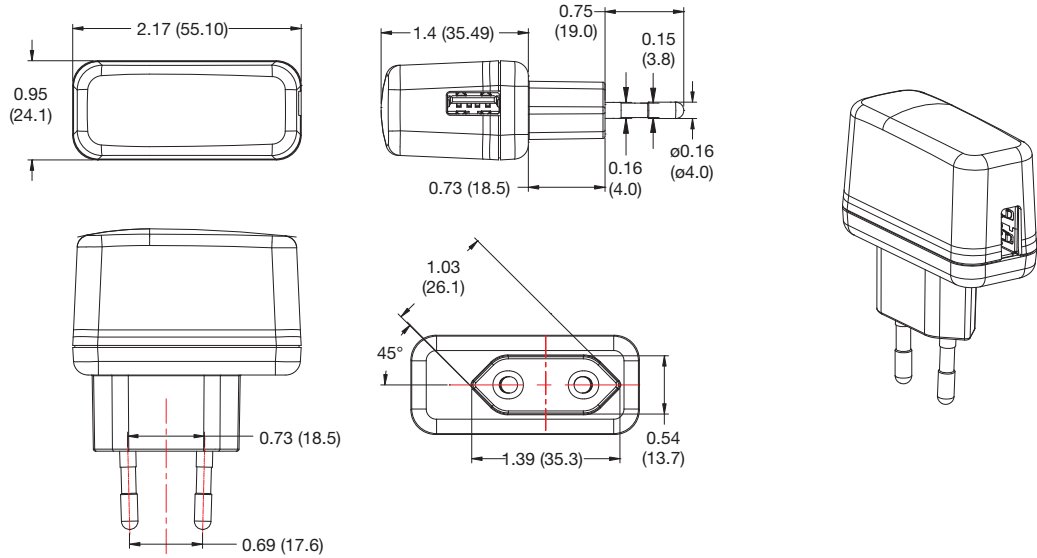


#### VEL05US-EU-MB/UB/JA

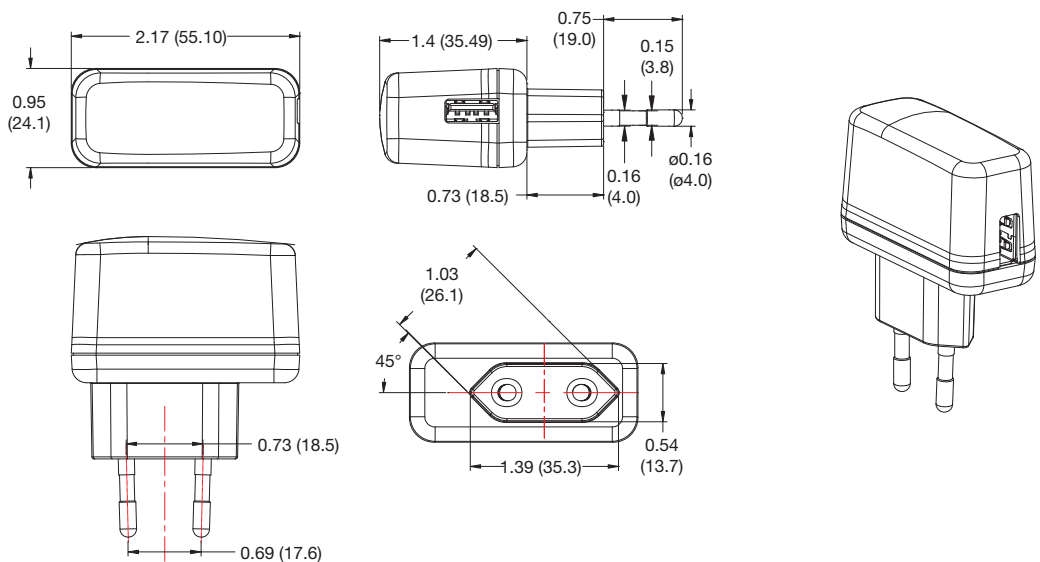


### Mechanical Details

#### Output Lead and Connection - Mini USB Versions (MB)

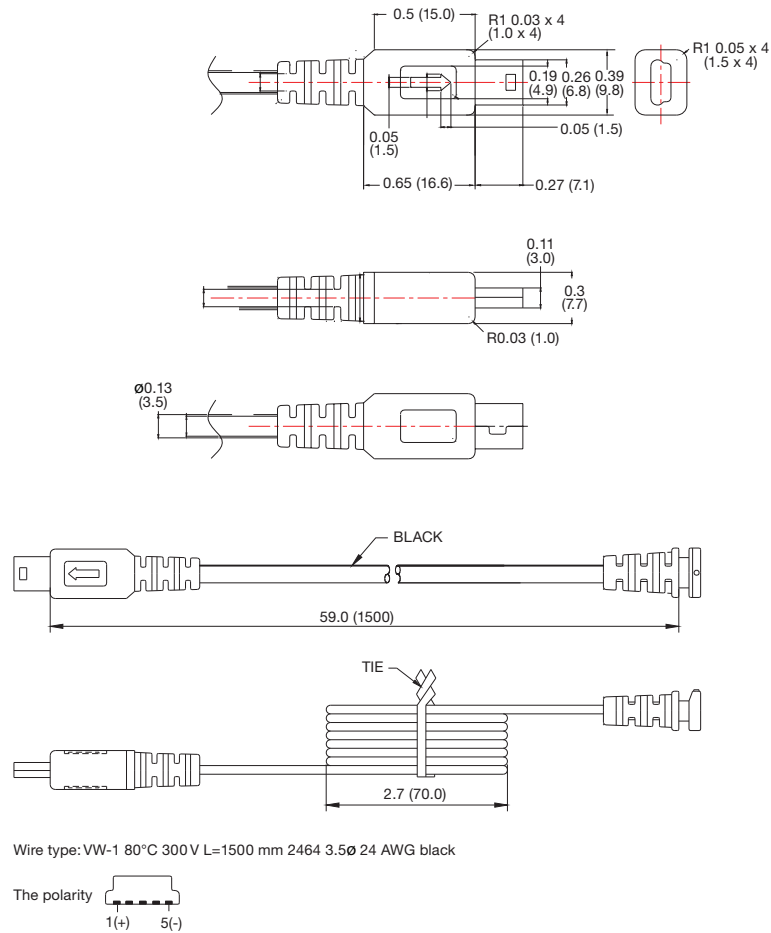


### Mechanical Details

#### Output Lead and Connection - Micro USB Versions (UB)

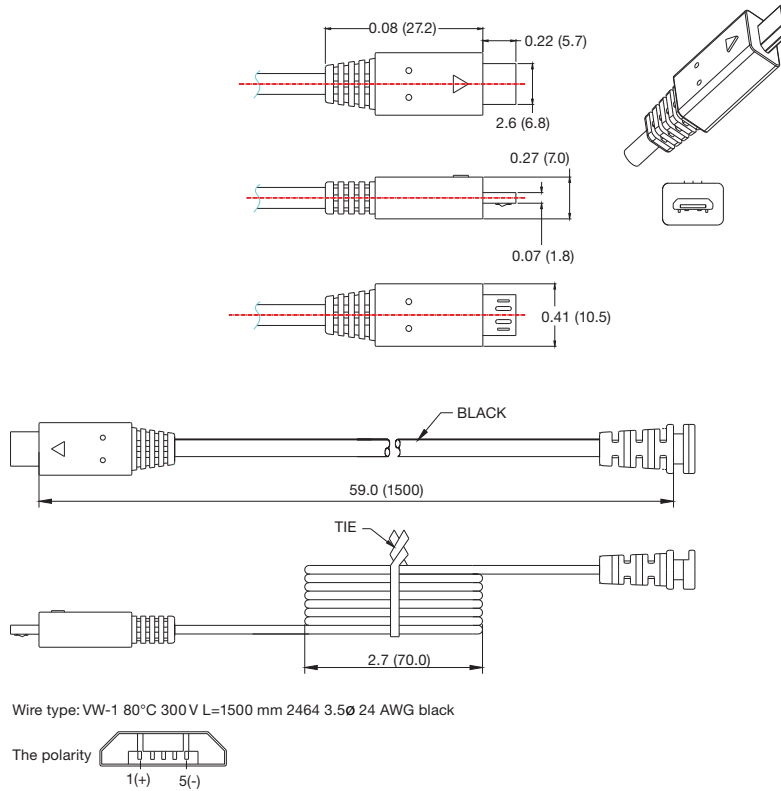

#### Output Lead and Connection - DC Jack Versions (JA)

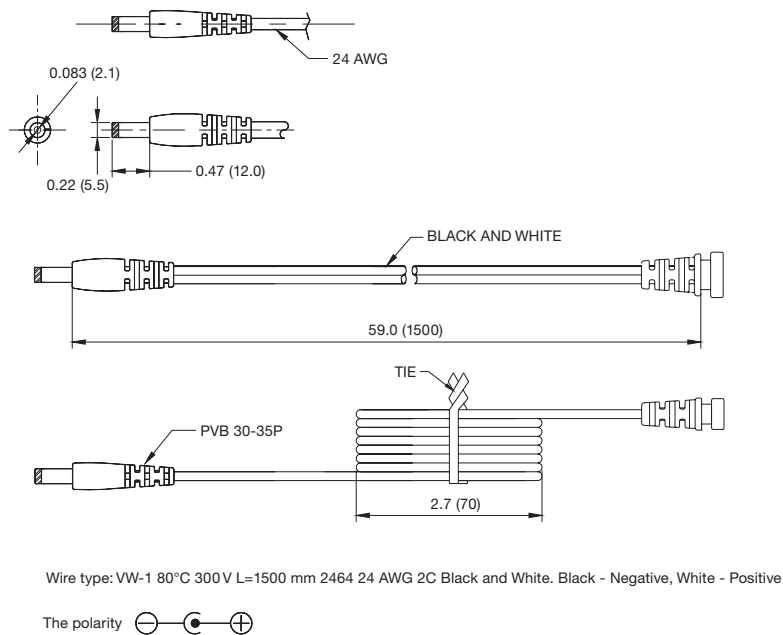



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331