



75W Power over Ethernet Adapter Ultra Power over Ethernet Single Port Injector



Features

- Diagnostic LEDs
- Full Protection OCP, OVP
- 1 Year Warranty
- 25K only on Data Pairs 3,6,1,2 for Detection for Full Power
- Not IEEE BT Compliant
- Gigabit Compatible
- Broken Wire Detection
- Class 4 Operation
- Single Source 4 Pair Power Current Sharing

Applications

- Satellite Receiver
- Wireless Network Access Points
- LCD Displays
- Security Cameras
- Kiosks
- Computer Workstations

Safety Approvals

- cUL/UL
- CE

Mechanical Characteristics

- Length: 166mm (6.53in)
- Width: 80mm (3.15in)
- Height: 44mm (1.73in)
- Weight: 0.5Kg

Output Specifications

Model	DC Output Voltage	Load		Regulation	
		Min.	Max. ¹	Line	Load
POE75U-1UP(PD) ²	56V	0A	0.67A	54-57V DC under all conditions	

Notes

1. Load per output. Output on spare pairs and data pairs is 0.67A for a combined output current of 1.34A.
2. Consult factory for availability

Reference files:

1. [SNMPv2c_User_Manual-Rev1.7.pdf](#)
2. [SNMPv2c_Firmware-Rev1.7.zip](#)
3. [SNMPv2c_MIB_10_30_2009.zip](#)

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**AC Input Voltage Range**

90 to 264VAC

AC Input Voltage Rating

100 to 240VAC, 47-63Hz

AC Input Current

2.0A (RMS) max for 90VAC

1.2A (RMS) max for 240VAC

Leakage Current

3.5mA max @ 254VAC 60Hz

AC Inrush Current

30A (RMS) max for 115VAC

60A (RMS) max for 230VAC

OUTPUT:**Total Output Power**

75W

Ripple and Regulation

250mV max

DC Offset

No data degradation with DC imbalance

18mA per min.

Efficiency

80% (typical) at max load, 120VAC 60Hz

Hold-up Time

10mS min. 120VAC and max load

Transient O/P Voltage Protection

60V max

ENVIRONMENTAL:**Temperature**

Operation -20 to +40°C

Non-operation -25 to +65°C

Humidity 5 to 90%

EMC

Complies with FCC Class B

Complies with EN55032 Class B

Isolation Test

Primary to Secondary: 4242VDC for 1 min10mA

Primary to Field Ground: 2121VDC for 1 min

Output to Field Ground: 2121VDC

Immunity

ESD: EN61000-4-2. Level 3

RS: EN61000-4-3. Level 3

EFT: EN61000-4-4. Level 2

Surge: EN61000-4-5. Level 3

CS: EN61000-4-6. Level 2

Voltage Dips EN61000-4-11

Harmonic: EN61000-3-2 Class A

Insulation Resistance

Primary to Secondary: >10M OHM

500VDC

Primary to Field Ground: >10M OHM

500VDC

Detection

Requires 25K detection on data pairs 3,6(+)

1,2(-) for full power 75W

FEATURES:**Over Voltage/Current, Short Circuit Protection**

The output can be shorted permanently without damage.

Indicators

Green LED 1: DC Power “OK”

Red LED: Fault detected

Green LED 2: Power detected “CONNECT” at 75W

POE75U-1UP-PD Characteristics

WWW.PHIHONG.COM

Input Connector


IEC320 inlet 3 pin

Output Connection

4-pair powering

Pins 3,6, 4,5(+) Pins 1,2, 7,8 (-)

POE75U Design Dimensions (mm)

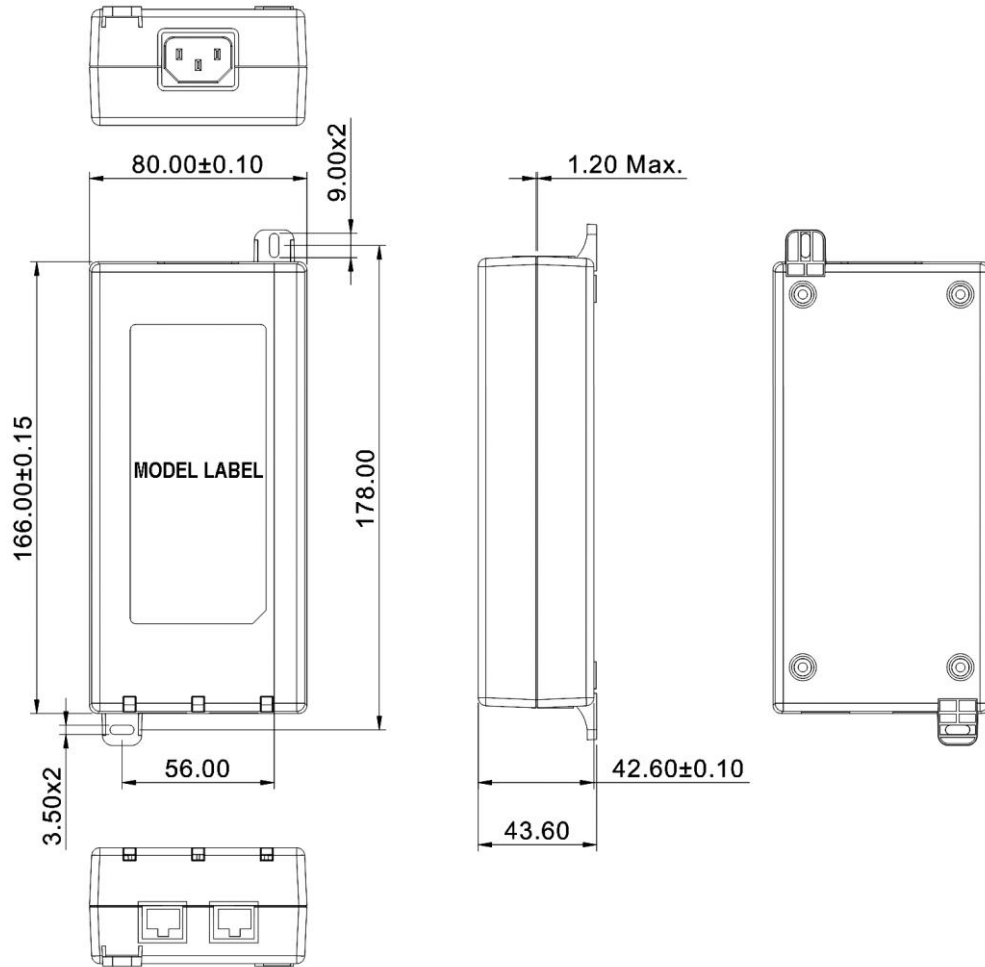

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331