

# MBRB2545CTG, SBRB2545CTG

Preferred Device

## SWITCHMODE Power Rectifier

### D<sup>2</sup>PAK Surface Mount Power Package

The D<sup>2</sup>PAK Power Rectifier is a state-of-the-art device that employs the Schottky Barrier principle with a platinum barrier metal.

#### Features

- Center-Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 175°C Operating Junction Temperature
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Short Heat Sink Tab Manufactured – Not Sheared
- Similar in Size to the Industry Standard TO-220 Package
- AEC-Q101 Qualified and PPAP Capable
- SBRB Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements
- All Packages are Pb-Free\*

#### Mechanical Characteristics


- Case: Epoxy, Molded, Epoxy Meets UL 94 V-0
- Weight: 1.7 Grams (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Device Meets MSL1 Requirements
- ESD Ratings:
  - ◆ Machine Model = C (> 400 V)
  - ◆ Human Body Model = 3B (> 8000 V)




ON Semiconductor®

<http://onsemi.com>

### SCHOTTKY BARRIER RECTIFIER 30 AMPERES, 45 VOLTS



D<sup>2</sup>PAK  
CASE 418B  
STYLE 3



#### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
WW = Work Week  
B2545 = Device Code  
G = Pb-Free Package  
AKA = Diode Polarity

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MBRB2545CTG, SBRB2545CTG

## MAXIMUM RATINGS (Per Leg)

| Rating  | Symbol                          | Value       | Unit             |
|---|---------------------------------|-------------|------------------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                      | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 45          | V                |
| Average Rectified Forward Current<br>(Rated $V_R$ , $T_C = 164^\circ\text{C}$ ) Total Device                | $I_{F(AV)}$                     | 15<br>30    | A                |
| Peak Repetitive Forward Current<br>(Rated $V_R$ , Square Wave, 20 kHz, $T_C = 160^\circ\text{C}$ )          | $I_{FRM}$                       | 30          | A                |
| Non-Repetitive Peak Surge Current<br>(Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz) | $I_{FSM}$                       | 150         | A                |
| Peak Repetitive Reverse Surge Current (2.0 $\mu\text{s}$ , 1.0 kHz)   | $I_{RRM}$                       | 1.0         | A                |
| Storage Temperature Range   | $T_{stg}$                       | -65 to +175 | $^\circ\text{C}$ |
| Operating Junction Temperature (Note 1)   | $T_J$                           | -65 to +175 | $^\circ\text{C}$ |
| Voltage Rate of Change (Rated $V_R$ )   | dv/dt                           | 10,000      | V/ $\mu\text{s}$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. The heat generated must be less than the thermal conductivity from Junction-to-Ambient:  $dP_D/dT_J < 1/R_{\theta JA}$ .

## THERMAL CHARACTERISTICS (Per Leg)

| Characteristic  | Symbol                             | Value     | Unit                      |
|---|------------------------------------|-----------|---------------------------|
| Thermal Resistance,<br>Junction-to-Case<br>Junction-to-Ambient (Note 2) | $R_{\theta JC}$<br>$R_{\theta JA}$ | 1.5<br>50 | $^\circ\text{C}/\text{W}$ |

2. When mounted using minimum recommended pad size on FR-4 board.

## ELECTRICAL CHARACTERISTICS (Per Diode)

| Symbol | Characteristic                            | Condition  | Min | Typ            | Max                          | Unit |
|--------|---|--|-----|----------------|------------------------------|------|
| $V_F$  | Instantaneous Forward Voltage<br>(Note 3) | $I_F = 15 \text{ Amp}$ , $T_J = 25^\circ\text{C}$<br>$I_F = 15 \text{ Amp}$ , $T_J = 125^\circ\text{C}$<br>$I_F = 30 \text{ Amp}$ , $T_J = 25^\circ\text{C}$<br>$I_F = 30 \text{ Amp}$ , $T_J = 125^\circ\text{C}$ | -   | -<br>0.50<br>- | 0.62<br>0.57<br>0.82<br>0.72 | V    |
| $I_R$  | Instantaneous Reverse Current<br>(Note 3) | $V_R = 45 \text{ Volts}$ , $T_J = 25^\circ\text{C}$<br>$V_R = 45 \text{ Volts}$ , $T_J = 125^\circ\text{C}$  | -   | -<br>9.0       | 0.2<br>25                    | mA   |

3. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

## ORDERING INFORMATION

| Device        | Package                         | Shipping <sup>†</sup>   |
|---------------|---------------------------------|-------------------------|
| MBRB2545CTG   | D <sup>2</sup> PAK<br>(Pb-Free) | 50 Units / Rail         |
| SBRB2545CTG   | D <sup>2</sup> PAK<br>(Pb-Free) | 50 Units / Rail         |
| MBRB2545CTT4G | D <sup>2</sup> PAK<br>(Pb-Free) | 800 Units / Tape & Reel |
| SBRB2545CTT4G | D <sup>2</sup> PAK<br>(Pb-Free) | 800 Units / Tape & Reel |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MRB2545CTG, SBRB2545CTG

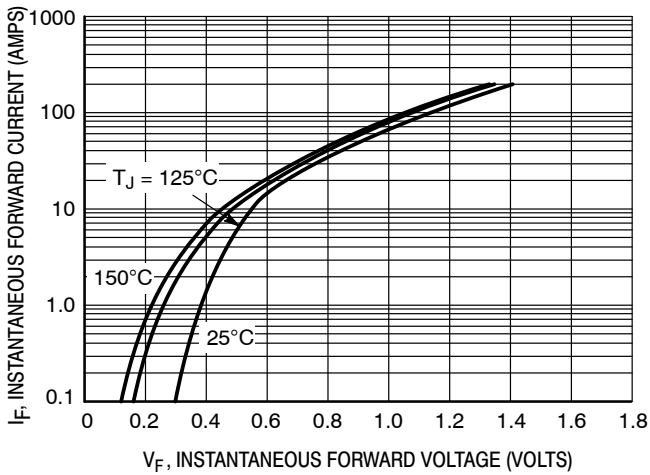


Figure 1. Typical Forward Voltage, Per Leg

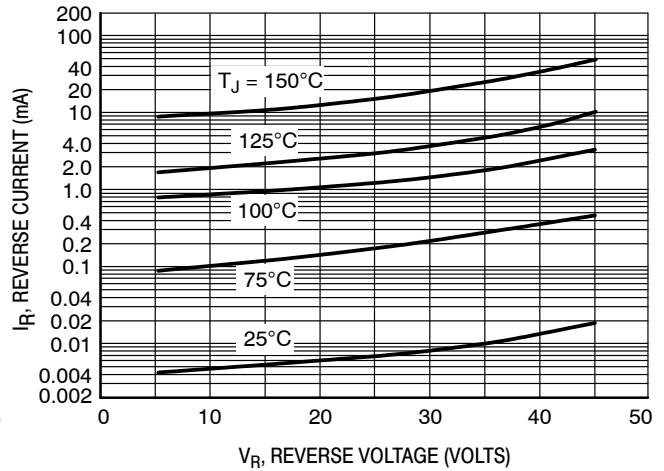


Figure 2. Typical Reverse Current, Per Leg

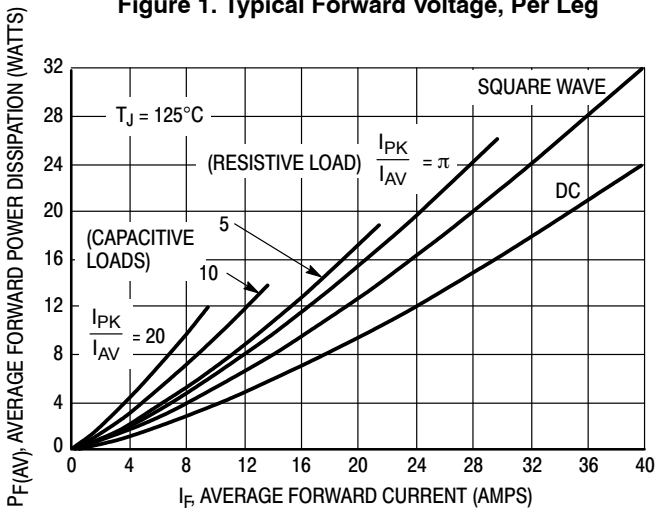


Figure 3. Typical Forward Power Dissipation


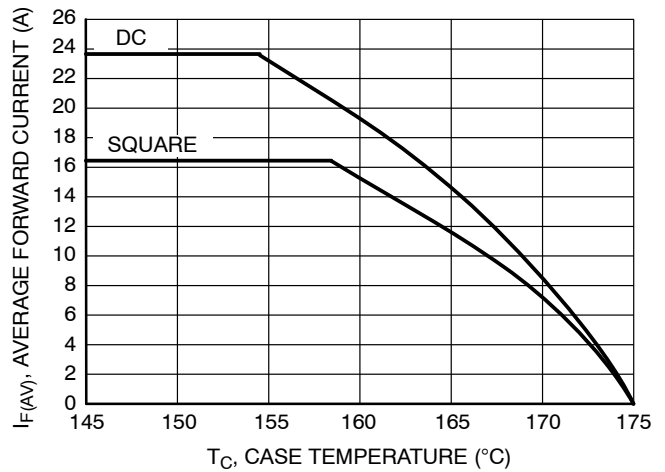


Figure 4. Current Derating, Case per Leg

# MBRB2545CTG, SBRB2545CTG


## PACKAGE DIMENSIONS

D<sup>2</sup>PAK 3  
CASE 418B-04  
ISSUE K

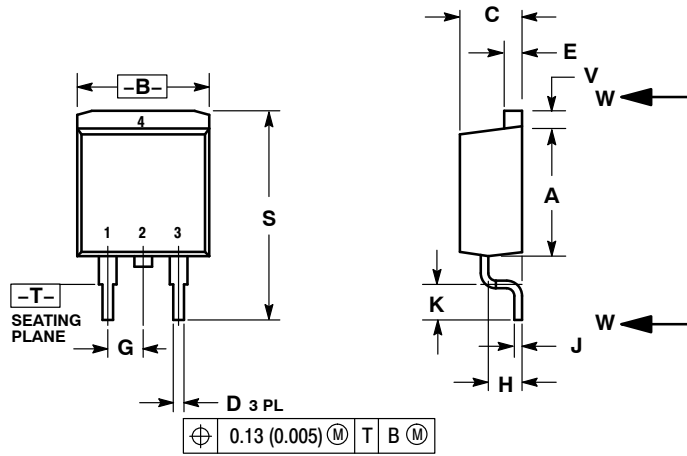


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. 418B-01 THRU 418B-03 OBSOLETE, NEW STANDARD 418B-04.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.340     | 0.380 | 8.64        | 9.65  |
| B   | 0.380     | 0.405 | 9.65        | 10.29 |
| C   | 0.160     | 0.190 | 4.06        | 4.83  |
| D   | 0.020     | 0.035 | 0.51        | 0.89  |
| E   | 0.045     | 0.055 | 1.14        | 1.40  |
| F   | 0.310     | 0.350 | 7.87        | 8.89  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.080     | 0.110 | 2.03        | 2.79  |
| J   | 0.018     | 0.025 | 0.46        | 0.64  |
| K   | 0.090     | 0.110 | 2.29        | 2.79  |
| L   | 0.052     | 0.072 | 1.32        | 1.83  |
| M   | 0.280     | 0.320 | 7.11        | 8.13  |
| N   | 0.197 REF |       | 5.00 REF    |       |
| P   | 0.079 REF |       | 2.00 REF    |       |
| R   | 0.039 REF |       | 0.99 REF    |       |
| S   | 0.575     | 0.625 | 14.60       | 15.88 |
| V   | 0.045     | 0.055 | 1.14        | 1.40  |

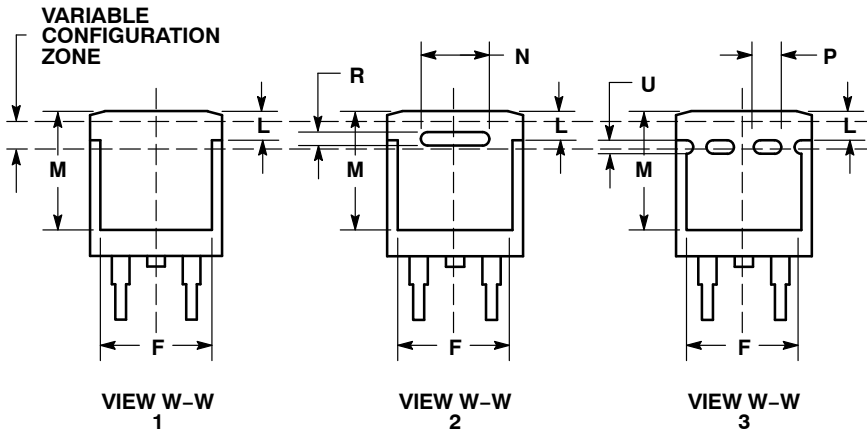

- STYLE 3:  
PIN 1. ANODE  
2. CATHODE  
3. ANODE  
4. CATHODE


### SOLDERING FOOTPRINT\*

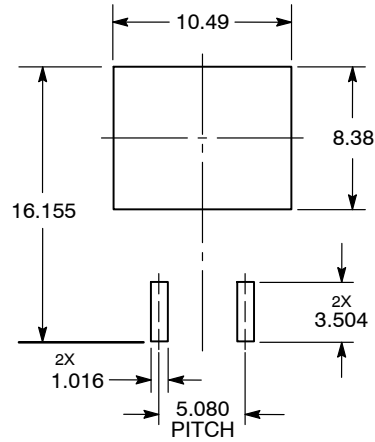

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MBRB2545CTG, SBRB2545CTG

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local  
Sales Representative

**MBRB2545CT/D**



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331