


SPECIFICATION FOR APPROVAL

REF :


PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	


I . CONFIGURATION & DIMENSIONS :

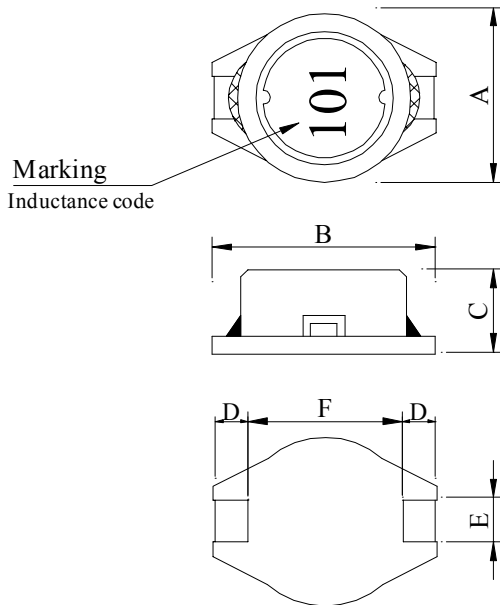

A	: 8.0±0.3	m/m
B	: 10.5±0.3	m/m
C	: 3.7±0.3	m/m
D	: 2.1±0.2	m/m
E	: 2.0±0.2	m/m
F	: 6.0±0.3	m/m
G	: 5.7 ref.	m/m
H	: 2.2 ref.	m/m
I	: 2.4 ref.	m/m




II . SCHEMATIC DIAGRAM :



III . MATERIALS :


- a . Core : Ferrite DR core
- b . Core : Ferrite RI core
- c . Wire : Enamelled copper wire (class F)
- d . Base : LCP E4008
- e . Terminal : Cu/Ni/Sn
- f . Adhesive : Epoxy resin
- g . Remark : Products comply with RoHS' requirements

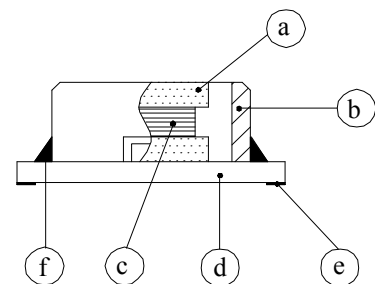

Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 40°C max.
- b . Rated current : Base on temp. rise
& $\Delta L / LOA = 10\%$ max.
- c . Storage temp. : -40°C ---- +125°C
- d . Operating temp. : -40°C ---- +105°C
- e . Resistance to solder heat : 260°C.10 secs.

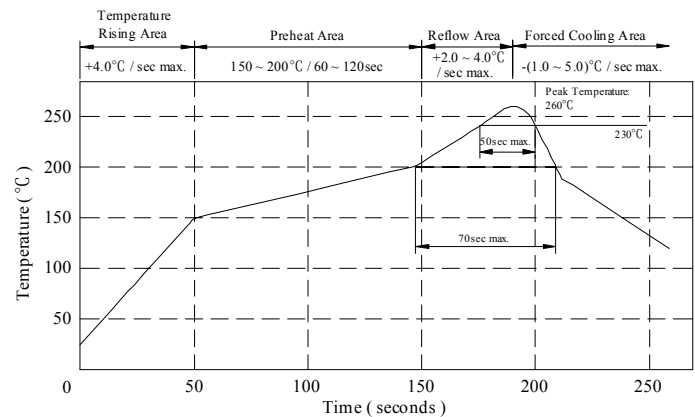

AE-001A

ABC 千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		SRF (MHz) nom.	RDC (Ω) max.	IDC (A) max.
			L	Q			
SS08045R0ML□-□□□	5.0±20%	20	1K	7.960M	45.0	0.080	1.70
SS08047R5ML□-□□□	7.5±20%	20	1K	7.960M	40.0	0.100	1.40
SS0804100ML□-□□□	10.0±20%	38	1K	2.520M	32.0	0.120	1.20
SS0804120ML□-□□□	12.0±20%	38	1K	2.520M	28.0	0.150	1.10
SS0804150ML□-□□□	15.0±20%	38	1K	2.520M	25.0	0.170	1.00
SS0804180YL□-□□□	18.0±15%	35	1K	2.520M	23.0	0.190	0.90
SS0804220YL□-□□□	22.0±15%	30	1K	2.520M	22.0	0.250	0.80
SS0804270YL□-□□□	27.0±15%	28	1K	2.520M	18.0	0.270	0.70
SS0804330YL□-□□□	33.0±15%	26	1K	2.520M	17.0	0.300	0.65
SS0804390YL□-□□□	39.0±15%	26	1K	2.520M	16.0	0.380	0.60
SS0804470KL□-□□□	47.0±10%	24	1K	2.520M	14.0	0.460	0.55
SS0804560KL□-□□□	56.0±10%	24	1K	2.520M	12.0	0.600	0.50
SS0804680KL□-□□□	68.0±10%	22	1K	2.520M	11.0	0.700	0.45
SS0804820KL□-□□□	82.0±10%	20	1K	2.520M	10.0	0.800	0.40
SS0804101KL□-□□□	100.0±10%	50	1K	796K	9.0	0.950	0.37
SS0804121KL□-□□□	120.0±10%	50	1K	796K	8.5	1.000	0.35
SS0804151KL□-□□□	150.0±10%	53	1K	796K	7.0	1.300	0.30
SS0804181KL□-□□□	180.0±10%	53	1K	796K	6.0	1.450	0.28
SS0804221KL□-□□□	220.0±10%	55	1K	796K	5.5	1.900	0.24
SS0804271KL□-□□□	270.0±10%	50	1K	796K	5.5	2.150	0.22
SS0804331KL□-□□□	330.0±10%	60	1K	796K	5.0	2.800	0.19
SS0804391KL□-□□□	390.0±10%	55	1K	796K	4.5	3.300	0.17
SS0804471KL□-□□□	470.0±10%	50	1K	796K	4.0	3.600	0.16

1). □ : Packaging information... ☐A: Bulk ☐B: Taping Reel

2). "-□□□":Reference code


SPECIFICATION FOR APPROVAL

REF :

PAGE: 3

PROD.	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
NAME		ABC'S ITEM NO.	

VI . INDUCTANCE VS. DC CURRENT CURVE :

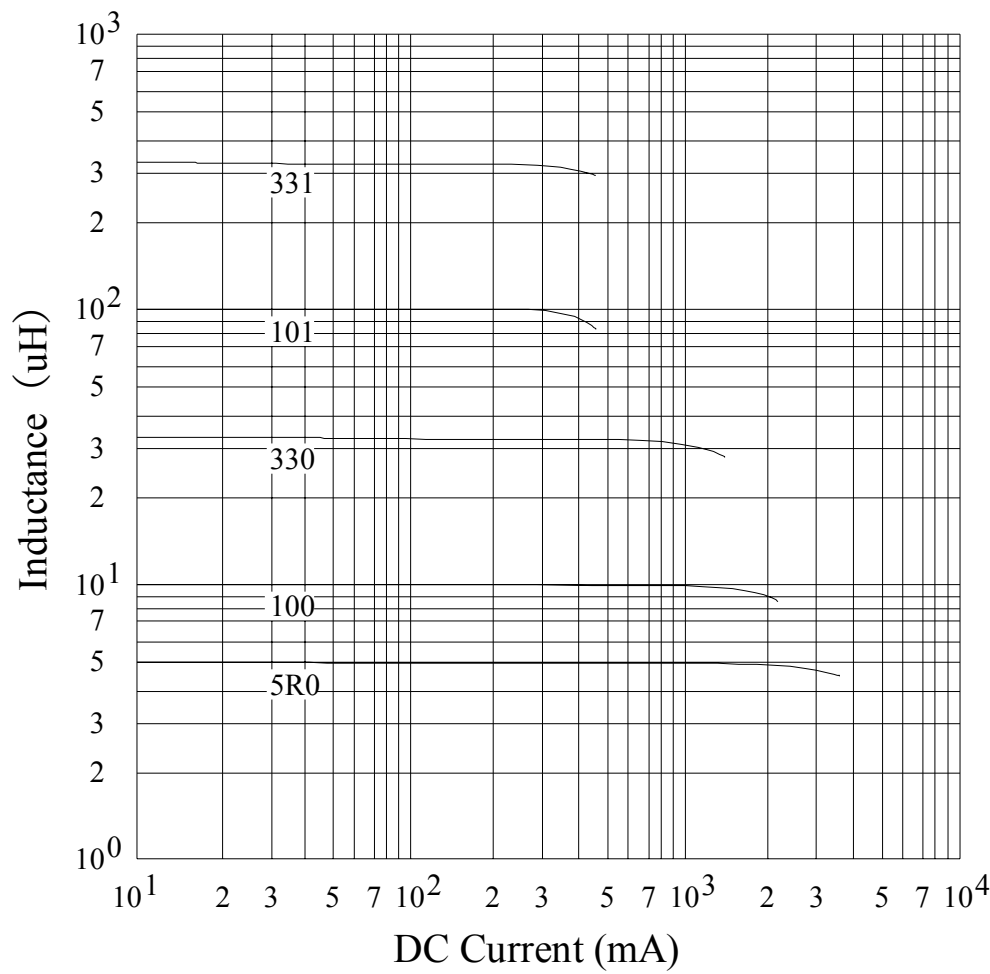

SPECIFICATION FOR APPROVAL



REF :

PAGE: 4

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

VII . PACKAGING INFORMATION :

(1) Configuration

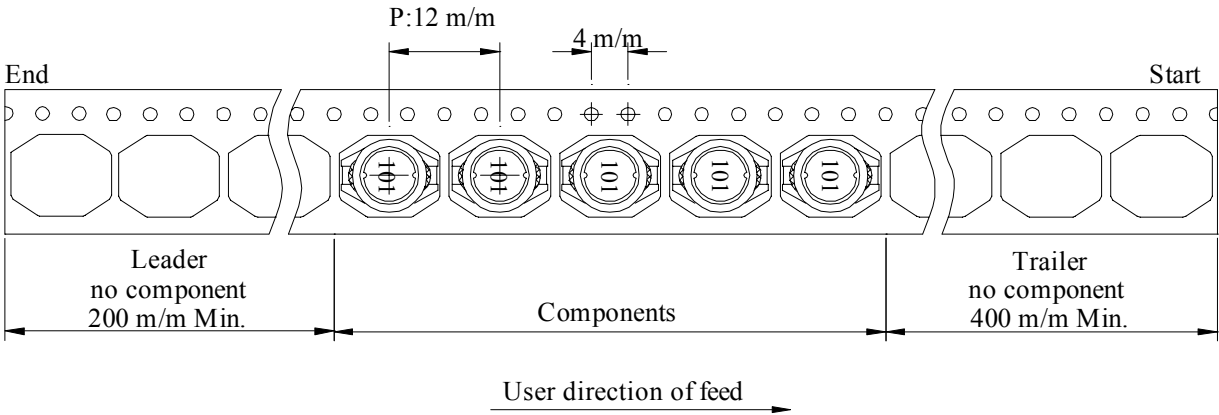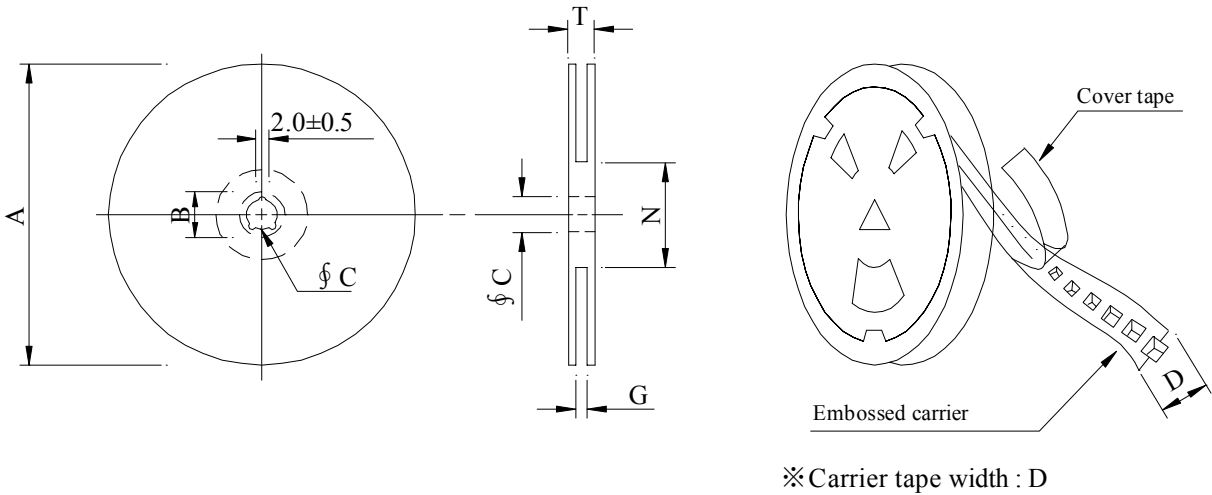

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 16	330	21±0.8	13	16	18 ⁺⁰	50 ⁻⁰	22.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SS0804	1,000	1,100	13 - 16	6,000	7.5	40 x 40 x 24

AE-001A


SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . DWGING NUMBER EXPRESSION :

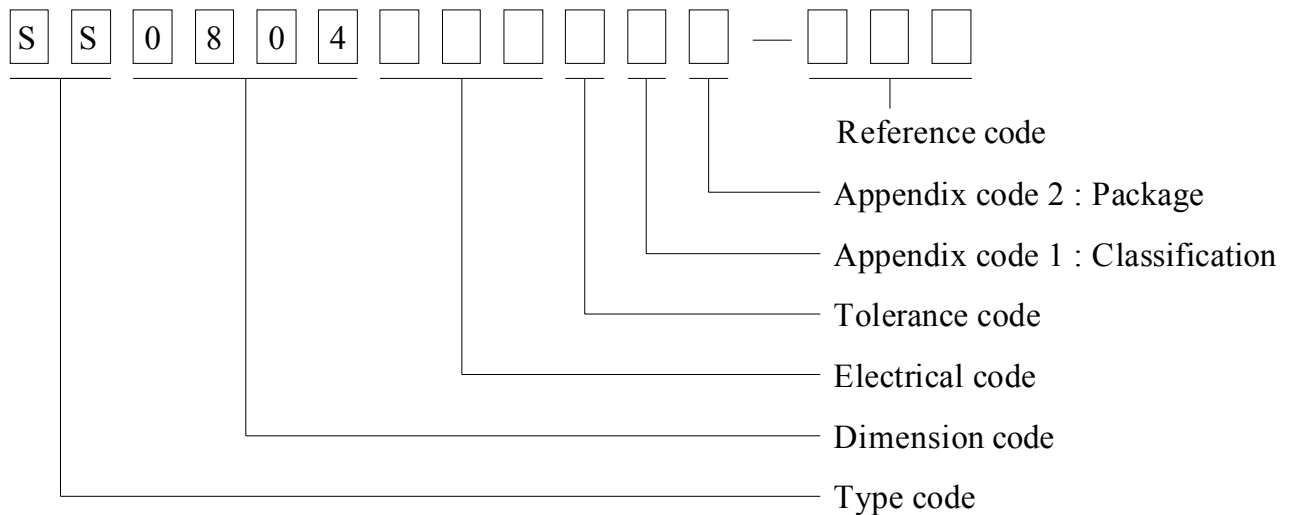

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	1000 pcs	

AE-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD.	SHIELDED SMD	ABC'S DWG NO.	SS0804□□□□L□-□□□
NAME	POWER INDUCTOR	ABC'S ITEM NO.	

IX . RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 90% of the terminal electrode Shall be covered With fresh solder.	Preheat : $150\pm 25^{\circ}\text{C}$ for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : $235\pm 5^{\circ}\text{C}$ Flux : Rosin Dip time : 4 ± 1 seconds
Thermal shock test (Temp. cycle)	Inductance shall not change more than $\pm 20\%$	Room temp. $\longrightarrow$ $-25\pm 2^{\circ}\text{C}$ 15 minutes $\longrightarrow$ 30 minutes Room temp. $\longrightarrow$ $85\pm 2^{\circ}\text{C}$ 15 minutes $\longrightarrow$ 30 minutes Total : 50 cycles
Humidity Resistance test		Temperature : $40\pm 2^{\circ}\text{C}$ Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours
High temp. Resistance test		Temperature : $105\pm 2^{\circ}\text{C}$ Applied current : Per spec. Time : 500 hours

AE-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 7

PROD.	SHIELDED SMD	ABC'S DWG NO.	SS0804□□□□L□-□□□
NAME	POWER INDUCTOR	ABC'S ITEM NO.	

X . UL CARD :

OBMW2		September 8, 2000	
Magnet Wire-Component			
JUNG SHING WIRE CO LTD		E174837	
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN			
HSIEN TAIWAN			

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
EIAIW	—	Polyesterimide	Polyamideimide	—	MW35C	200
EILOCKY	—	Polyesterimide	Polyamide	—	—	180
EILOCKW	—	Polyesterimide	Modified Epoxy	—	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	Polyamide	—	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	Nylon	—	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002

Page 1 of 2

A not-for-profit organization dedicated to public safety and committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	Polyamide	—	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	Nylon	—	MW28-C	130
UEY-2	—	Polyurethane	Polyamide	—	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.
 LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZI - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
 For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002

Page 2 of 2

OBMW2/E174837
 September 8, 2000

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 8

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	


SUMITOMO CHEMICAL CO LTD
5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN

E54705 (M)

Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI		H W I	H A I	H V T R	D 4 9 5	C T I
					Mech with Imp	w/o Imp					
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)											
E4008 , E400X	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
E4008	NC , WT , BK	3.0	94V-0	130	130	130	1	4	0	5	4
		0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
E4010	NC , BK	1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
		0.30	94V-0	130	130	130	—	—	—	—	—
E400(Y)L , E4008L	NC , BK	0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E4810	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
		0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4

(X) Denotes any number 1 thru 9.
(Y) Denotes any number 1 thru 7.

AE-001A





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331