

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


0676430910

Status:

Active

Description:

Universal Serial Bus (USB) Shielded I/O Receptacle, Right Angle, Type A, Black Polyester, Gold (Au) Flash, PCB Thickness 1.60mm (.063"), without Upper Flange, Lead Free

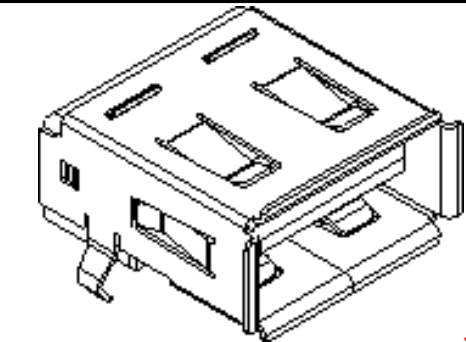

Series
image - Reference only

Documents:

3D Model

Drawing (PDF)

[Product Specification PS-67643-003 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	I/O Connectors
Series	67643
Application	Wire-to-Board
Comments	Without Upper Flange Not for IR Reflow Process
Component Type	Receptacle
Product Name	USB
Type	A

Physical

Boot Color	N/A
Circuits (Loaded)	4
Circuits (maximum)	4
Gender	Receptacle
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	1
Orientation	Right Angle
PC Tail Length (in)	0.102 In
PC Tail Length (mm)	2.60 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Panel Mount	Yes
Pitch - Mating Interface (in)	0.079 In, 0.098 In
Pitch - Mating Interface (mm)	2.00 mm, 2.50 mm
Pitch - Term. Interface (in)	0.079 In, 0.098 In
Pitch - Term. Interface (mm)	2.00 mm, 2.50 mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole
Waterproof / Dustproof	No

Electrical

Current - Maximum per Contact	1.5A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	30V DC

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
67643Series

Mates With
USB Type A Plug

Solder Process Data

Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260



Material Info

Reference - Drawing Numbers


Product Specification	PS-67643-003
Sales Drawing	SD-67643-003

This document was generated on 03/31/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

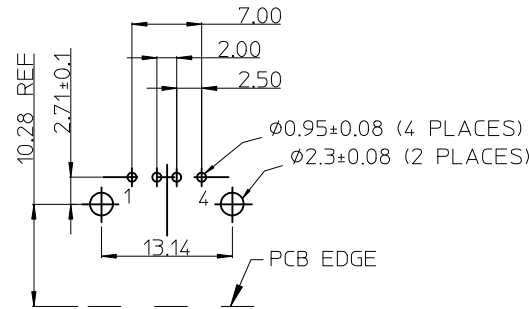

PCB LAYOUT (TOP VIEW)

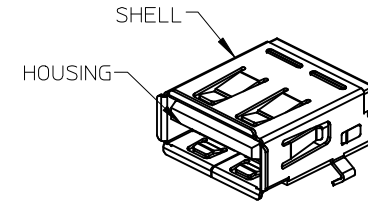

NOTES:

1. MATERIAL:

- ① METAL SHELL: COPPER ALLOY.
- ② HOUSING: SEE CHART, 30% GLASS FIBER FILLED, UL94-V0.
- ③ TERMINAL: PHOSPHOR BRONZE

2. TERMINAL:

CONTACT AREA: (a) GOLD FLASH.

(b) GOLD (Au), THICKNESS=30 MICROINCH MINIMUM.

SOLDER TAIL: TIN PLATED, THICKNESS=75 MICROINCH MINIMUM.

UNDER PLATED: NICKEL (Ni), THICKNESS=50 MICROINCH MINIMUM.

METAL SHELL: SEE CHART.

3. RECOMMENDED PCB THICKNESS: SEE CHART

4. PRODUCT SPECIFICATION: FOR IR REFER TO PS-67643-002

FOR NON IR REFER TO PS-67643-003



5. TORQUE FORCE SPEC: 2.50kg-cm Min, MEASURED AT BROKEN POINT.

6. TEST SUMMARY: FOR IR REFER TO TS-67643-002

FOR NON IR REFER TO TS-67643-003

7. PACKAGE: REFER TO PK-67643-002

8. LEAD FREE AND ROHS COMPLIANT PRODUCT

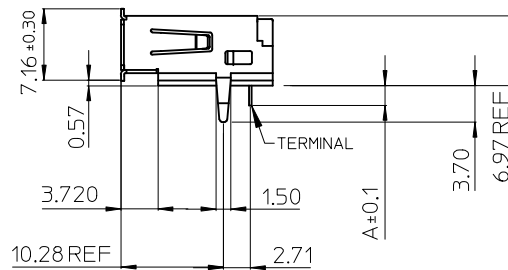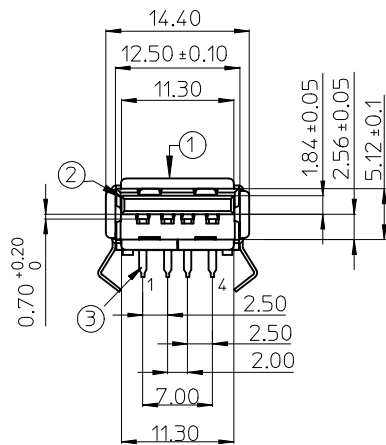

REVISED	EC NO: DRWN:YPMU CHKD: APPR:	2009/08/28	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
						mm	INCH	DRAWN BY IVY-LIN	DATE 2005/03/31	TITLE USB A TYPE RCPT SINGLE RA THROUGH HOLE W/OFLG (LEAD-FREE VERSION)	MOLEX MOLEX INCORPORATED		
					4 PLACES	± ---	± ---	CHECKED BY	DATE				
					3 PLACES	± ---	± ---	ALL IN	2005/03/31				
					2 PLACES	± 0.25	± ---	APPROVED BY	DATE				
					1 PLACE	± 0.25	± ---	MWSCHANG	2005/03/31				
					ANGULAR ± 3 °			MATERIAL NO.		DOCUMENT NO.		SHEET NO. 1 OF 2	
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE SHEET2		SD-67643-003			
								SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

7

6

5

4

3

2

1

E

D

C

B

A

P/N	HOUSING MATERIAL	COLOR	CONTACT PLATING	METAL SHELL PLATING	REMARK
67643-0910	POLYESTER	BLACK	GOLD FLASH	IR REFLOW PROCESS MATTE TIN PLATED AT SOLDER AREA THICKNESS=100 MICROINCH MINIMUM UNDER PLATE:NICKEL (Ni),(SOLDERING AVAILABLE)	NON IR
67643-1910	POLYESTER	WHITE			REFLOW PROCESS
67643-2910	HIGH TEMPERATURE NYLON	BLACK			FOR IR
67643-3910	HIGH TEMPERATURE NYLON	WHITE			REFLOW PROCESS
67643-0911	POLYESTER	BLACK	GOLD PLATING 30 MICROINCH	NON IR REFLOW PROCESS: MATTE TIN PLATED. THICKNESS=80 MICROINCH MINIMUM UNDER PLATE:NICKEL (Ni).	NON IR
67643-1911	POLYESTER	WHITE			REFLOW PROCESS
67643-2911	HIGH TEMPERATURE NYLON	BLACK			FOR IR
67643-3911	HIGH TEMPERATURE NYLON	WHITE			REFLOW PROCESS
PCB THICKNESS		1.60±0.05			
DIMENSION "A"		2.60			

P/N	HOUSING MATERIAL	COLOR	CONTACT PLATING	METAL SHELL PLATING	REMARK
67643-0930	HIGH TEMPERATURE NYLON	BLACK	GOLD FLASH	FOR IR REFLOW PROCESS MATTE TIN PLATED AT SOLDER AREA THICKNESS=100 MICROINCH MINIMUM UNDER PLATE:NICKEL (Ni),(SOLDERING AVAILABLE)	FOR IR REFLOW PROCESS
67643-1930	HIGH TEMPERATURE NYLON	WHITE			
67643-0931	HIGH TEMPERATURE NYLON	BLACK	GOLD PLATING		
67643-1931	HIGH TEMPERATURE NYLON	WHITE	30 MICROINCH		
PCB THICKNESS		1.20±0.05			
DIMENSION "A"		2.00			

REVISED EC NO: DRWN:YPU CHKD: APPR:	2009/08/28	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
					mm	INCH	DRAWN BY	DATE	TITLE USB A TYPE RCPT SINGLE RA THROUGH HOLE W/OFLG (LEAD-FREE VERSION)			
				4 PLACES	± ---	± ---	IVY-LIN	2005/03/31				
				3 PLACES	± ---	± ---	CHECKED BY	DATE				
				2 PLACES	± 0.25	± ---	ALL IN	2005/03/31				
				1 PLACE	± 0.25	± ---	APPROVED BY	DATE				
				ANGULAR ± 3 °			WWSCHANG	2005/03/31	 MOLEX INCORPORATED			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.			DOCUMENT NO.		SHEET NO.
							SEE TABLE			SD-67643-003		2 OF 2
							SIZE A 4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331