

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0424106314

Status:

Active

Overview:

modular_plugs_jacks

Description:

Modular Jack, Vertical, 6/4

Documents:

3D Model

Drawing (PDF)

Product Specification PS-42410 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

42410

Comments

Flush Mount|Flangeless|2 PCB Thick

Component Type

PCB Jack

Magnetic

No

Overview

modular_plugs_jacks

Performance Category

3

Power over Ethernet (PoE)

N/A

Product Name

RJ11

Physical

Color - Resin

Black

Durability (mating cycles max)

500

Flammability

94V-0

Inverted / Top Latch

N/A

Lightpipes/LEDs

None

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Polyester

Orientation

Vertical (Top Entry)

PCB Retention

Yes

PCB Thickness Recommended (in)

0.125 In

PCB Thickness Recommended (mm)

3.20 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.050 In

Pitch - Mating Interface (mm)

1.27 mm

Plating min: Mating (µin)

50

Plating min: Mating (µm)

1.25

Plating min: Termination (µin)

100

Plating min: Termination (µm)

2.5

Ports

1

Positions / Loaded Contacts

6/4

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40°C to +80°C

Termination Interface: Style

Through Hole

Wire/Cable Type

N/A

Electrical

Current - Maximum per Contact


1.5A

Shielded

No

Voltage - Maximum

125V



Series

image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

42410Series

Mates With

FCC 68 Plugs

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-42410-492
Product Specification	PS-42410
Sales Drawing	SDA-42410-****
Test Summary	TS-42878-001

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20

19

18

17

16

15

14

13

12

11

42410

9

8

7

6

5

4

3



2

1


NOTES:

- 1) MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED UL 94 V-0. COLOR IS BLACK, TERMINALS ARE .015/(0.38) THICK PHOSPHOR BRONZE.
- 2) TERMINAL PLATING OPTIONS PER ES-88-***:
- A - SELECT GOLD IN CONTACT AREA: 50 MICRONS MIN.
 - *SELECT TIN IN PC TAIL AREA: 100 MICRONS MIN.
 - WITH OVERALL NICKEL UNDERPLATE: 50 MICRONS MIN.
 - B - SELECT GOLD IN CONTACT AREA: 15 MICRONS MIN.
 - *SELECT TIN IN PC TAIL AREA: 100 MICRONS MIN.
 - WITH OVERALL NICKEL UNDERPLATE: 50 MICRONS MIN.
- *THE PRIMARY SHIPPING CARTON WILL BE LABELED 'COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC'. CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD IN THE PC TAIL.
- 3) THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
- 4) CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
- 5) ALL JACKS ARE DESIGNED TO BE USED WITH .062/(1.57) OR .125/(3.18) THICK P.C. BOARDS.
- 6) ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICRONS GOLD.
- 7) ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
- 8) SEE SHEETS 1 & 4 FOR CONNECTOR SIZE 4.
- 9) SEE SHEETS 3 & 4 FOR CONNECTOR SIZE 8.
- 10) SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
- 11) THIS MODULAR JACK ASSEMBLY IS ALSO AVAILABLE IN A UL 94V-0 RATED, GLASS-FILLED NYLON. (SEE MOLEX DRAWING SDA-43576)
- 12) ENGRAVED NUMBERS ON HOUSING BODY ARE FOR MOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
- 13) ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

P.C. BOARD THICKNESS	DIM. 'D' (MTG. PEGS)	DIM. 'F' (P.C. TAILS)	CONNECTOR SIZE	CIRCUIT SIZE	DIM. 'G'
0.062/(1.57)	.128 (3.25)	.120 +.015/-.025 (3.05 +.38/-.63)	6	6	.250 (6.35)
0.125/(3.18)	.191 (4.85)	.205 +.015/-.025 (5.21 +.38/-.63)	6	4	.150 (3.81)
			6	2	.050 (1.27)

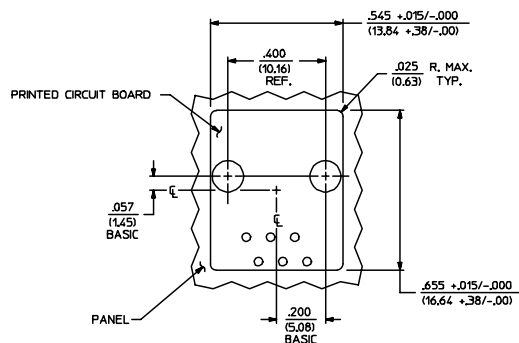



PANEL CUT-OUT FOR CONNECTOR SIZE 6

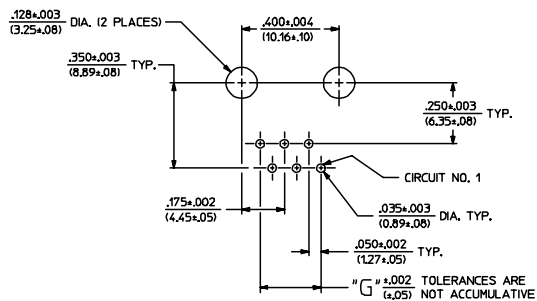

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 6

MOUNTING EARS ARE OPTIONAL

CIRCUIT NO. 1 (LOCATED AT THIS END OF CONNECTOR)

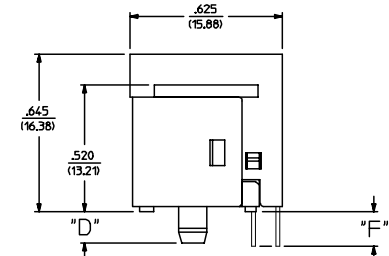

SIZE 6 MODULAR JACK LOADED WITH 6 TERMINALS SHOWN ABOVE
(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

SEE SHEET ONE EC NO: UFP2004-667 DRAWN:LSCHMDT 2004/03/03 CHKD:LSCHMDT 2004/03/03 APPR:FSMITH 2004/03/03 N	QUALITY SYMBOLS DESCRIPTION 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	TITLE ASSEMBLY, VERTICAL MODULAR JACKS (CONNECTOR SIZE 6) MOLEX INCORPORATED	MATERIAL NO. DOCUMENT NO. SHEET NO. 2 OF 4
		4 PLACES	±	±	IN/MM			
		3 PLACES	±	±				
		2 PLACES	±	±				
REV	DESCRIPTION	1 PLACE	±	±		DRAWN BY GLT CHECKED BY BAP APPROVED BY RAS	DATE 1990/10/12 1990/10/12 1990/10/12	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
		ANGULAR ±1/2°						
		DRAFT WHERE APPLICABLE						
		MUST REMAIN WITHIN DIMENSIONS						

	20	19	18	17	16	15	14	13	12	11	42410	9	8	7	6	5	4	3	2	1					
	SIZE 4 VERTICAL MODJACK ASSEMBLIES						SIZE 8 VERTICAL MODJACK ASSEMBLIES																		
	PART CHARACTERISTICS						PART CHARACTERISTICS																		
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	KEYING OPTION	MOUNTING EARS OPTION	TERMINAL PLATING OPTION												
	42410-4168	4 POS. BODY	4	.062/(1.57)	YES	A	42410-8312	8 POS. BODY	8	.062/(1.57)	NO	YES	A												
	42410-4170	↑	↑	.062/(1.57)	NO	A	42410-8314	↑	↑	.062/(1.57)	NO	NO	A												
	42410-4264	↓	↓	.125/(3.18)	YES	A	42410-8360	↑	↑	.062/(1.57)	YES	YES	A												
	42410-4266	4 POS. BODY	4	.125/(3.18)	NO	A	42410-8362	↑	↑	.062/(1.57)	YES	NO	A												
							42410-8504	↑	↑	.125/(3.18)	NO	YES	A												
	42410-4312	4 POS. BODY	2	.062/(1.57)	YES	A	42410-8506	↑	↑	.125/(3.18)	NO	NO	A												
	42410-4314	↑	↑	.062/(1.57)	NO	A	42410-8552	↓	↓	.125/(3.18)	YES	YES	A												
	42410-4408	↓	↓	.125/(3.18)	YES	A	42410-8554	8 POS. BODY	8	.125/(3.18)	YES	NO	A												
	42410-4410	4 POS. BODY	2	.125/(3.18)	NO	A																			
							42410-8600	8 POS. BODY	6	.062/(1.57)	NO	YES	A												
							42410-8602	↑	↑	.062/(1.57)	NO	NO	A												
							42410-8648	↑	↑	.062/(1.57)	YES	YES	A												
							42410-8650	↑	↑	.062/(1.57)	YES	NO	A												
							42410-8792	↑	↑	.125/(3.18)	NO	YES	A												
							42410-8794	↑	↑	.125/(3.18)	NO	NO	A												
							42410-8840	↓	↓	.125/(3.18)	YES	YES	A												
							42410-8842	8 POS. BODY	6	.125/(3.18)	YES	NO	A												
							42410-8888	8 POS. BODY	4	.062/(1.57)	NO	YES	A												
							42410-8890	↑	↑	.062/(1.57)	NO	NO	A												
							42410-8936	↑	↑	.062/(1.57)	YES	YES	A												
							42410-8938	↑	↑	.062/(1.57)	YES	NO	A												
							42410-9080	↑	↑	.125/(3.18)	NO	YES	A												
							42410-9082	↑	↑	.125/(3.18)	NO	NO	A												
							42410-9128	↓	↓	.125/(3.18)	YES	YES	A												
							42410-9130	8 POS. BODY	4	.125/(3.18)	YES	NO	A												
							42410-9176	8 POS. BODY	2	.062/(1.57)	NO	YES	A												
							42410-9178	↑	↑	.062/(1.57)	NO	NO	A												
							42410-9224	↑	↑	.062/(1.57)	YES	YES	A												
							42410-9226	↑	↑	.062/(1.57)	YES	NO	A												
							42410-9368	↑	↑	.125/(3.18)	NO	YES	A												
							42410-9370	↑	↑	.125/(3.18)	NO	NO	A												
							42410-9416	↓	↓	.125/(3.18)	YES	YES	A												
							42410-9418	8 POS. BODY	2	.125/(3.18)	YES	NO	A												



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331