

### Surge Protected, Single Input, Dual Output Load Switch with OVP

#### Features

- Single Input, Dual Output Low On-Resistance Switch
  - ▶ VBUS to OUT: typ. 21mΩ
  - ▶ VBUS to BAT: typ. 12.5mΩ (Reverse Blocking)
- Wide Input Voltage Range: 2.7V – 13.5V
  - ▶ VBUS Abs Max: 28V
- Surge and ESD Protected Input
  - ▶ Surge Protection
    - IEC61000-4-5: > ±100V
  - ▶ ESD Protection
    - IEC61000-4-2 (Level 4) VBUS
      - Contact: ±8kV
      - Air Gap: ±15kV
    - HBM: 2kV All Pins
- Selectable Over-Voltage Protection (OVP)
  - ▶ KTS1679: VBUS to OUT: 13.9V ±400mV or 5.8V ±200mV
  - ▶ KTS1679-1: VBUS to OUT: 10.4V ±300mV or 5.8V ±200mV
  - ▶ VBUS to BAT: 5.8V ±200mV
- Maximum Continuous Current
  - ▶ VBUS to OUT: 3.5A
  - ▶ VBUS to BAT: 6A
- Dual Enable Control
  - ▶ Active LOW VBUS to OUT
  - ▶ Active HIGH VBUS to BAT
- Battery OVP Sense Pin
- VBUS to BAT FLAG
- Over Temperature Protection
- Pb-free 28-Bump, WLCSP 2.96mm x 1.67mm
- -40°C to 85°C Operating Temperature Range

#### Brief Description

The KTS1679 features two low resistance power switches configured as single input, dual output, change-over switch. The input to both switches is protected against VBUS surge voltages of up to ±100V, and is also protected against over-voltage, with preset trip points on both the VBUS to OUT and VBUS to BAT paths, providing protection to downstream components from abnormal input conditions.

The main switch (VBUS to OUT) features a unidirectional active –low enabled 3.5A rated MOSFET, with a selectable OVP trip point of 13.9V ±400mV or 5.8V ±200mV or 10.4V ±300mV or 5.8V ±200mV for KTS1679-1. The secondary switch (VBUS to BAT) is an active-HIGH enabled, reverse-blocking 6.0A rated MOSFET, with an OVP trip point of 5.8V ±200mV. The input to both switches is rated up to a maximum of 28V. A CMOS FLAG pin signals when VBUS to OUT switch is enabled.

The KTS1679 also features an OVP battery sense pin to prevent damage to the battery during charge, and also integrates over-temperature thermal shutdown protection. The over-voltage status will be latched and FLAG will be pulled LOW to indicate the fault. To reset this channel, EN2 is required to toggle from LOW to HIGH.

The KTS1679 is packaged in advanced, fully “green” compliant, 2.96mm x 1.67mm, Wafer-Level Chip-Scale Package (WLCSP).

#### Applications

- Smartphones and Tablets
- Mobile Internet Devices
- Wearables, Portable Devices


#### Ordering Information

Part Number	Marking <sup>1</sup>	SEL	VBUS to OUT OVP	VBUS to BAT OVP	Operating Temperature	Package
KTS1679EUQ-TR <sup>2</sup>	XXYYZZ	FLOAT	13.9V ±0.4V	5.8V ±0.2V	-40°C to +85°C	WLCSP28
		GND	5.8V ±0.2V			
KTS1679EUQ-1-TR	JZYYZZ	FLOAT	10.4V ±0.3V			
		GND	5.8V ±0.2V			

1. “XXYYZZ” or “JZYYZZ” is the device ID, date code and assembly code.

2. Contact sales for availability

### Typical Application

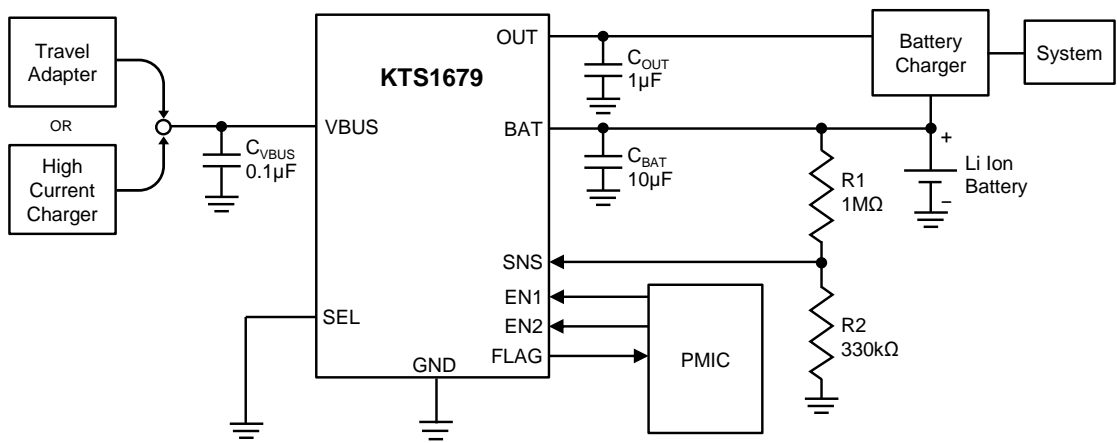

Kinetic Technologies cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Kinetic Technologies product. No intellectual property or circuit patent licenses are implied. Kinetic Technologies reserves the right to change the circuitry and specifications without notice at any time.



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331