

# Non-Contacting Hall Effect Single Turn Position Sensor



## 6120 Series

**Features:**

- 7/8" diameter
- Non-contacting
- Hall Effect
- Single turn
- Multiple styles available
- Custom models available



**Description:**

The BI Technologies line of single-turn non-contacting hall-effect position sensors is 7/8" in diameter. Custom models are available. The hall-effect technology used makes this set of position sensors ideal for harsh environments where shock levels, vibration and temperature.


**Applications:**

- Industrial grade joystick
- HVAC controls

### Model Styles Available

|           |                                                                            |
|-----------|----------------------------------------------------------------------------|
| 6121      | 1/8" Shaft, 1/4" Bushing                                                   |
| 6126      | 1/8" Shaft, 3/8" Bushing                                                   |
| 6127      | 1/4" Shaft, 3/8" Bushing                                                   |
| 612x-XXXX | Custom models are available; Contact Customer Service for special features |

### Ordering Information

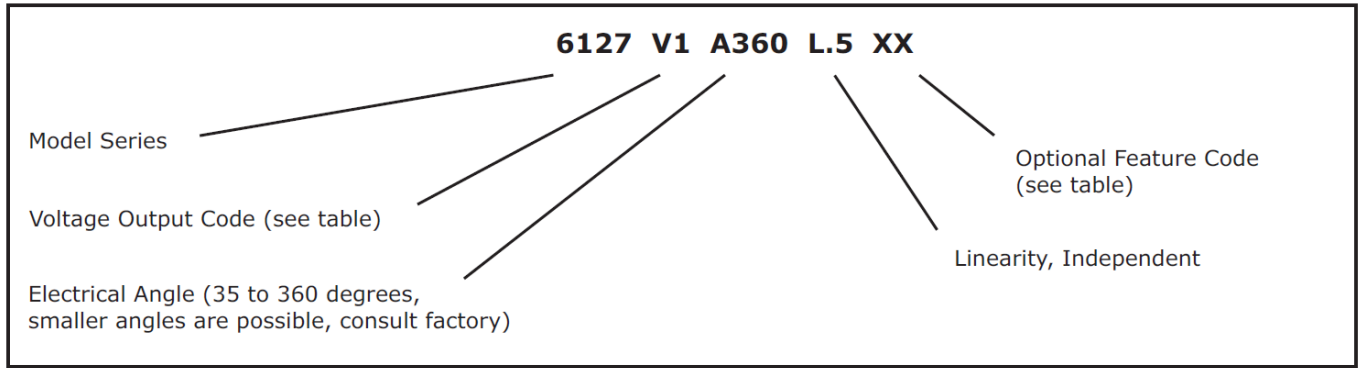

General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# Non-Contacting Hall Effect Single Turn Position Sensor



## 6120 Series

### Electrical Specifications<sup>1</sup>

|                                           |                                                                              |
|-------------------------------------------|------------------------------------------------------------------------------|
| Output voltage                            | 0.25 Vdc to 4.75 Vdc typical (see Feature Codes table)                       |
| Output overvoltage limits                 | 10 Vdc to -0.3 Vdc; output may be shorted to ground or supply without damage |
| Output current                            | ±8 mA max.                                                                   |
| Output load                               | 1 kΩ min., 10 kΩ typical                                                     |
| Input voltage                             | 4.5 to 5.5 Vdc                                                               |
| Supply voltage absolute limits            | 20 Vdc max., -10 Vdc min.                                                    |
| Independent linearity <sup>2</sup>        | ±0.5% (0.25% available)                                                      |
| Hysteresis                                | 0.2% max.                                                                    |
| Resolution                                | 0.088° for 360° travel, 0.011° for 45° travel                                |
| Supply current                            | 7.5 mA typical, 11 mA max.                                                   |
| Dielectric strength                       | 750 V rms                                                                    |
| Insulation resistance                     | 1,000 megΩ min.                                                              |
| Electrostatic discharge (ESD)             | Passes 2 kV human body model and 15 kV air discharge                         |
| Bulk current injection (BCI)              | Passes 2-500 MHz at 200 mA                                                   |
| Actual electrical travel                  | 360° typical (see ordering information)                                      |
| Temperature coefficient of output voltage | ±20 ppm/°C                                                                   |

### Mechanical Specifications

|                                |                                               |
|--------------------------------|-----------------------------------------------|
| Total mechanical travel        | 360° continuous (320° with stop feature)      |
| Bearing                        | Bearing bronze bushing                        |
| Weight                         | 0.6 oz. typical                               |
| Static stop strength           | 40 in. oz.                                    |
| Panel nut tightening torque    | 25 in. lb. max.                               |
| Supply voltage absolute limits | 20 Vdc max., -10 Vdc min.                     |
| Independent linearity          | ±0.5% (0.25% available)                       |
| Hysteresis                     | 0.2% max.                                     |
| Resolution                     | 0.088° for 360° travel, 0.011° for 45° travel |

<sup>1</sup> Specifications subject to change without notice.

<sup>2</sup> Linearity is measured between 1% and 99% of input voltage.

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# Non-Contacting Hall Effect Single Turn Position Sensor



## 6120 Series

### Environmental Specifications

|                              |                                         |
|------------------------------|-----------------------------------------|
| Operating temperature range  | -40°C to +125°C                         |
| Shock                        | Per MIL R-39023, 6 ms saw-tooth 100 G's |
| Vibration                    | Per MIL R-39023, 10 G's, 100 to 500 Hz  |
| Moisture resistance, powered | Per MIL 202G, method 106G               |
| Rotational life              | 10 million shaft revolutions            |
| Storage temperature range    | -55°C to +125°C                         |

### Feature Codes

| Voltage Output Codes |                                   | Optional Feature Codes |                               |
|----------------------|-----------------------------------|------------------------|-------------------------------|
| V0                   | $\leq 0.15$ Vdc to $\geq 4.8$ Vdc | ST                     | Stop (320°)                   |
| V1                   | 0.2 Vdc to 4.8 Vdc                | FS                     | Flatted Shaft (slot standard) |
| V2                   | 0.25 Vdc to 4.75 Vdc              | LT                     | Linearity Data                |
| V3                   | 0.5 Vdc to 4.5 Vdc                | SL                     | Shaft Lock                    |
| V4                   | 0.75 Vdc to 4.25 Vdc              | CW                     | Reverse Direction             |
| V5                   | 1 Vdc to 4 Vdc                    |                        |                               |

When V0 is used the angle specified is the theoretical angle over which the output would vary if the output could actually reach 0% and 100% of Vcc.

#### General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# Non-Contacting Hall Effect Single Turn Position Sensor



## 6120 Series

### Outline Drawings

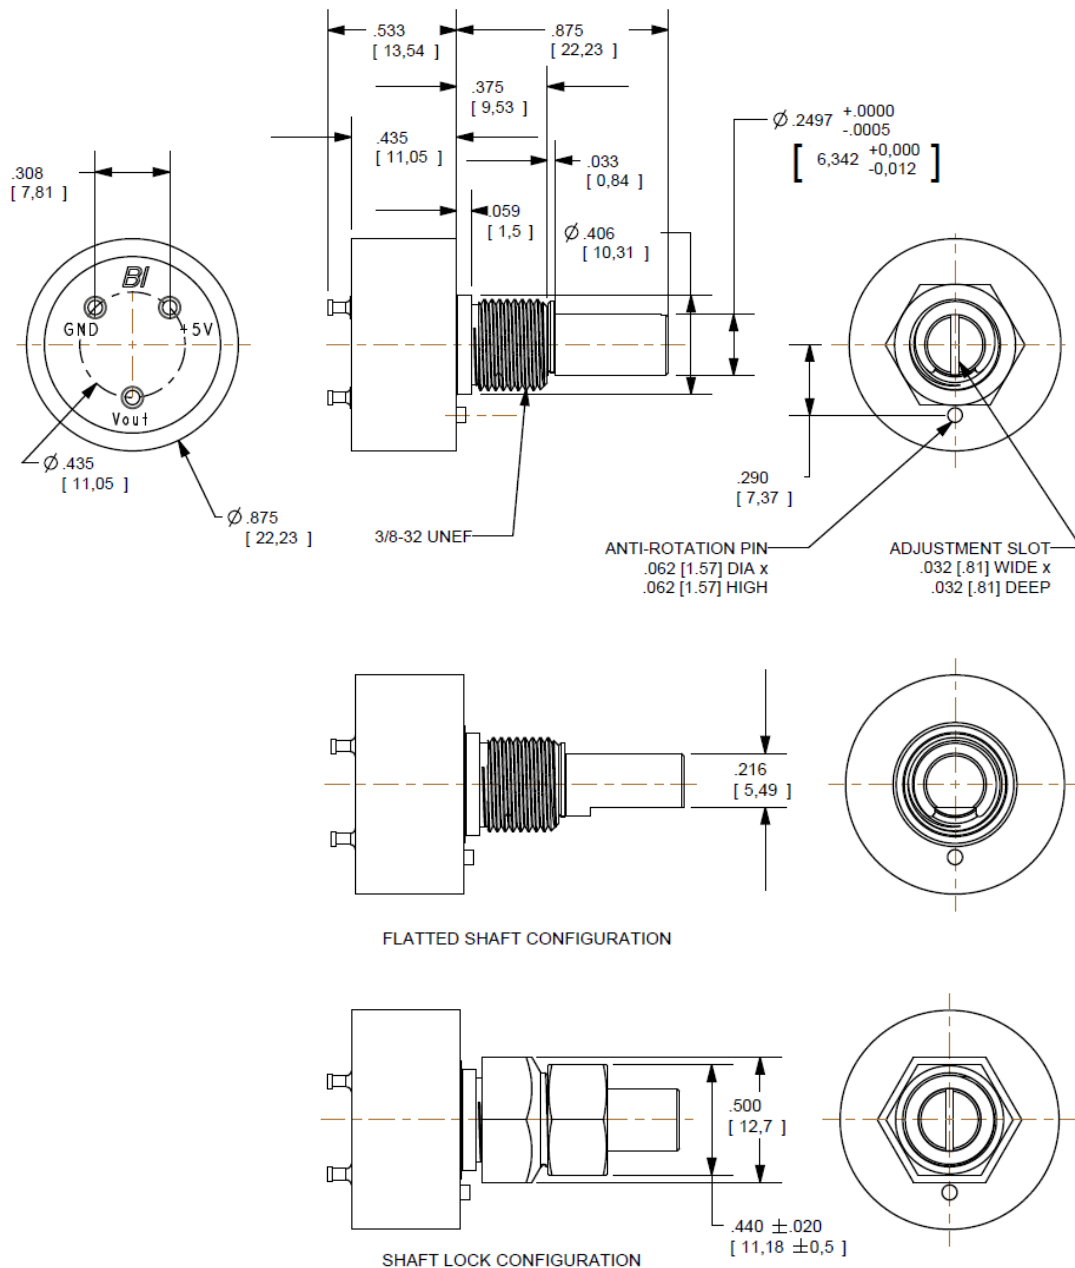

#### NOTES:

1. UNIT SHIPS WITH NUT AND WASHER (NOT SHOWN).
2. FOR SLOTTED OR FLATTED SHAFT, OUTPUT IS AT 50% IN POSITION SHOWN.
3. DIMENSIONS: INCHES [mm].
4. TOLERANCES:  $\pm$ .015 [.38] UNLESS NOTED.

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331