

# IRF7601PbF


## HEXFET® Power MOSFET

- Generation V Technology
- Ultra Low On-Resistance
- N-Channel MOSFET
- Very Small SOIC Package
- Low Profile (<1.1mm)
- Available in Tape & Reel
- Fast Switching
- Lead-Free


### Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The new Micro8 package, with half the footprint area of the standard SO-8, provides the smallest footprint available in an SOIC outline. This makes the Micro8 an ideal device for applications where printed circuit board space is at a premium. The low profile (<1.1mm) of the Micro8 will allow it to fit easily into extremely thin application environments such as portable electronics and PCMCIA cards.



|                            |
|----------------------------|
| $V_{DS} = 20V$             |
| $R_{DS(on)} = 0.035\Omega$ |



### Absolute Maximum Ratings

|                          | Parameter                                 | Max.         | Units |
|--------------------------|-------------------------------------------|--------------|-------|
| $I_D @ T_A = 25^\circ C$ | Continuous Drain Current, $V_{GS} @ 4.5V$ | 5.7          | A     |
| $I_D @ T_A = 70^\circ C$ | Continuous Drain Current, $V_{GS} @ 4.5V$ | 4.6          |       |
| $I_{DM}$                 | Pulsed Drain Current ①                    | 30           |       |
| $P_D @ T_A = 25^\circ C$ | Power Dissipation                         | 1.8          | W     |
|                          | Linear Derating Factor                    | 14           | mW/°C |
| $V_{GS}$                 | Gate-to-Source Voltage                    | $\pm 12$     | V     |
| $dv/dt$                  | Peak Diode Recovery $dv/dt$ ②             | 5.0          | V/ns  |
| $T_J, T_{STG}$           | Junction and Storage Temperature Range    | -55 to + 150 | °C    |

### Thermal Resistance

|                 | Parameter                    | Typ. | Max. | Units |
|-----------------|------------------------------|------|------|-------|
| $R_{\theta JA}$ | Maximum Junction-to-Ambient④ | —    | 70   | °C/W  |

All Micro8 Data Sheets reflect improved Thermal Resistance, Power and Current -Handling Ratings- effective only for product marked with Date Code 505 or later .

## Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)

|                                        | Parameter                            | Min. | Typ.  | Max.  | Units | Conditions                                                          |
|----------------------------------------|--------------------------------------|------|-------|-------|-------|---------------------------------------------------------------------|
| V <sub>(BR)DSS</sub>                   | Drain-to-Source Breakdown Voltage    | 20   | —     | —     | V     | V <sub>GS</sub> = 0V, I <sub>D</sub> = 250μA                        |
| ΔV <sub>(BR)DSS</sub> /ΔT <sub>J</sub> | Breakdown Voltage Temp. Coefficient  | —    | 0.024 | —     | V/°C  | Reference to 25°C, I <sub>D</sub> = 1mA                             |
| R <sub>DS(on)</sub>                    | Static Drain-to-Source On-Resistance | —    | —     | 0.035 | Ω     | V <sub>GS</sub> = 4.5V, I <sub>D</sub> = 3.8A ③                     |
|                                        |                                      | —    | —     | 0.050 |       | V <sub>GS</sub> = 2.7V, I <sub>D</sub> = 1.9A ③                     |
| V <sub>GS(th)</sub>                    | Gate Threshold Voltage               | 0.70 | —     | —     | V     | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA          |
| g <sub>fs</sub>                        | Forward Transconductance             | 6.1  | —     | —     | S     | V <sub>DS</sub> = 10V, I <sub>D</sub> = 1.9A                        |
| I <sub>DSS</sub>                       | Drain-to-Source Leakage Current      | —    | —     | 1.0   | μA    | V <sub>DS</sub> = 16V, V <sub>GS</sub> = 0V                         |
|                                        |                                      | —    | —     | 25    |       | V <sub>DS</sub> = 16V, V <sub>GS</sub> = 0V, T <sub>J</sub> = 125°C |
| I <sub>GSS</sub>                       | Gate-to-Source Forward Leakage       | —    | —     | -100  | nA    | V <sub>GS</sub> = -12V                                              |
|                                        | Gate-to-Source Reverse Leakage       | —    | —     | 100   |       | V <sub>GS</sub> = 12V                                               |
| Q <sub>g</sub>                         | Total Gate Charge                    | —    | 14    | 22    | nC    | I <sub>D</sub> = 3.8A                                               |
| Q <sub>gs</sub>                        | Gate-to-Source Charge                | —    | 2.0   | 3.0   |       | V <sub>DS</sub> = 16V                                               |
| Q <sub>gd</sub>                        | Gate-to-Drain ("Miller") Charge      | —    | 6.3   | 9.5   |       | V <sub>GS</sub> = 4.5V, See Fig. 6 and 9 ③                          |
| t <sub>d(on)</sub>                     | Turn-On Delay Time                   | —    | 5.1   | —     | ns    | V <sub>DD</sub> = 10V                                               |
| t <sub>r</sub>                         | Rise Time                            | —    | 47    | —     |       | I <sub>D</sub> = 3.8A                                               |
| t <sub>d(off)</sub>                    | Turn-Off Delay Time                  | —    | 24    | —     |       | R <sub>G</sub> = 6.2Ω                                               |
| t <sub>f</sub>                         | Fall Time                            | —    | 32    | —     |       | R <sub>D</sub> = 2.6Ω, See Fig. 10 ③                                |
| C <sub>iss</sub>                       | Input Capacitance                    | —    | 650   | —     | pF    | V <sub>GS</sub> = 0V                                                |
| C <sub>oss</sub>                       | Output Capacitance                   | —    | 300   | —     |       | V <sub>DS</sub> = 15V                                               |
| C <sub>rss</sub>                       | Reverse Transfer Capacitance         | —    | 150   | —     |       | f = 1.0MHz, See Fig. 5                                              |

## Source-Drain Ratings and Characteristics

|                 | Parameter                            | Min. | Typ. | Max. | Units | Conditions                                                           |
|-----------------|--------------------------------------|------|------|------|-------|----------------------------------------------------------------------|
| I <sub>S</sub>  | Continuous Source Current            | —    | —    | 1.8  | A     | MOSFET symbol showing the integral reverse p-n junction diode.       |
| I <sub>SM</sub> | Pulsed Source Current (Body Diode) ① | —    | —    | 30   |       |                                                                      |
| V <sub>SD</sub> | Diode Forward Voltage                | —    | —    | 1.2  | V     | T <sub>J</sub> = 25°C, I <sub>S</sub> = 3.8A, V <sub>GS</sub> = 0V ③ |
| t <sub>rr</sub> | Reverse Recovery Time                | —    | 51   | 77   | ns    | T <sub>J</sub> = 25°C, I <sub>F</sub> = 3.8A                         |
| Q <sub>rr</sub> | Reverse Recovery Charge              | —    | 69   | 100  | nC    | di/dt = 100A/μs ③                                                    |


### Notes:

① Repetitive rating; pulse width limited by max. junction temperature. ( See fig. 11 )


③ Pulse width ≤ 300μs; duty cycle ≤ 2%.

② I<sub>SD</sub> ≤ 3.8A, di/dt ≤ 96A/μs, V<sub>DD</sub> ≤ V<sub>(BR)DSS</sub>, T<sub>J</sub> ≤ 150°C


④ Surface mounted on FR-4 board, t ≤ 10sec.

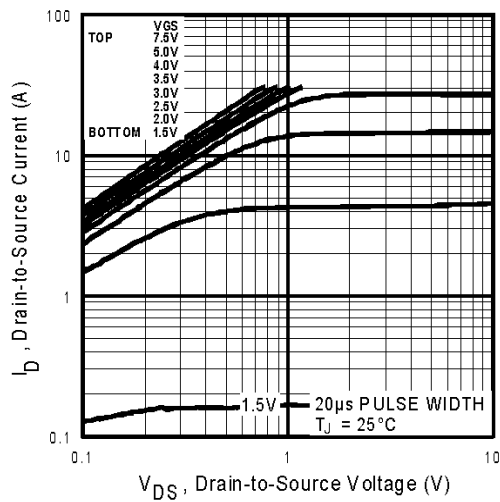


**Fig 1.** Typical Output Characteristics

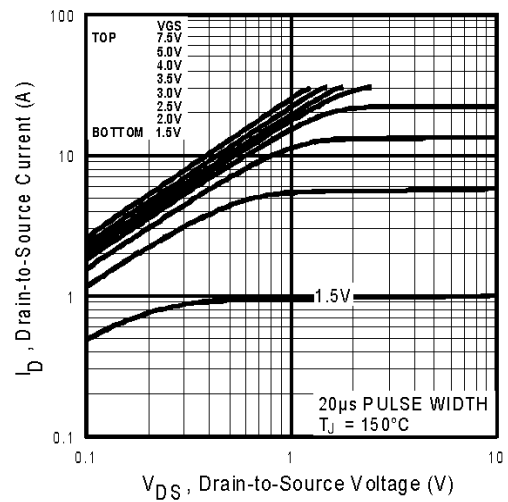


**Fig 2.** Typical Output Characteristics

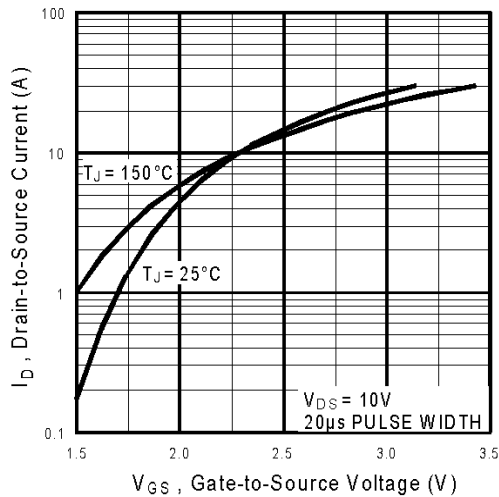


**Fig 3.** Typical Transfer Characteristics

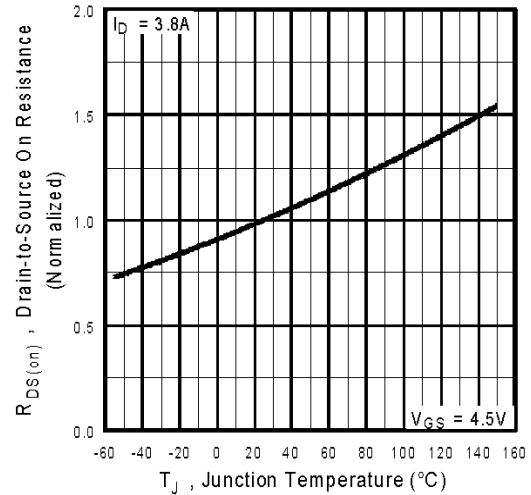


**Fig 4.** Normalized On-Resistance  
Vs. Temperature

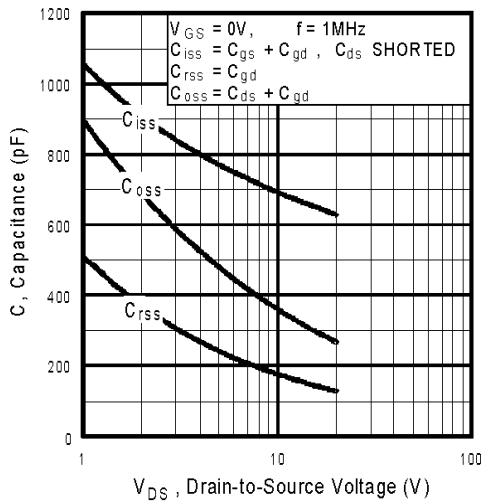


**Fig 5.** Typical Capacitance Vs. Drain-to-Source Voltage

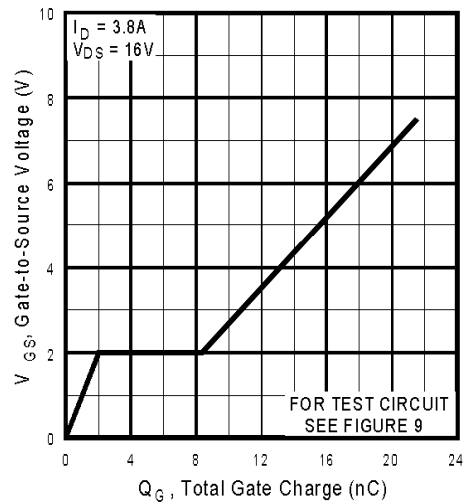


**Fig 6.** Typical Gate Charge Vs. Gate-to-Source Voltage

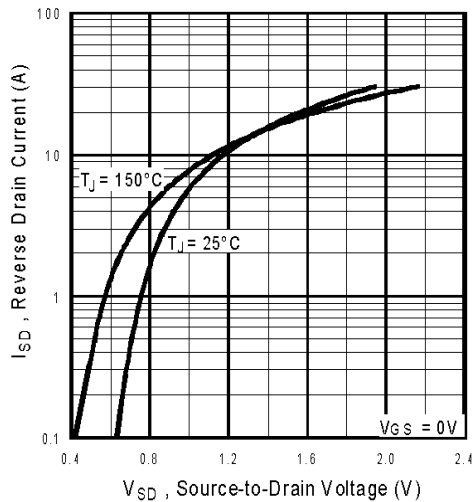


**Fig 7.** Typical Source-Drain Diode Forward Voltage

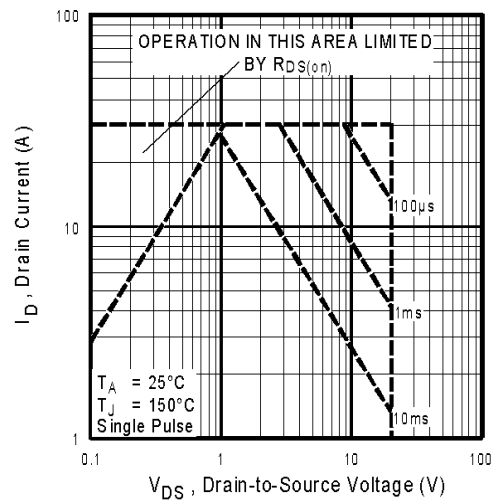


**Fig 8.** Maximum Safe Operating Area

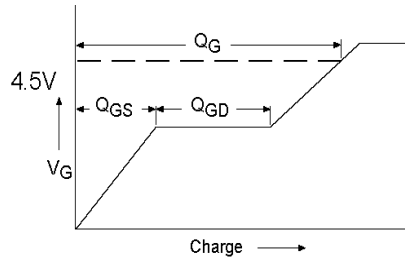


**Fig 9a.** Basic Gate Charge Waveform

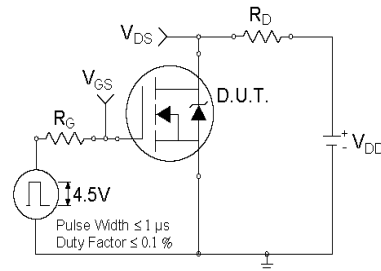


**Fig 10a.** Switching Time Test Circuit



**Fig 9b.** Gate Charge Test Circuit


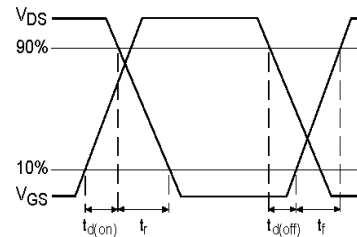


**Fig 10b.** Switching Time Waveforms

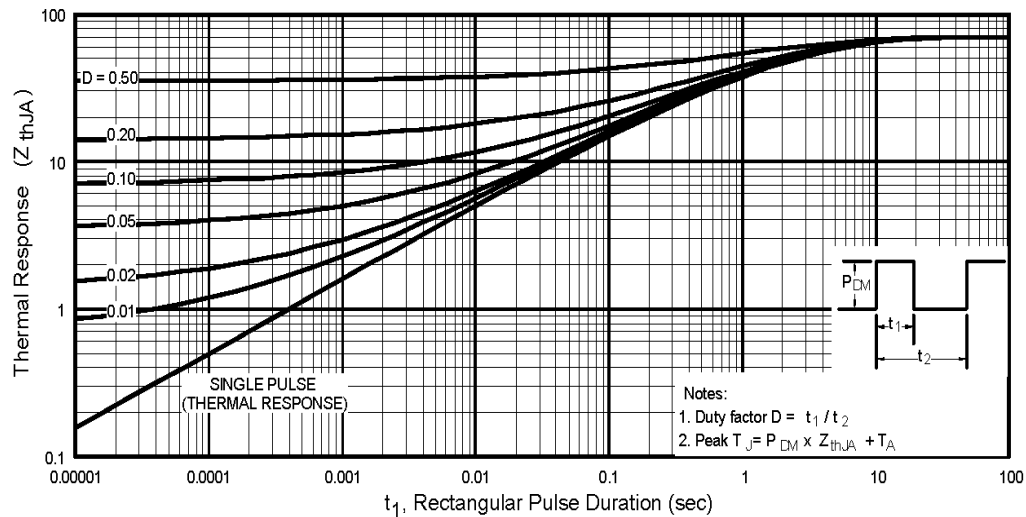

**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient


## Peak Diode Recovery dv/dt Test Circuit

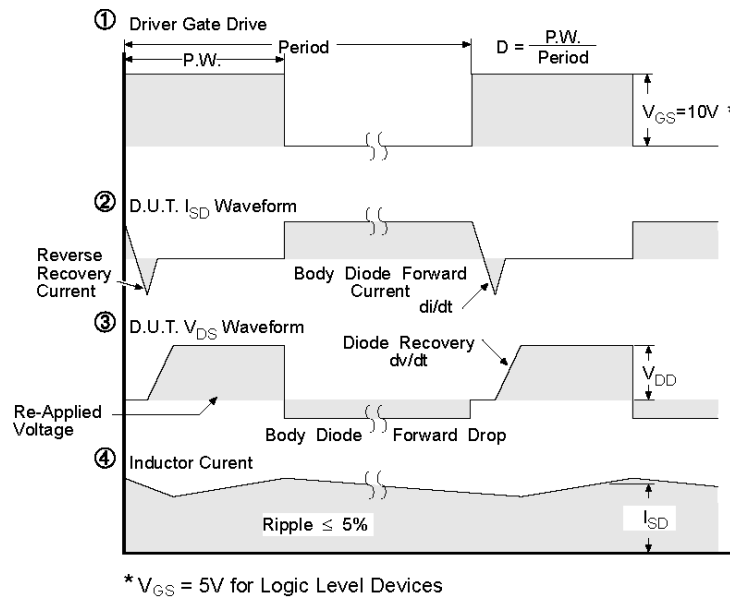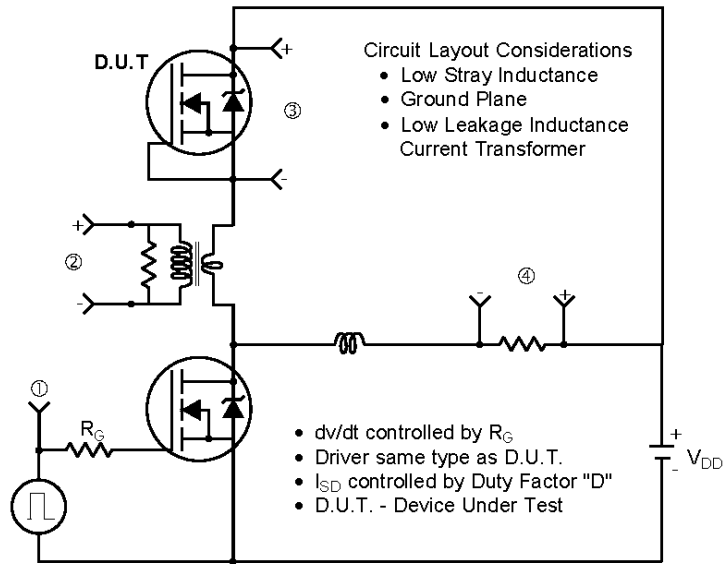

**Fig 12.** For N-Channel HEXFETS


## Micro8 Package Outline

Dimensions are shown in millimeters (inches)

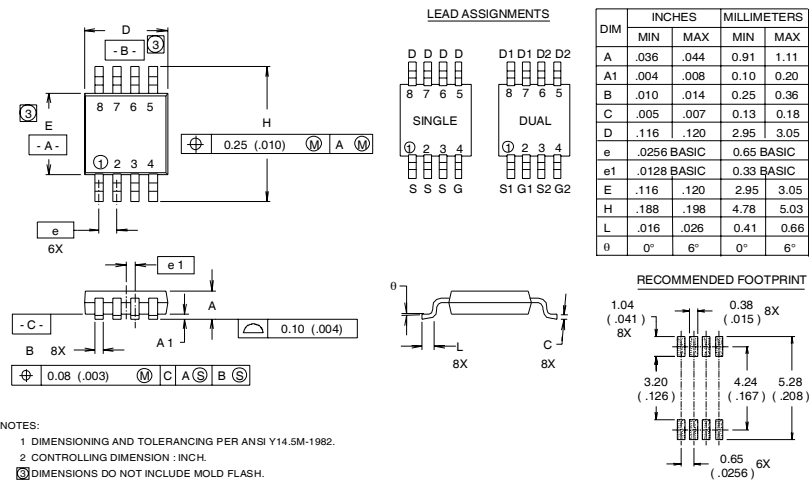

## Micro8 Part Marking Information

EXAMPLE: THIS IS AN IRF7501

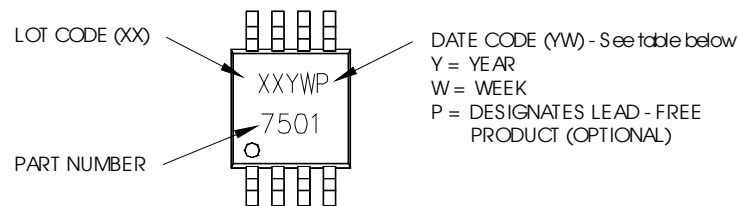

WW = (1-26) IF PRECEDED BY LAST DIGIT OF CALENDAR YEAR

| YEAR | Y | WORK WEEK | W |
|------|---|-----------|---|
| 2001 | 1 | 01        | A |
| 2002 | 2 | 02        | B |
| 2003 | 3 | 03        | C |
| 2004 | 4 | 04        | D |
| 2005 | 5 |           |   |
| 2006 | 6 |           |   |
| 2007 | 7 |           |   |
| 2008 | 8 |           |   |
| 2009 | 9 |           |   |
| 2010 | 0 | 24        | X |
|      |   | 25        | Y |
|      |   | 26        | Z |

WW = (27-52) IF PRECEDED BY A LETTER


| YEAR | Y | WORK WEEK | W |
|------|---|-----------|---|
| 2001 | A | 27        | A |
| 2002 | B | 28        | B |
| 2003 | C | 29        | C |
| 2004 | D | 30        | D |
| 2005 | E |           |   |
| 2006 | F |           |   |
| 2007 | G |           |   |
| 2008 | H |           |   |
| 2009 | J |           |   |
| 2010 | K | 50        | X |
|      |   | 51        | Y |
|      |   | 52        | Z |

# IRF7601PbF

International  
**IR** Rectifier


## Micro8 Tape & Reel Information

Dimensions are shown in millimeters (inches)

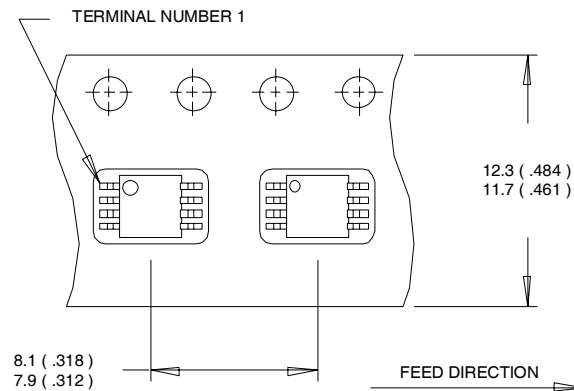

### NOTES:

1. OUTLINE CONFORMS TO EIA-481 & EIA-541.
2. CONTROLLING DIMENSION : MILLIMETER.

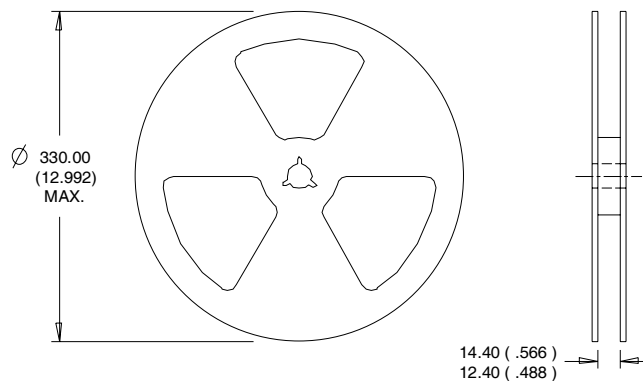

### NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.05/04  
[www.irf.com](http://www.irf.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331