

[illegible]

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK	PRELIMINARY RELEASE	8/13/07	IP

Top View Dimensions:
Overall Width: 3.025
Central Opening Width: 0.766 MAX
Side Flange Thickness: 0.616 MAX
Note: SCREW HEADS TO BE ON FIXED END OF CABLE CLAMP

Side View Dimensions:
Total Height: 1.770 MAX
Internal Feature Height: 1.000 / 0.990
Bottom Flange Thickness: 0.355 MAX

End View Dimension:
Cable Opening: .473MAX

SECTION A-A

Amphenol Shenzhen ROHS Compliant EU2002/95/EC


CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

SPECIFICATIONS:

- 1) SOLDER CUP CONTACT: TO ACCOMMODATE 22-30 AWG SOLID AND 24-30 STRANDED CONNECTOR WIRES.
- 2) DIELECTRIC: Diallyl-phthalate per MIL-M-14F Type MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 30 MICRO-INCHES MIN. GOLD MATING AREA: 3-5 MICRO-INCHES GOLD TERMINAL AREA: 50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: ZINC PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

CUSTOMER INFORMATION DRAWING

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D
PARTS LIST			
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC		APPROVAL DATE	Amphenol
		DRAWN XS.GUO 8/13/07	
		CHECKED	
		CHECKED	
DRAWING FILE : \DRAWING\57\C57305003(448).DWG		TITLE 50 CONTACT SIZE MICRORIBBON CABLE MOUNT PLUG ASSEMBLY, HIGH BARRIER	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION	SIZE A3
REMOVE SHARP EDGES			DRAWING NO. C57-30500-3(448)
DIMENSIONS			REV. A
U.S. INCHES	(METRIC) (MM)		SCALE NONE
			SHEET 1 OF 1

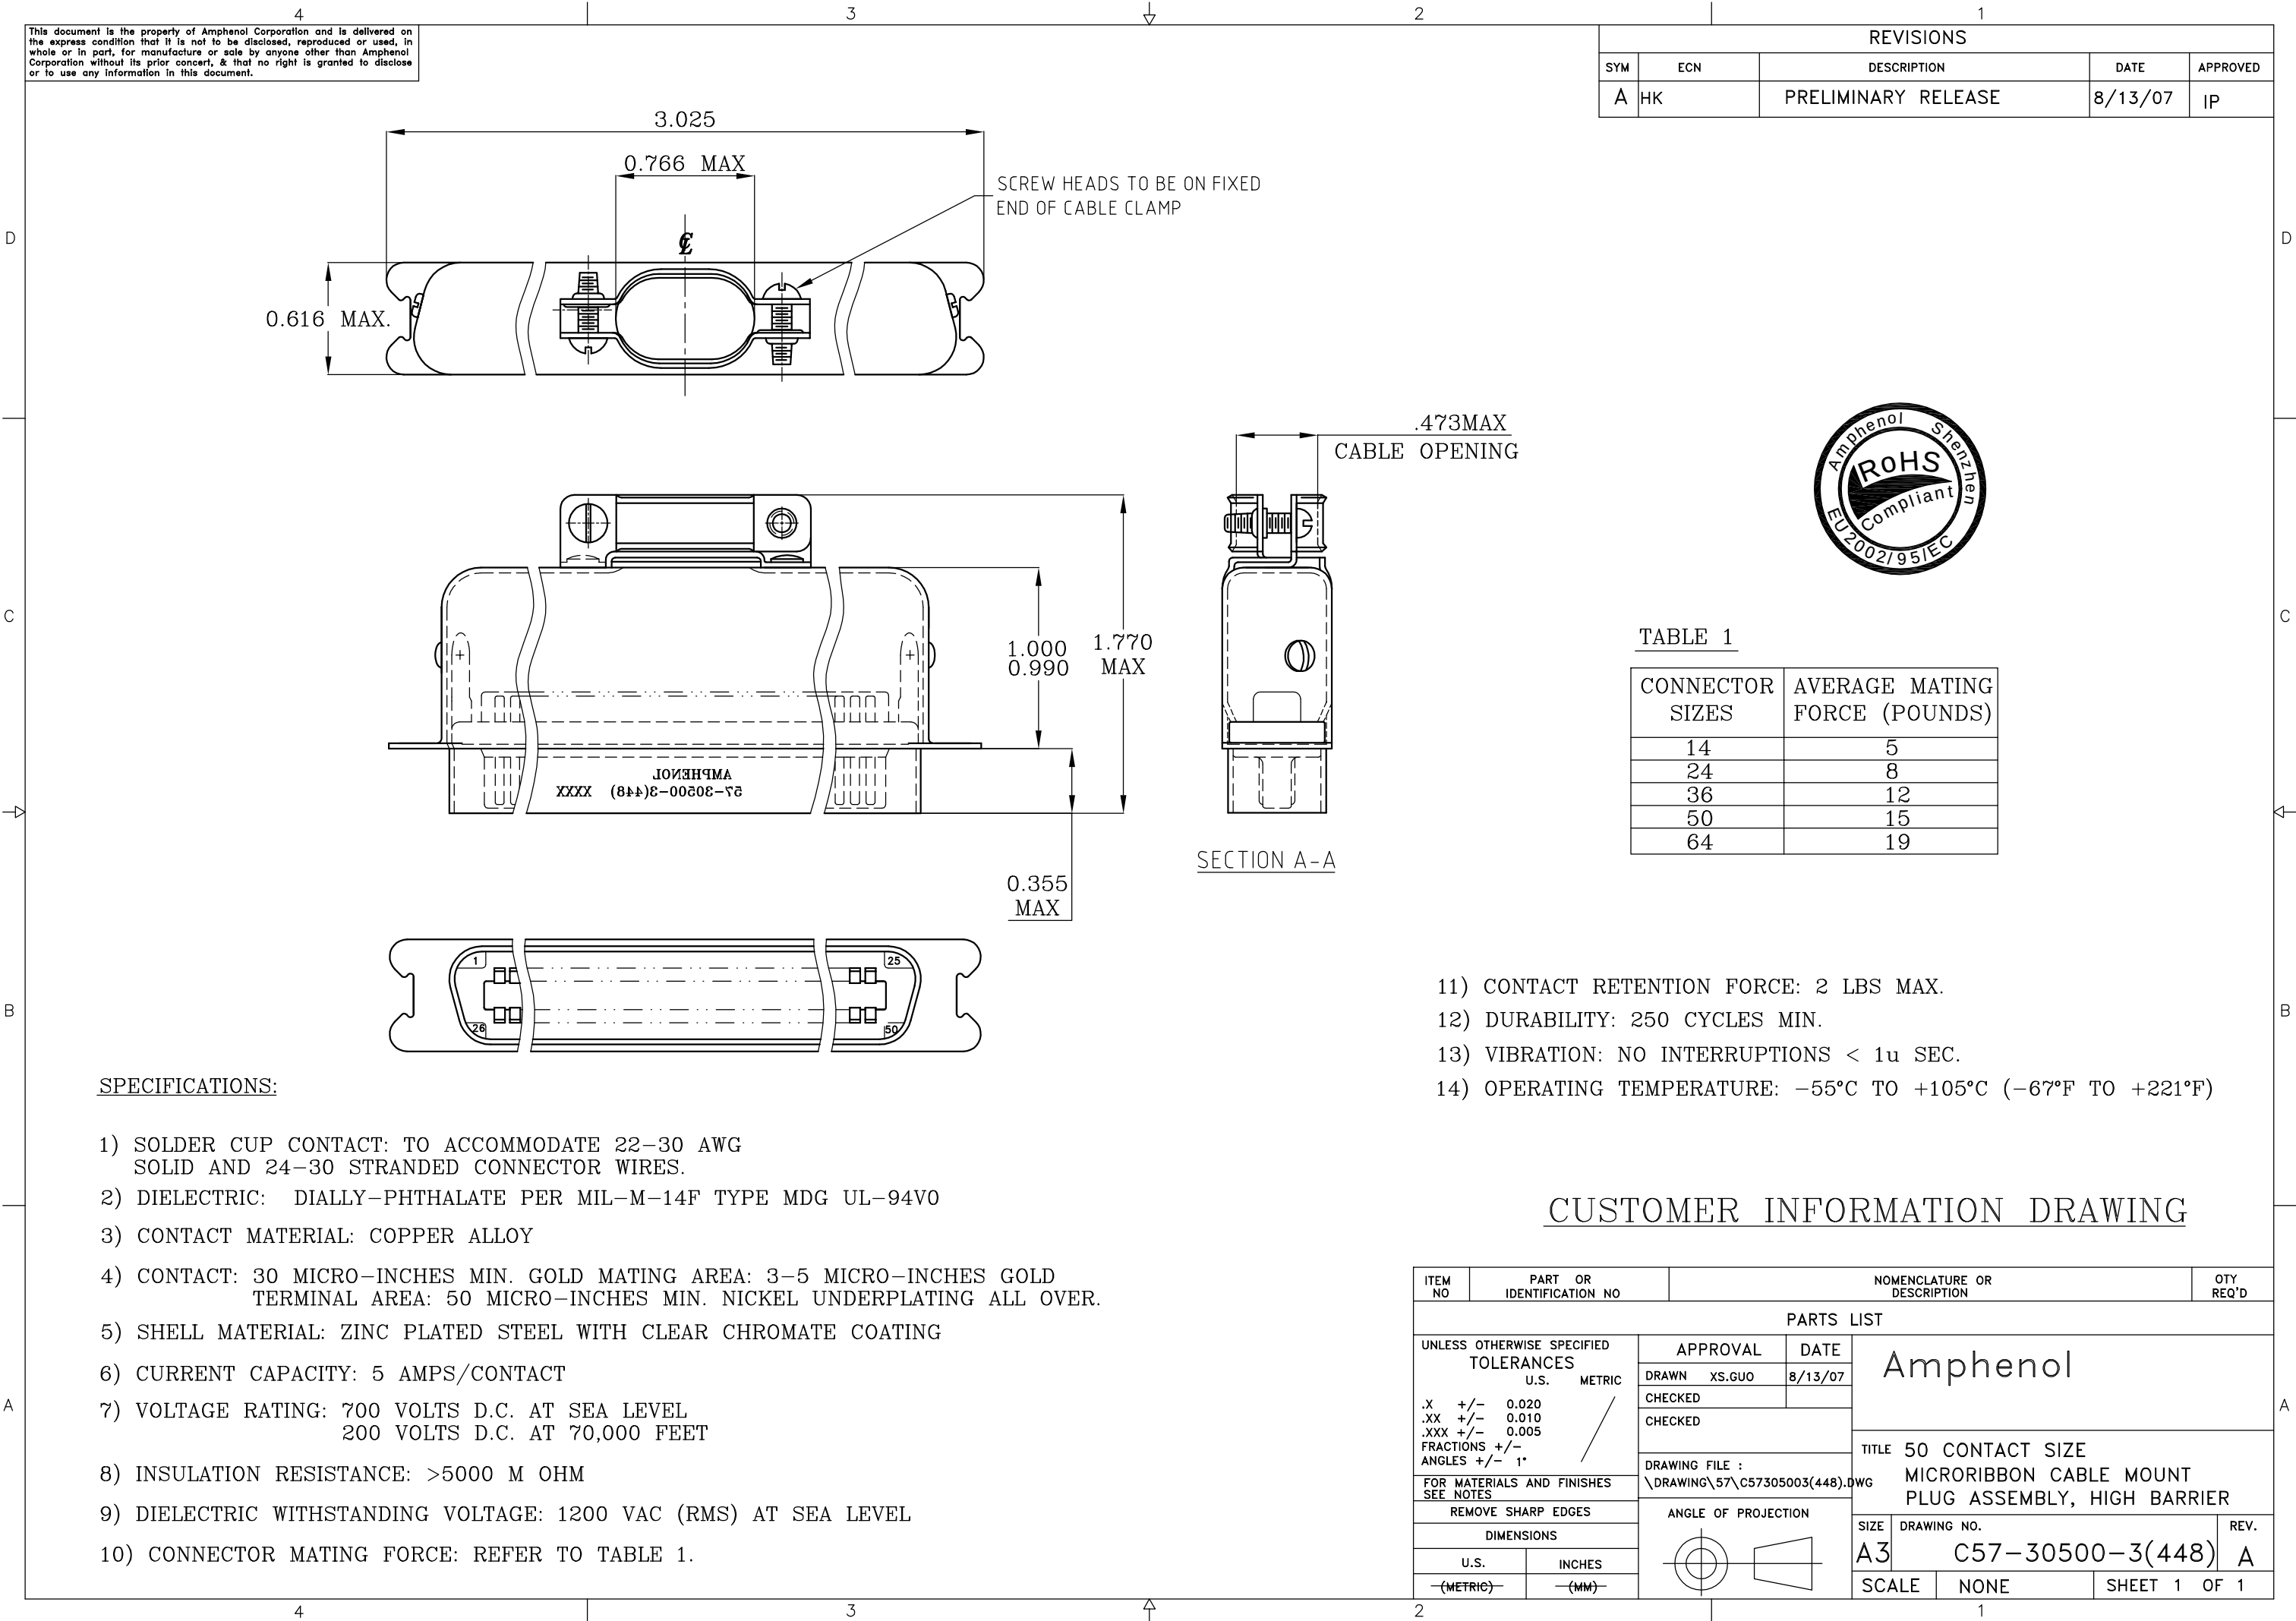

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK	PRELIMINARY RELEASE	8/13/07	IP

Top View Dimensions:
Overall Width: 3.025
Central Opening Width: 0.766 MAX
Side Flange Thickness: 0.616 MAX
Note: SCREW HEADS TO BE ON FIXED END OF CABLE CLAMP

Side View Dimensions:
Total Height: 1.770 MAX
Internal Feature Height: 1.000 / 0.990
Bottom Flange Thickness: 0.355 MAX

End View Dimension:
Cable Opening: .473MAX

SECTION A-A

Amphenol Shenzhen ROHS Compliant EU2002/95/EC

CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

SPECIFICATIONS:

- 1) SOLDER CUP CONTACT: TO ACCOMMODATE 22-30 AWG SOLID AND 24-30 STRANDED CONNECTOR WIRES.
- 2) DIELECTRIC: Diallyl-phthalate per MIL-M-14F Type MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 30 MICRO-INCHES MIN. GOLD MATING AREA: 3-5 MICRO-INCHES GOLD TERMINAL AREA: 50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: ZINC PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

CUSTOMER INFORMATION DRAWING

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D
PARTS LIST			
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC		APPROVAL DATE	Amphenol
		DRAWN XS.GUO 8/13/07	
		CHECKED	
		CHECKED	
DRAWING FILE : \DRAWING\57\C57305003(448).DWG		TITLE 50 CONTACT SIZE MICRORIBBON CABLE MOUNT PLUG ASSEMBLY, HIGH BARRIER	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION	SIZE DRAWING NO. REV.
REMOVE SHARP EDGES			A3 C57-30500-3(448) A
DIMENSIONS			SCALE NONE SHEET 1 OF 1
U.S. INCHES	(METRIC) (MM)		

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK	PRELIMINARY RELEASE	8/13/07	IP

Top View Dimensions:
Overall Width: 3.025
Central Opening Width: 0.766 MAX
Side Flange Thickness: 0.616 MAX
Note: SCREW HEADS TO BE ON FIXED END OF CABLE CLAMP

Side View Dimensions:
Total Height: 1.770 MAX
Internal Feature Height: 1.000 / 0.990
Bottom Flange Thickness: 0.355 MAX

End View Dimension:
Cable Opening: .473MAX

SECTION A-A

Amphenol Shenzhen ROHS Compliant EU2002/95/EC

CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

SPECIFICATIONS:

- 1) SOLDER CUP CONTACT: TO ACCOMMODATE 22-30 AWG SOLID AND 24-30 STRANDED CONNECTOR WIRES.
- 2) DIELECTRIC: Diallyl-phthalate per MIL-M-14F Type MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 30 MICRO-INCHES MIN. GOLD MATING AREA: 3-5 MICRO-INCHES GOLD TERMINAL AREA: 50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: ZINC PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

CUSTOMER INFORMATION DRAWING

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D
PARTS LIST			
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC		APPROVAL DATE	Amphenol
		DRAWN XS.GUO 8/13/07	
		CHECKED	
		CHECKED	
DRAWING FILE : \DRAWING\57\C57305003(448).DWG		TITLE 50 CONTACT SIZE MICRORIBBON CABLE MOUNT PLUG ASSEMBLY, HIGH BARRIER	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION	SIZE A3
REMOVE SHARP EDGES			DRAWING NO. C57-30500-3(448)
DIMENSIONS			REV. A
U.S. INCHES	(METRIC) (MM)		SCALE NONE
			SHEET 1 OF 1

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK	PRELIMINARY RELEASE	8/13/07	IP

Top View Dimensions:
Overall Width: 3.025
Central Opening Width: 0.766 MAX
Side Flange Thickness: 0.616 MAX
Note: SCREW HEADS TO BE ON FIXED END OF CABLE CLAMP

Side View Dimensions:
Total Height: 1.770 MAX
Internal Feature Height: 1.000 / 0.990
Bottom Flange Thickness: 0.355 MAX

End View Dimension:
Cable Opening: .473MAX

SECTION A-A

Amphenol Shenzhen ROHS Compliant EU2002/95/EC

CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

SPECIFICATIONS:

- 1) SOLDER CUP CONTACT: TO ACCOMMODATE 22-30 AWG SOLID AND 24-30 STRANDED CONNECTOR WIRES.
- 2) DIELECTRIC: Diallyl-phthalate per MIL-M-14F Type MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 30 MICRO-INCHES MIN. GOLD MATING AREA: 3-5 MICRO-INCHES GOLD TERMINAL AREA: 50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: ZINC PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

CUSTOMER INFORMATION DRAWING

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D
PARTS LIST			
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC		APPROVAL DATE	Amphenol
		DRAWN XS.GUO 8/13/07	
		CHECKED	
		CHECKED	
DRAWING FILE : \DRAWING\57\C57305003(448).DWG		TITLE 50 CONTACT SIZE MICRORIBBON CABLE MOUNT PLUG ASSEMBLY, HIGH BARRIER	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION	SIZE A3
REMOVE SHARP EDGES			DRAWING NO. C57-30500-3(448)
DIMENSIONS			REV. A
U.S. INCHES	(MM)		SCALE NONE
(METRIC)			SHEET 1 OF 1

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK	PRELIMINARY RELEASE	8/13/07	IP

Top View Dimensions:
Overall Width: 3.025
Central Opening Width: 0.766 MAX
Side Flange Thickness: 0.616 MAX
Note: SCREW HEADS TO BE ON FIXED END OF CABLE CLAMP

Side View Dimensions:
Total Height: 1.770 MAX
Internal Feature Height: 1.000 / 0.990
Bottom Flange Thickness: 0.355 MAX

End View Dimension:
Cable Opening: .473MAX

SECTION A-A

Amphenol Shenzhen ROHS Compliant EU2002/95/EC

CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

SPECIFICATIONS:

- 1) SOLDER CUP CONTACT: TO ACCOMMODATE 22-30 AWG SOLID AND 24-30 STRANDED CONNECTOR WIRES.
- 2) DIELECTRIC: Diallyl-phthalate per MIL-M-14F Type MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 30 MICRO-INCHES MIN. GOLD MATING AREA: 3-5 MICRO-INCHES GOLD TERMINAL AREA: 50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: ZINC PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

CUSTOMER INFORMATION DRAWING

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D
PARTS LIST			
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC		APPROVAL DATE	Amphenol
		DRAWN XS.GUO 8/13/07	
		CHECKED	
		CHECKED	
DRAWING FILE : \DRAWING\57\C57305003(448).DWG		TITLE 50 CONTACT SIZE MICRORIBBON CABLE MOUNT PLUG ASSEMBLY, HIGH BARRIER	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION	SIZE A3
REMOVE SHARP EDGES			DRAWING NO. C57-30500-3(448)
DIMENSIONS			REV. A
U.S. INCHES	(METRIC) (MM)		SCALE NONE
			SHEET 1 OF 1

[illegible]



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331