

## Description

The 74AHCT164 is a serial input 8-bit edge-triggered shift register that has outputs from each of eight stages. The device features TTL compatible inputs.

### SERIAL DATA INPUT PINS

The serial input data is entered at pin SDA or pin SDB as these are logically ANDED. Either input could be used as an active HIGH enable with data entry on the other pin. If a single input is desired, the pins can be tied together or the unused input can be tied HIGH.

### DATA ENTRY

Data is shifted into Q0 from the serial input pins on each LOW to HIGH transition of the CP pin. Also during the CP edge the data is transferred from each Qn to Qn+1. The serial data on pins DSA and DSB must be stable before and after the CP rising edge to meet the set-up and hold timing requirements.

### RESET

When asserted LOW the Master Reset ( $\overline{\text{MR}}$ ) pin sets all Qn to LOW. This action does not depend on the condition of serial input or clock pins. The MR must be asserted HIGH for a recovery time before the next CP positive edge pulse.


## Features

- Supply Voltage Range from 4.5V to 5.5V
- Sinks or Sources 8mA at  $V_{CC} = 4.5V$
- TTL Compatible Inputs
- CMOS Low Power Consumption
- Schmitt Trigger Action at All Inputs
- ESD Protection Exceeds JESD 22
  - 200-V Machine Model (A115)
  - 2000-V Human Body Model (A114)
  - 1000-V Charged Device Model (C101)
- Range of Package Options SO-14 and TSSOP-14
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
  2. See [http://www.diodes.com/quality/lead\\_free.html](http://www.diodes.com/quality/lead_free.html) for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

## Pin Assignments

### (Top View)

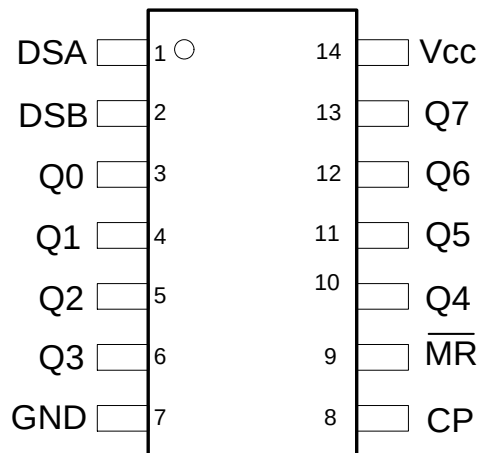

### SO-14 / TSSOP-14 / PDIP-14\*

\*PDIP-14 is a Future Product

## Applications

- General Purpose Logic
- Wide Array of Products Such as:
  - PCs, Networking, Notebooks, Netbooks
  - Computer Peripherals, Hard Drives, CD/DVD ROM
  - TV, DVD, DVR, Set-Top Box

Device ordering information is on page 7

## Pin Descriptions


| Pin Number | Pin Name               | Function                             |
|------------|------------------------|--------------------------------------|
| 1          | DSA                    | Serial Data Input                    |
| 2          | DSB                    | Serial Data Input                    |
| 3          | Q0                     | Data Output                          |
| 4          | Q1                     | Data Output                          |
| 5          | Q2                     | Data Output                          |
| 6          | Q3                     | Data Output                          |
| 7          | GND                    | Ground                               |
| 8          | CP                     | Clock Pulse –Positive Edge Triggered |
| 9          | $\overline{\text{MR}}$ | Master Reset - Asynchronous          |
| 10         | Q4                     | Data Output                          |
| 11         | Q5                     | Data Output                          |
| 12         | Q6                     | Data Output                          |
| 13         | Q7                     | Data Output                          |
| 14         | V <sub>CC</sub>        | Supply Voltage                       |

## Function Table


| Mode  | Input                  |    |     |     | Output |                                             |
|-------|------------------------|----|-----|-----|--------|---------------------------------------------|
|       | $\overline{\text{MR}}$ | CP | DSA | DSB | Q0     | Q1-Q7                                       |
| Reset | L                      | X  | X   | X   | L      | L                                           |
| Shift | H                      | ↑  | L   | X   | L      | Q <sub>n</sub> ←Q <sub>n-1</sub> (n= 1 to7) |
|       | H                      | ↑  | X   | L   | L      | Q <sub>n</sub> ←Q <sub>n-1</sub> (n= 1 to7) |
|       | H                      | ↑  | H   | H   | H      | Q <sub>n</sub> ←Q <sub>n-1</sub> (n= 1 to7) |

Note: 4. Signals asserted on DSA and DSB must be in place longer than T<sub>su</sub> (set up time) before CP occurs and remain in place T<sub>hold</sub> (hold time) after CP.

## Logic Diagram

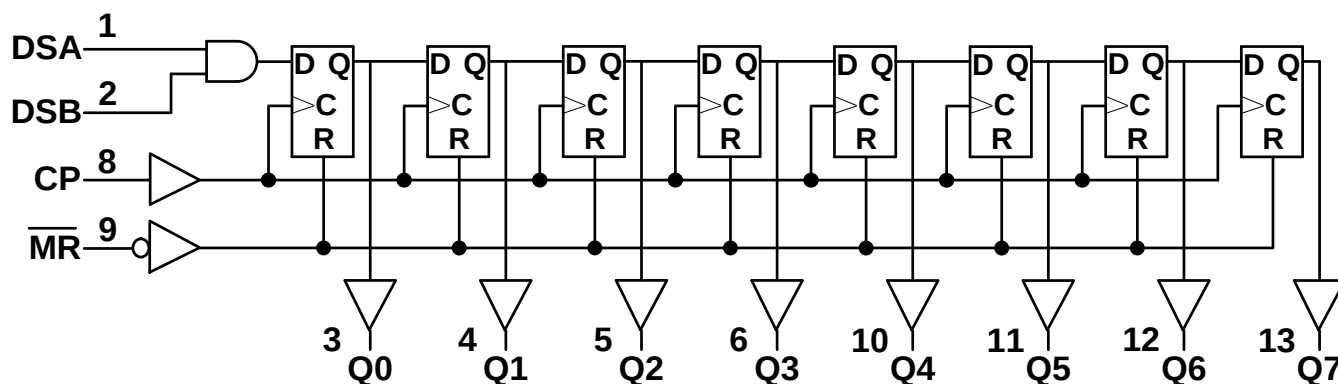

## Timing Diagram

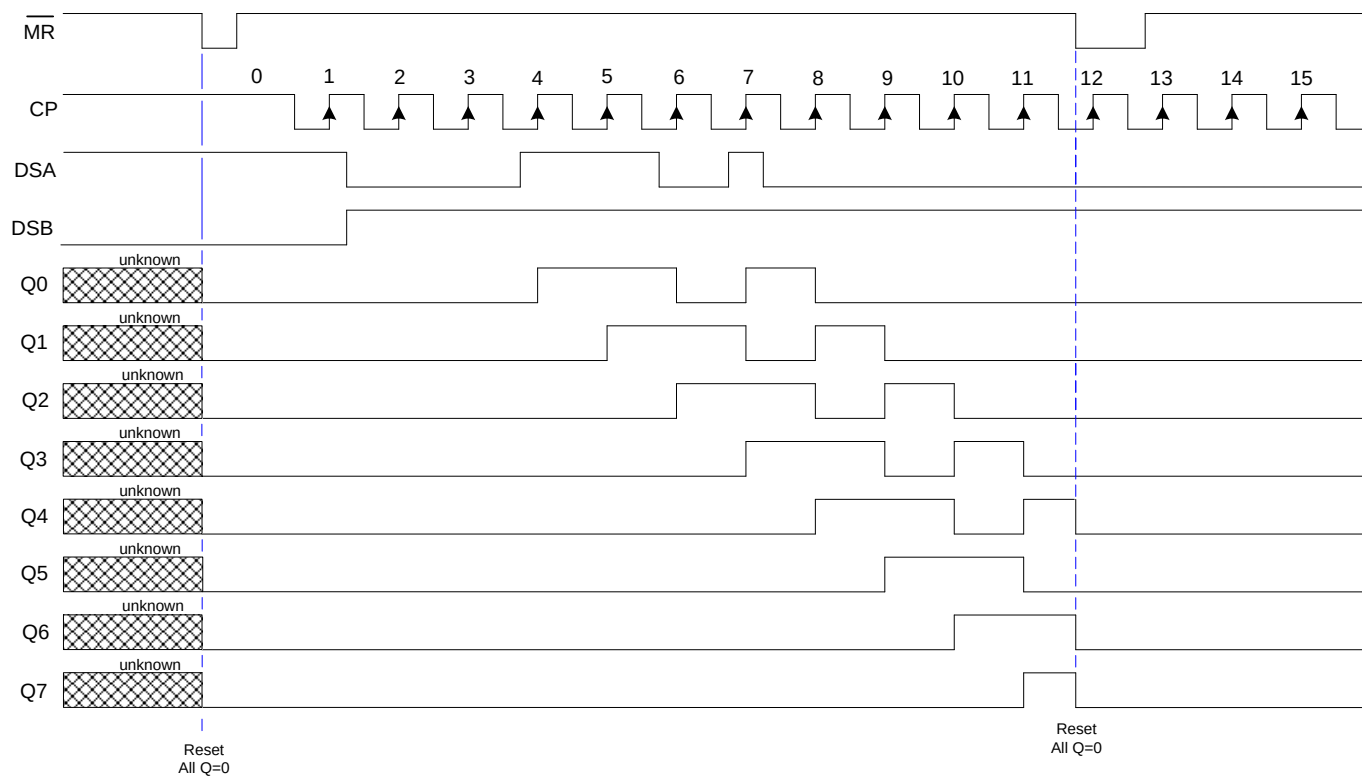

- Notes:
5. All Q values are reset to LOW when  $\overline{MR}$  goes low.  $\overline{MR}$  is asynchronous and overrides all other signals.
  6. Serial data supplied at DSA and DSB is AND'ed and transferred to Q0 on positive edge of CP.

## Absolute Maximum Ratings (Note 7) ( $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

| Symbol    | Description                                                               | Rating       | Unit             |
|-----------|---------------------------------------------------------------------------|--------------|------------------|
| ESD HBM   | Human Body Model ESD Protection                                           | 2            | kV               |
| ESD CDM   | Charged Device Model ESD Protection                                       | 1            | kV               |
| ESD MM    | Machine Model ESD Protection                                              | 200          | V                |
| $V_{CC}$  | Supply Voltage Range                                                      | -0.5 to +7.0 | V                |
| $V_I$     | Input Voltage Range (Note 8)                                              | -0.5 to +7.0 | V                |
| $I_{IK}$  | Input Clamp Current $V_I < -0.5\text{V}$                                  | -20          | mA               |
| $I_{OK}$  | Output Clamp Current $V_O < -0.5\text{V}$ or $V_O > V_{CC} + 0.5\text{V}$ | $\pm 20$     | mA               |
| $I_O$     | Continuous Output Current $-0.5\text{V} < V_O < V_{CC} + 0.5\text{V}$     | $\pm 25$     | mA               |
| $I_{CC}$  | Continuous Current Through $V_{CC}$                                       | 75           | mA               |
| $I_{GND}$ | Continuous Current Through GND                                            | -75          | mA               |
| $T_J$     | Operating Junction Temperature                                            | -40 to +150  | $^\circ\text{C}$ |
| $T_{STG}$ | Storage Temperature                                                       | -65 to +150  | $^\circ\text{C}$ |
| $P_{TOT}$ | Total Power Dissipation                                                   | 500          | mW               |

Notes: 7. Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.

8. Input Voltage cannot exceed  $V_{CC}$  to the extent the Maximum clamp current is exceeded.

## Recommended Operating Conditions (Note 9) ( $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

| Symbol              | Parameter                          | Conditions                              | Min | Max      | Unit             |
|---------------------|------------------------------------|-----------------------------------------|-----|----------|------------------|
| $V_{CC}$            | Supply Voltage                     | -                                       | 4.5 | 5.5      | V                |
| $V_I$               | Input Voltage                      | -                                       | 0   | 5.5      | V                |
| $V_O$               | Output Voltage                     | -                                       | 0   | $V_{CC}$ | V                |
| $\Delta t/\Delta V$ | Input transition rise or fall rate | $V_{CC} = 4.5\text{V}$ to $5.5\text{V}$ | -   | 20       | ns/V             |
| $T_A$               | Operating Free-Air Temperature     | -                                       | -40 | +125     | $^\circ\text{C}$ |

Note: 9. Unused inputs should be held at  $V_{CC}$  or Ground.

## Electrical Characteristics ( $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

| Symbol          | Parameter                 | Test Conditions                                                              | $V_{CC}$     | $T_A = +25^\circ\text{C}$ |      |           | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ |         | $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ |         | Unit          |
|-----------------|---------------------------|------------------------------------------------------------------------------|--------------|---------------------------|------|-----------|--------------------------------------------------|---------|---------------------------------------------------|---------|---------------|
|                 |                           |                                                                              |              | Min.                      | Typ. | Max.      | Min.                                             | Max.    | Min.                                              | Max.    |               |
| $V_{IH}$        | High-Level Input Voltage  | -                                                                            | 4.5V to 5.5V | 2.0                       | -    | -         | 2.0                                              | -       | 2.0                                               | -       | V             |
| $V_{IL}$        | Low-Level Input Voltage   | -                                                                            | 4.5V to 5.5V | -                         | -    | 0.8       | -                                                | 0.8     | -                                                 | 0.8     | V             |
| $V_{OH}$        | High-Level Output Voltage | $I_{OH} = -50\mu\text{A}$                                                    | 4.5V         | 4.4                       | 4.5  | -         | 4.4                                              | -       | 4.4                                               | -       | V             |
|                 |                           | $I_{OH} = -8\text{mA}$                                                       | 4.5V         | 3.94                      | -    | -         | 3.80                                             | -       | 3.70                                              | -       |               |
| $V_{OL}$        | Low-Level Output Voltage  | $I_{OL} = 50\mu\text{A}$                                                     | 4.5V         | -                         | 0    | 0.1       | -                                                | 0.1     | -                                                 | 0.1     | V             |
|                 |                           | $I_{OL} = 8\text{mA}$                                                        | 4.5V         | -                         | -    | 0.36      | -                                                | 0.44    | -                                                 | 0.55    |               |
| $I_I$           | Input Current             | $V_I = \text{GND}$ or $5.5\text{V}$                                          | 0V or 5.5V   | -                         | -    | $\pm 0.1$ | -                                                | $\pm 1$ | -                                                 | $\pm 2$ | $\mu\text{A}$ |
| $I_{CC}$        | Supply Current            | $V_I = \text{GND}$ or $V_{CC}$ , $I_O = 0\text{A}$                           | 5.5V         | -                         | -    | 4.0       | -                                                | 40      | -                                                 | 80      | $\mu\text{A}$ |
| $\Delta I_{CC}$ | Additional Supply Current | $V_I = V_{CC} - 2.1\text{V}$<br>$I_O = 0$<br>Other inputs at $V_{CC}$ or GND | 4.5V to 5.5V | -                         | -    | 1.35      | -                                                | 1.5     | -                                                 | 1.5     | mA            |


## Switching Characteristics

| Symbol / Parameter                   | Pins                         | Test Conditions<br>Figure 1                    | V <sub>CC</sub> | T <sub>A</sub> = +25°C |            |             | -40°C to +85°C |              | -40°C to +125°C |              | Unit |
|--------------------------------------|------------------------------|------------------------------------------------|-----------------|------------------------|------------|-------------|----------------|--------------|-----------------|--------------|------|
|                                      |                              |                                                |                 | Min                    | Typ.       | Max         | Min            | Max          | Min             | Max          |      |
| f <sub>MAX</sub><br>Maximum          | CP                           | C <sub>L</sub> = 15pF<br>C <sub>L</sub> = 50pF | 4.5V to<br>5.0V | 125<br>85              | 175<br>115 | -<br>-      | 105<br>75      | -<br>-       | 85<br>65        | -<br>-       | MHz  |
| t <sub>w</sub><br>Pulse Width        | CP<br>HIGH or<br>LOW         | -                                              | 4.5V to<br>5.0V | 5.0                    | -          | -           | 5.0            | -            | 5.0             | -            | ns   |
|                                      | $\overline{\text{MR}}$ LOW   | -                                              | 4.5V to<br>5.0V | 5.0                    | -          | -           | 5.0            | -            | 5.0             | -            | ns   |
| t <sub>SU</sub><br>Set-up Time       | DSA or<br>DSB to CP          | -                                              | 4.5V to<br>5.0V | 4.5                    | -          | -           | 4.5            | -            | 4.5             | -            | ns   |
| t <sub>H</sub><br>Hold Time          | DSA or<br>DSB to CP          | -                                              | 4.5V to<br>5.0V | 2.0                    | -          | -           | 2.0            | -            | 2.0             | -            | ns   |
| t <sub>PD</sub><br>Propagation       | CP to Qn                     | C <sub>L</sub> = 15pF<br>C <sub>L</sub> = 50pF | 4.5V to<br>5.0V | -<br>-                 | 3.4<br>4.9 | 9.0<br>11.0 | 1.0<br>1.0     | 10.5<br>12.5 | 1.0<br>1.0      | 11.5<br>14.0 | ns   |
| t <sub>rec</sub><br>Recovery<br>Time | $\overline{\text{MR}}$ to CP | -                                              | 4.5V to<br>5.0V | 2.5                    | -          | -           | 2.5            | -            | -               | 2.5          | ns   |
| t <sub>PHL</sub><br>HIGH to LOW      | $\overline{\text{MR}}$ to Qn | C <sub>L</sub> = 15pF<br>C <sub>L</sub> = 50pF | 4.5V to<br>5.0V | -<br>-                 | 3.5<br>5.0 | 8.6<br>10.6 | 1.0<br>1.0     | 10.0<br>12.0 | 1.0<br>1.0      | 11.0<br>13.5 | ns   |


## Operating Characteristics (T<sub>A</sub> = +25°C, unless otherwise specified.)

| Parameter       |                                        | Test Conditions                           | V <sub>CC</sub> = 5.5V | Unit |
|-----------------|----------------------------------------|-------------------------------------------|------------------------|------|
|                 |                                        |                                           | Typ                    |      |
| C <sub>pd</sub> | Power Dissipation Capacitance per Gate | f = 1 MHz                                 | 51                     | pF   |
| C <sub>i</sub>  | Input Capacitance                      | V <sub>I</sub> = V <sub>CC</sub> – or GND | 3.5                    | pF   |


# Parameter Measurement Information




| $V_{CC}$  | Inputs |                   | $V_M$ |            | $C_L$      |
|-----------|--------|-------------------|-------|------------|------------|
|           | $V_I$  | $t_r/t_f$         | Input | Output     |            |
| 4.5V-5.5V | 3.0V   | $\leq 3\text{ns}$ | 1.5V  | $V_{CC}/2$ | 15pF, 50pF |

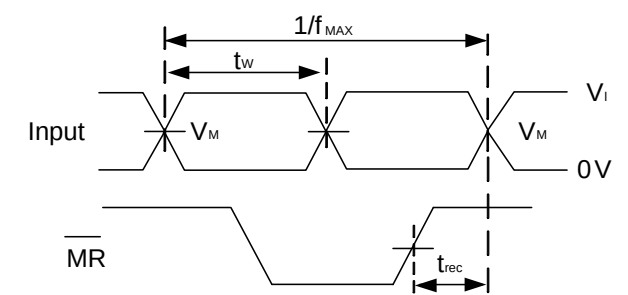

**Voltage Waveform  
Pulse Duration and Recovery Time**

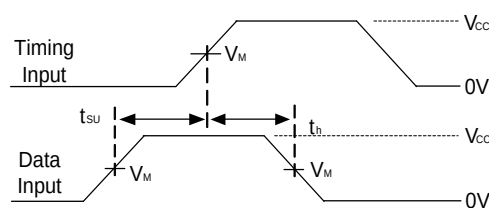

**Voltage Waveform  
Set-up and Hold Times**

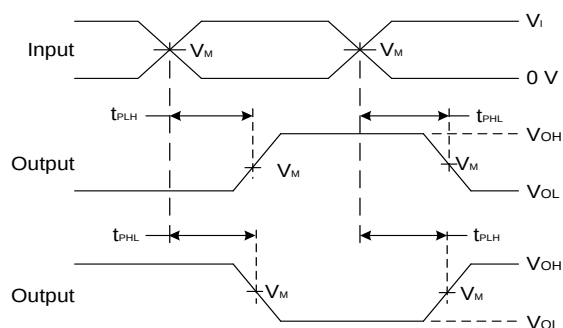


**Voltage Waveform  
Propagation Delay Times  
Inverting and Non Inverting Outputs**

- Notes:
- A. Includes test lead and test apparatus capacitance.
  - B. All pulses are supplied at pulse repetition rate  $\leq 10\text{ MHz}$
  - C. Inputs are measured separately one transition per measurement
  - D.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$

**Figure 1 Load Circuit and Voltage Waveforms**


## Ordering Information

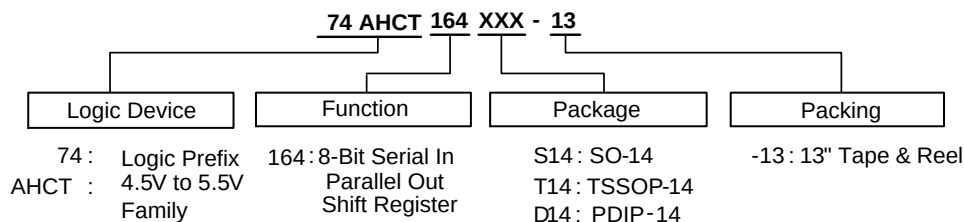

| Device                         | Package Code | Packaging | Packing          |                    |
|--------------------------------|--------------|-----------|------------------|--------------------|
|                                |              |           | Quantity         | Part Number Suffix |
| 74AHCT164S14-13                | S14          | SO-14     | 2500/Tape & Reel | -13                |
| 74AHCT164T14-13                | T14          | TSSOP-14  | 2500/Tape & Reel | -13                |
| 74AHCT164D14<br>Future Product | D14          | PDIP-14   | Tube             | -                  |

## Marking Information

(1) SO-14, TSSOP-14, PDIP-14

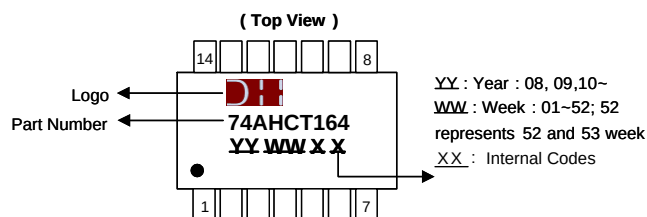


| Part Number     | Package  |
|-----------------|----------|
| 74AHCT164S14-13 | SO-14    |
| 74AHCT164T14-13 | TSSOP-14 |
| 74AHCT164D14    | PDIP-14  |

# **Package Outline Dimensions** (All dimensions in mm.)


Please see AP02002 at <http://www.diodes.com/datasheets/ap02002.pdf> for latest version.

## **Package Type: SO-14**

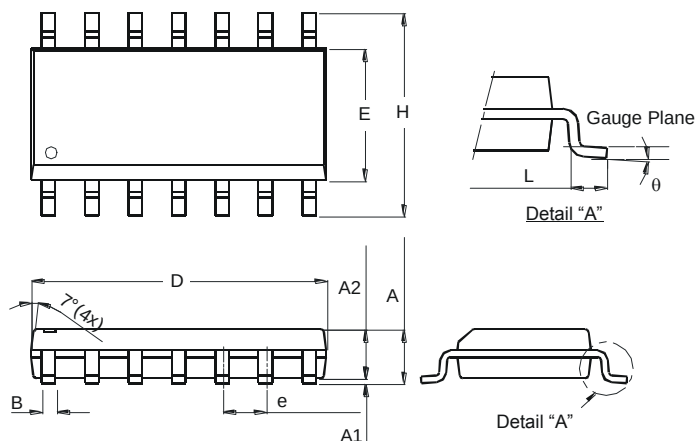


| SO-14                |          |      |
|----------------------|----------|------|
| Dim                  | Min      | Max  |
| A                    | 1.47     | 1.73 |
| A1                   | 0.10     | 0.25 |
| A2                   | 1.45 Typ |      |
| B                    | 0.33     | 0.51 |
| D                    | 8.53     | 8.74 |
| E                    | 3.80     | 3.99 |
| e                    | 1.27 Typ |      |
| H                    | 5.80     | 6.20 |
| L                    | 0.38     | 1.27 |
| θ                    | 0°       | 8°   |
| All Dimensions in mm |          |      |

## **Package Type: TSSOP-14**

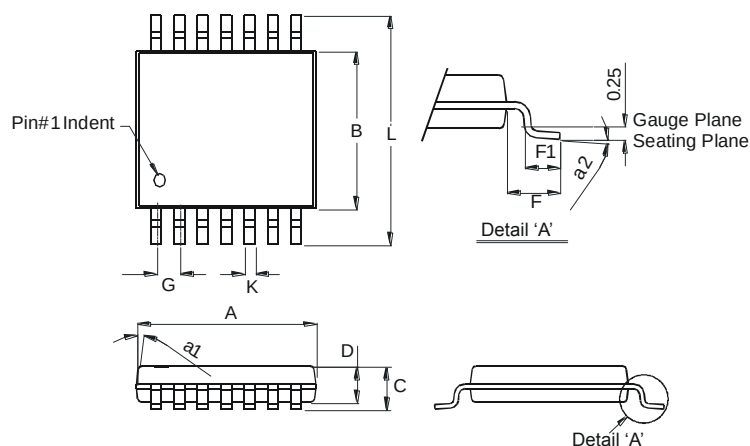

| TSSOP-14             |          |      |
|----------------------|----------|------|
| Dim                  | Min      | Max  |
| a1                   | 7° (4X)  |      |
| a2                   | 0°       | 8°   |
| A                    | 4.9      | 5.10 |
| B                    | 4.30     | 4.50 |
| C                    | —        | 1.2  |
| D                    | 0.8      | 1.05 |
| F                    | 1.00 Typ |      |
| F1                   | 0.45     | 0.75 |
| G                    | 0.65 Typ |      |
| K                    | 0.19     | 0.30 |
| L                    | 6.40 Typ |      |
| All Dimensions in mm |          |      |

## **Package Type: PDIP-14**

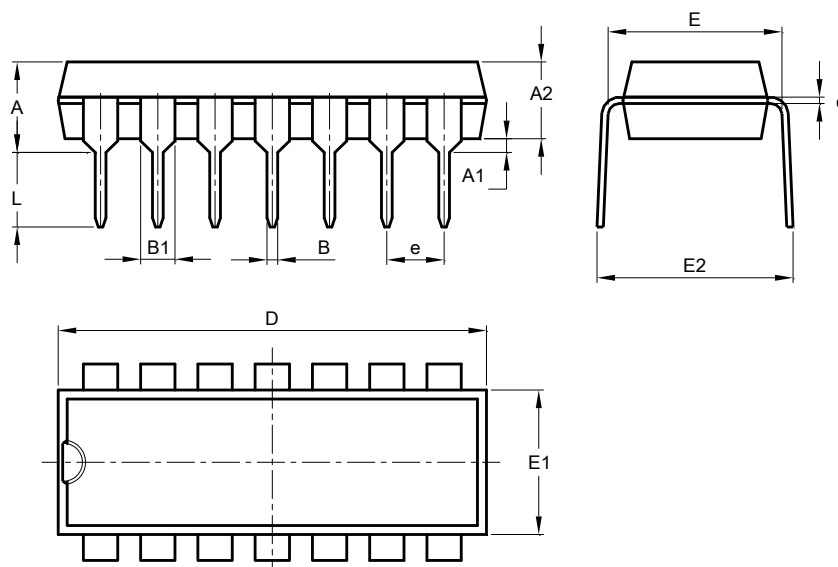


| PDIP-14              |             |        |
|----------------------|-------------|--------|
| Dim                  | Min         | Max    |
| A                    | 3.710       | 4.310  |
| A1                   | 0.510       | —      |
| A2                   | 3.200       | 3.600  |
| B                    | 0.380       | 0.570  |
| B1                   | 1.524 (BSC) |        |
| c                    | 0.204       | 0.360  |
| D                    | 18.800      | 19.200 |
| E                    | 6.200       | 6.600  |
| E1                   | 7.320       | 7.920  |
| E2                   | 8.400       | 9.000  |
| e                    | 2.540 (BSC) |        |
| L                    | 3.000       | 3.600  |
| All Dimensions in mm |             |        |



## Suggested Pad Layout


Please see AP02001 at <http://www.diodes.com/datasheets/ap02001.pdf> for latest version.

Package Type: SO-14

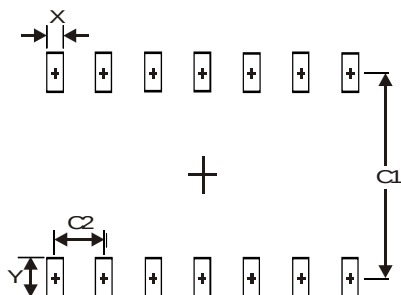

| Dimensions | Value (in mm) |
|------------|---------------|
| X          | 0.60          |
| Y          | 1.50          |
| C1         | 5.4           |
| C2         | 1.27          |

Package Type: TSSOP-14

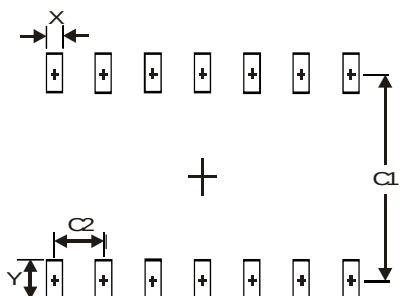

| Dimensions | Value (in mm) |
|------------|---------------|
| X          | 0.45          |
| Y          | 1.45          |
| C1         | 5.9           |
| C2         | 0.65          |

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331