

## 380-115 EMI/RFI Non-Environmental Backshell with Strain Relief Type B - Rotatable Coupling - Low Profile








### CONNECTOR DESIGNATORS

MIL-DTL-38999 Series I, II (F)  
MIL-DTL-38999 Series III and IV (H)


## A-F-H-L-S

### ROTATABLE COUPLING


### TYPE B INDIVIDUAL AND/OR OVERALL SHIELD TERMINATION

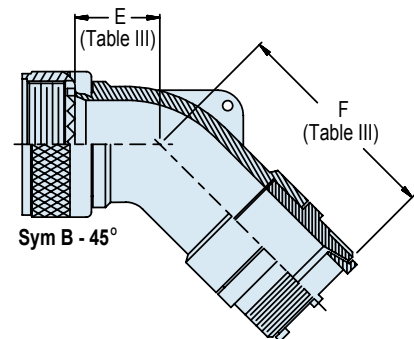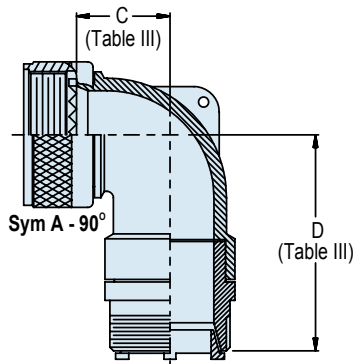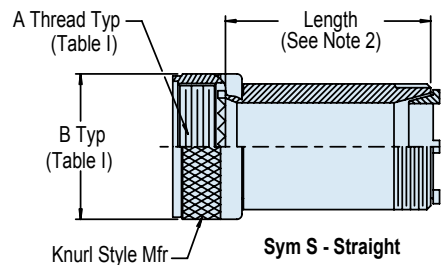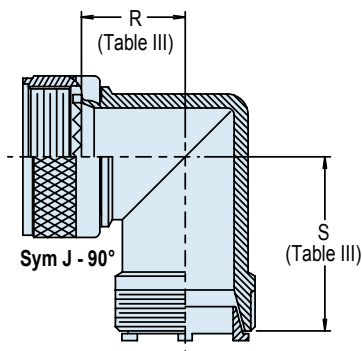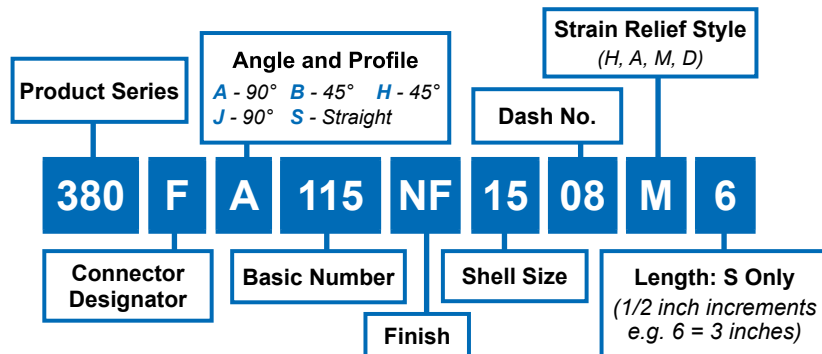

**STYLE H**  
Heavy Duty  
(Table VI)




**STYLE A**  
Medium Duty  
(Table V)



**STYLE M**  
Medium Duty  
(Table V)



**STYLE D**  
Medium Duty  
(Table V)



# 380-115

## EMI/RFI Non-Environmental Backshell

### with Strain Relief

### Type B - Rotatable Coupling - Low Profile



38

| TABLE III: ELBOW DIMENSIONS |    |    |              |              |              |              |               |               |               |
|-----------------------------|----|----|--------------|--------------|--------------|--------------|---------------|---------------|---------------|
| Shell Size                  |    |    | C            | D            | E            | F            | R             | S             | T             |
| A                           | F  | L  | Max          | Max          | Max          | Max          | Max           | Max           | Max           |
| 08                          | 08 | 09 | .500 (12.7)  | 1.684 (42.8) | .457 (11.6)  | 1.674 (42.5) | .910 (23.11)  | 1.910 (48.77) | .780 (19.81)  |
| 10                          | 10 | 11 | .595 (15.1)  | 1.804 (45.8) | .520 (13.2)  | 1.734 (44.0) | .970 (24.64)  | 1.970 (50.04) | .810 (20.57)  |
| 12                          | 12 | 13 | .610 (15.5)  | 1.824 (46.3) | .582 (14.8)  | 1.794 (45.6) | 1.030 (26.16) | 2.030 (50.56) | .830 (21.08)  |
| 14                          | 14 | 15 | .700 (17.8)  | 1.894 (48.1) | .645 (16.4)  | 1.884 (47.9) | 1.090 (27.68) | 2.090 (53.09) | .850 (21.59)  |
| 16                          | 16 | 17 | .885 (22.5)  | 1.984 (50.4) | .738 (18.7)  | 1.994 (50.6) | 1.150 (29.21) | 2.150 (54.61) | .880 (22.35)  |
| 18                          | 18 | 19 | .975 (24.8)  | 2.154 (54.7) | .926 (23.5)  | 2.184 (55.5) | 1.200 (30.48) | 2.200 (55.88) | .900 (22.86)  |
| 20                          | 20 | 21 | .975 (24.8)  | 2.154 (54.7) | .926 (23.5)  | 2.184 (55.5) | 1.270 (32.26) | 2.270 (57.66) | .930 (23.62)  |
| 22                          | 22 | 23 | 1.125 (28.6) | 2.264 (57.5) | 1.020 (25.9) | 2.334 (59.3) | 1.330 (33.78) | 2.330 (59.18) | .950 (24.13)  |
| 24                          | 24 | 25 | 1.125 (28.6) | 2.264 (57.5) | 1.020 (25.9) | 2.334 (59.3) | 1.390 (35.31) | 2.390 (60.71) | .980 (24.13)  |
| 28                          |    |    | 1.225 (31.1) | 2.434 (61.8) | 1.145 (29.1) | 2.384 (60.6) | 1.460 (37.08) | 2.460 (62.48) | 1.150 (29.21) |
| 32                          |    |    | 1.575 (40.0) | 2.684 (68.2) | 1.207 (30.7) | 2.484 (63.1) | 1.590 (40.38) | 2.590 (65.79) | 1.210 (30.73) |
| 36                          |    |    | 1.775 (45.1) | 2.684 (68.2) | 1.238 (31.4) | 2.574 (65.4) | 1.690 (42.93) | 2.690 (68.33) | 1.240 (31.50) |
| 40                          |    |    | N/A          | N/A          | N/A          | N/A          | 1.900 (48.26) | 2.200 (55.88) | 1.250 (31.75) |
| 44                          |    |    | N/A          | N/A          | N/A          | N/A          | 2.030 (51.56) | 2.360 (59.94) | 1.300 (33.02) |
| 48                          |    |    | N/A          | N/A          | N/A          | N/A          | 2.180 (53.37) | 2.530 (64.26) | 1.370 (34.79) |
| 61                          |    |    | N/A          | N/A          | N/A          | N/A          | 1.290 (32.76) | 1.490 (37.85) | .880 (22.35)  |

| TABLE II: FINISHES |                                                        |
|--------------------|--------------------------------------------------------|
| Sym                | Finish                                                 |
| B                  | Cadmium Plate, Olive Drab                              |
| C*                 | Anodize, Black                                         |
| G*                 | Hard Coat, Anodic                                      |
| J                  | Gold Iridite over Cadmium Plate over Nickel            |
| LF                 | Cadmium Plate, Bright over Electroless Nickel          |
| M                  | Electroless Nickel                                     |
| N                  | Cadmium Plate, Olive Drab over Nickel                  |
| NC                 | Zinc Cobalt, Dark Olive Drab                           |
| NF                 | Cad/O.D. over Electroless Nickel (1000 Hr. Salt Spray) |
| T                  | Cadmium Plate, Bright Dip over Nickel                  |
| U**                | Cadmium Plate, Black                                   |
| UC                 | Zinc Cobalt, Black                                     |
| Z1**               | Passivate                                              |
| ZN                 | Zinc Nickel, Olive Drab                                |

| TABLE IV: CABLE CLAMP CABLE RANGE |              |              |              |              |
|-----------------------------------|--------------|--------------|--------------|--------------|
| Dash No.                          | N Max        | P Max        | Cable Range  |              |
|                                   |              |              | Min          | Max          |
| 04                                | .780 (19.8)  | .957 (24.3)  | .125 (3.2)   | .312 (7.9)   |
| 06                                | .780 (19.8)  | 1.145 (29.1) | .250 (6.4)   | .437 (11.1)  |
| 08                                | .780 (19.8)  | 1.332 (33.8) | .312 (7.9)   | .562 (14.3)  |
| 10                                | .780 (19.8)  | 1.332 (33.8) | .350 (8.9)   | .625 (15.9)  |
| 12                                | .811 (20.6)  | 1.551 (39.4) | .500 (12.7)  | .750 (19.1)  |
| 16                                | .905 (23.0)  | 1.770 (45.0) | .625 (15.9)  | .937 (23.8)  |
| 20                                | 1.092 (27.7) | 2.113 (53.7) | .875 (22.2)  | 1.250 (31.8) |
| 24                                | 1.124 (28.5) | 2.363 (60.0) | 1.000 (25.4) | 1.375 (34.9) |
| 28                                | 1.399 (35.5) | 2.770 (70.4) | 1.250 (31.8) | 1.625 (41.3) |
| 32                                | 1.399 (35.5) | 3.020 (76.7) | 1.437 (36.5) | 1.875 (47.6) |

| TABLE V: CABLE CLAMP CABLE RANGE |              |              |              |              |              |              |
|----------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Dash No.                         | J Max        | K Max        | L Max        | M Max        | Cable Range  |              |
|                                  |              |              |              |              | Min**        | Max          |
| 03*                              | .437 (11.1)  | .760 (19.3)  | .843 (21.4)  | .630 (16.0)  | .156 (4.0)   | .250 (6.4)   |
| 04*                              | .437 (11.1)  | .760 (19.3)  | .906 (23.0)  | .755 (19.2)  | .188 (4.8)   | .312 (7.9)   |
| 06*                              | .500 (12.7)  | .760 (19.3)  | 1.093 (27.8) | .942 (23.9)  | .281 (7.1)   | .438 (11.1)  |
| 08                               | .563 (14.3)  | .760 (19.3)  | 1.187 (30.1) | 1.067 (27.1) | .344 (8.7)   | .562 (14.3)  |
| 10                               | .563 (14.3)  | .760 (19.3)  | 1.281 (32.5) | 1.192 (30.3) | .375 (9.5)   | .625 (15.9)  |
| 12                               | .563 (14.3)  | .760 (19.3)  | 1.500 (38.1) | 1.380 (35.1) | .438 (11.1)  | .750 (19.1)  |
| 16                               | .656 (16.7)  | 1.073 (27.3) | 1.719 (43.7) | 1.535 (39.0) | .562 (14.3)  | .938 (23.8)  |
| 20                               | .656 (16.7)  | 1.323 (33.6) | 2.062 (52.4) | 1.848 (46.9) | .750 (19.1)  | 1.250 (31.8) |
| 24                               | .656 (16.7)  | 1.323 (33.6) | 2.312 (58.7) | 2.255 (57.3) | .781 (19.8)  | 1.375 (34.9) |
| 28                               | 1.188 (30.2) | 1.572 (39.9) | 2.719 (69.1) | 2.505 (63.6) | .969 (24.6)  | 1.625 (41.3) |
| 32*                              | 1.187 (30.1) | 1.572 (39.9) | 2.969 (75.4) | 2.755 (70.0) | 1.125 (28.6) | 1.875 (47.6) |
| 40*                              | 1.125 (28.6) | 1.572 (39.9) | 3.531 (89.7) | 3.255 (82.7) | 1.469 (37.3) | 2.375 (60.3) |

\* Not available in Style M clamp.

\*\* Not Applicable Style D

#### APPLICATION NOTES

- Assembly identified with manufacturer's name and part number, space permitting.
- Standard minimum length for Style I is 1.500 inches, Style II standard length is 2.000 inches. For shorter lengths consult factory. Applies to Symbol S only.
- When cable range exceeds Max Entry shown in Table IV, Style II will be supplied. Note: C, D, E, F, R, S, T and U dimensions do not apply to Style II.
- Metric dimensions are in parentheses.
- For effective grounding, connector with conductive finish should be used.
- Glenair Series 600 Backshell Assembly Tools are recommended for assembly and installation.
- Material/Finish:  
Elbow, adapter, coupling nut, ferrules and clamp - Aluminum alloy or SST/Table II.  
Hardware - CRES/Passivate
- Angular functions A and B are currently not available in shell sizes 40, 44 and 61. Consult factory for suitable alternatives.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331