

# DEVKIT+ZVL128 QUICK START GUIDE (QSG)

ULTRA-RELIABLE MCUs FOR  
INDUSTRIAL AND AUTOMOTIVE



EXTERNAL USE




SECURE CONNECTIONS  
FOR A SMARTER WORLD

# Get to know the DEVKIT-ZVL128

The DEVKIT-ZVL128 is an ultra-low-cost development platform for S12 Microcontrollers.

Features include easy access to all MCU I/O's, a standard-based form factor compatible with the Arduino™ pin layout, providing a broad range of expansion board options, and an USB serial port interface for connection to the IDE, the board has option to be powered via USB or an external power supply.

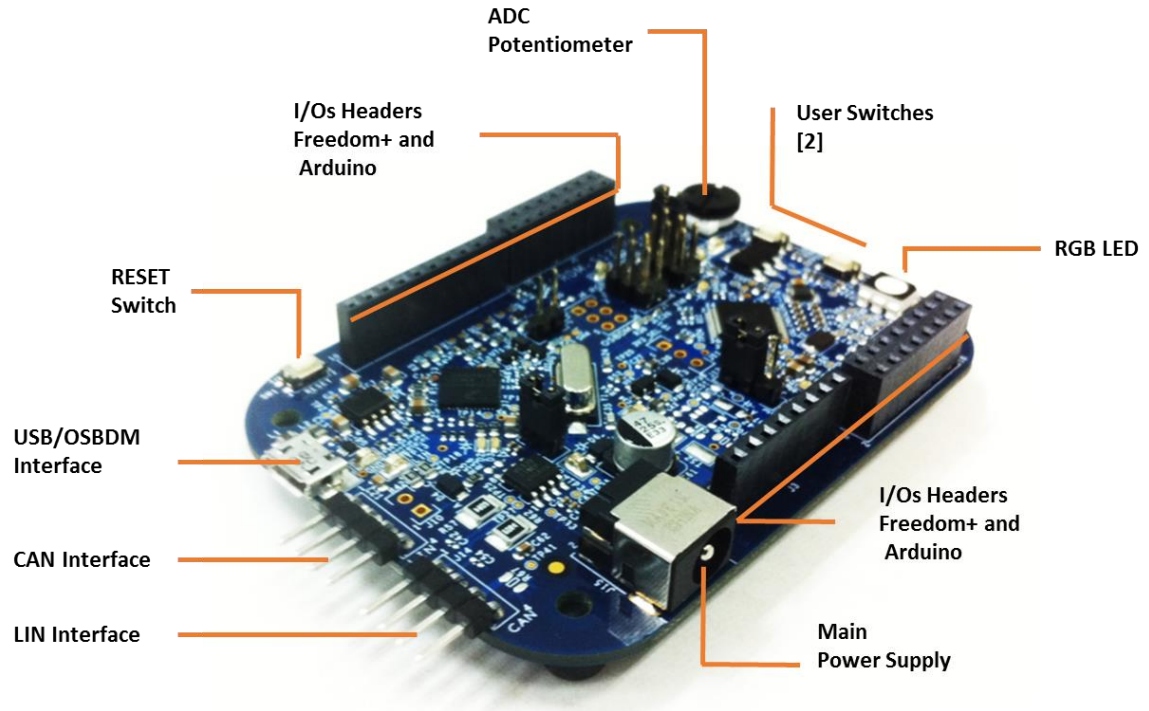


**DEVKIT-ZVL128  
Features**

# Power Supply and Communications

DESCRIPTION	NAME	PIN
	LIN	J12-01
	VBAT	J12-02
	NC	J12-03
	GND	J12-04


DESCRIPTION	NAME	PIN
	CANH	J8-01
	CANL	J8-02
	VBAT	J8-03
	GND	J8-04

DESCRIPTION	NAME	PIN
	VBAT	J1-01
	GND	J1-03

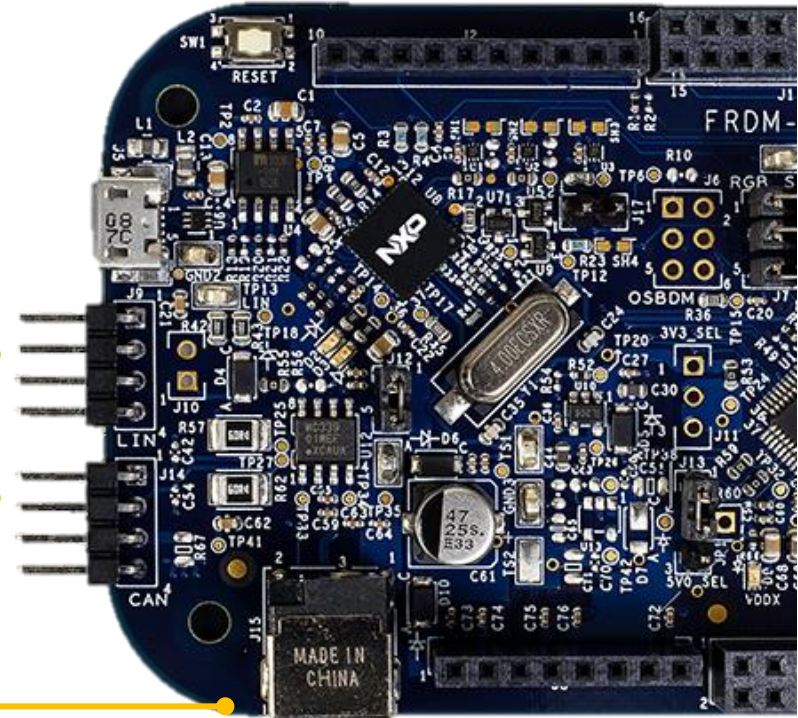

High-speed CAN interface

# Input/Output Connectors

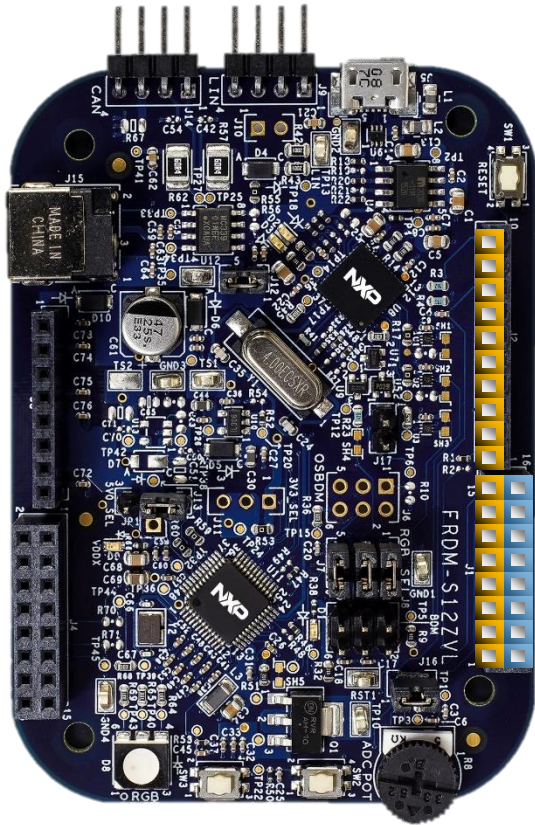

J2

J1


PIN	PORT	FUNCTION	J2
J2-01	PT7	GPIO	■
J2-02	PP7	GPIO	■
J2-03	PS3	SS	■
J2-04	PS1	MOSI	■
J2-05	PS0	MISO	■
J2-06	PS2	SCK	■
J2-07	GND	GND	■
J2-08	PAD0	AN0	■
J2-09	PJ0	SDA	■
J2-10	PJ1	SCL	■

PIN	PORT	FUNCTION	J1	PIN	PORT	FUNCTION
J1-01	PT4	RXD1	■ ■	J1-02	PT2	GPIO
J1-03	PT5	TXD1	■ ■	J1-04	PT3	GPIO
J1-05	PP0	PWM0	■ ■	J1-06	PT6	GPIO
J1-07	PP1	PWM1	■ ■	J1-08		
J1-09	PP2	PWM2	■ ■	J1-10		
J1-11	PP3	PWM3	■ ■	J1-12		
J1-13	PP4	PWM4	■ ■	J1-14		
J1-15	PP5	PWM5	■ ■	J1-16		

## Arduino Compatibility

The internal rows of the I/O headers on the DEVKIT-ZVL128 are arranged to fulfill Arduino™ shields compatibility.

# Input/Output Connectors

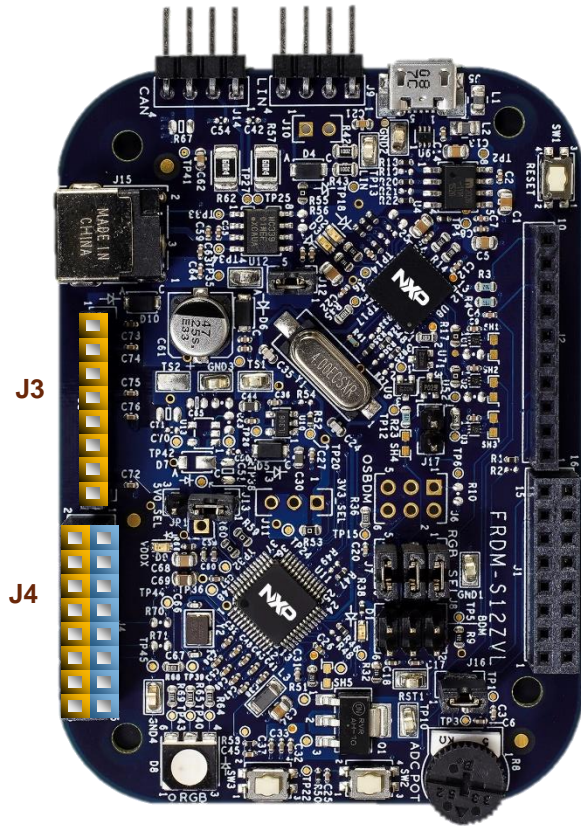


## Arduino Compatibility

The internal rows of the I/O headers on the DEVKIT-ZVL128 are arranged to fulfill Arduino™ shields compatibility.

PIN	PORT	FUNCTION	J3
J3-01		VBAT	■
J3-02		VDDX	■
J3-03		RESET_B	■
J3-04		P3V3	■
J3-05		P5V0	■
J3-06		GND	■
J3-07		GND	■
J3-08		VBAT	■

PIN	PORT	FUNCTION	J4	PIN	PORT	FUNCTION
J4-02			■	J4-01	PAD7	AN7
J4-04			■	J4-03	PAD6	AN6
J4-06			■	J4-05	PAD5	AN5
J4-08			■	J4-07	PAD4	AN4
J4-10			■	J4-09	PAD3	AN3/SDA
J4-12	PL0	HVIO	■	J4-11	PAD2	AN2/SCL
J4-14	PAD8	AN8	■	J4-13	PAD1	AN1
J3416	PAD9	AN9	■	J4-15	PAD0	AN0

# Default jumpers

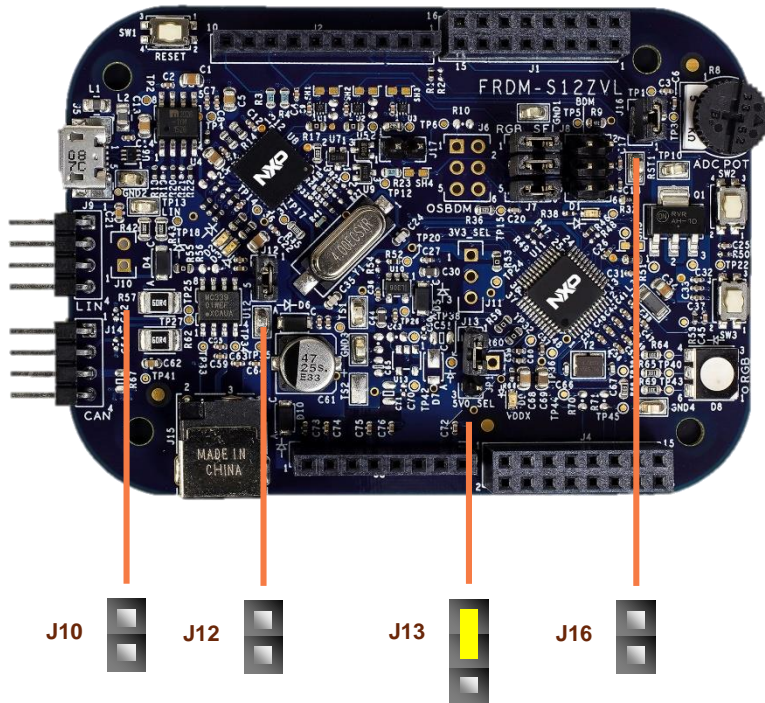


REF	POSITION	DESCRIPTION
J10	OPEN	Enable LIN Master mode
J12	1 - 2	This link connects VLIN[+12V] Input voltage is routed to VSUP
J13	1 - 2	ADC potentiometer is routed to AN0
J16	1 - 2	ADC potentiometer is routed to AN2

## CAUTION:

When powered from the USB bus, do not exceed the 500mA maximum allowable current drain. Damage to the target board or host PC may result.

# Programming interface and User Peripherals

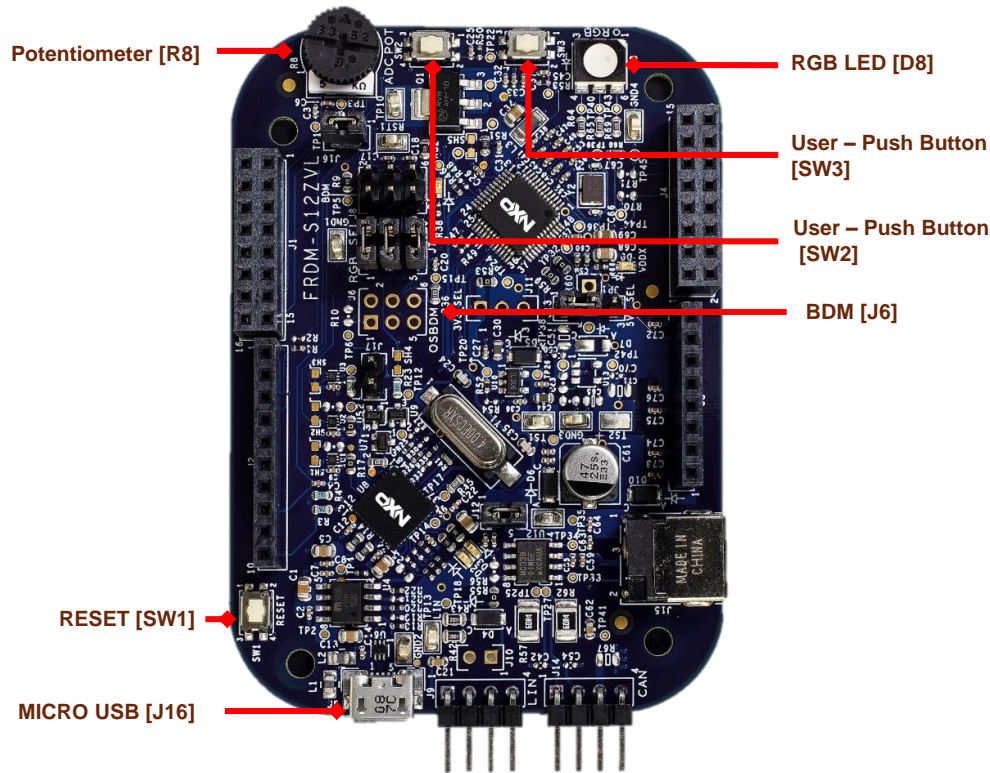

Peripheral	ID	MCU Port	Description
Buttons	SW2	PP4	User switch (Active high)
	SW3	PP7	User switch (Active high)
	SW1	RESET	RESET Switch
Potentiometers	R8	AN0	Potentiometer connected to ADC port AN0/AN1
LED	D9	PP3	RGB LED - Green
		PP1	RGB LED - Red
		PP5	RGB LED - Blue
	D2	-	OSBDM PWR LED, ON when OSBDM is successfully enumerated as USB device.
	D3	-	OSBDM STATUS LED. ON when OSBDM is successfully transmitting as USB device.
	D9	VDDX	MCU Power LED Indicator. ON when VDDX is regulating to +5V/+3.3V
Communication	D1	RESET	RESET LED Indicator
	J1	-	OSBDM USB
	J11/J9	LIN	LIN Interface
	J23/J2	CANH	CAN Interface

# Step-by-Step Installation Instructions

In this quick start guide, you will learn how to set up the **DEVKIT-ZVL128** board and run the default exercise.



1

## Install Software and Tools

Install CodeWarrior Development Studio for S12Z 10.6(Eclipse).

2

## Connect the USB Cable

Connect one end of the USB cable to the PC and the other end to the mini-B connector on the DEVKIT-ZVL128 board. Allow the PC to automatically configure the USB drivers if needed.

3

## Using the Example Project

The pre-loaded example project utilizes the **DEVKIT-ZVL128** potentiometer and the RGB LED. Once the board is plugged in you can adjust the potentiometer and the RGB LEDs should illuminate/de-illuminate in response. Each color will change when the potentiometer position is adjusted.

4

## Learn More About the S12ZVL

Read the release notes and documentation on the [freescale.com/S12ZVL](http://freescale.com/S12ZVL).

- The Processor Expert graphical initialization software included in your CodeWarrior installation will help reduce your time to market
- CodeWarrior for S12Z with examples




# Documentation and References

## Application Notes

- AN4842, S12ZVL LIN Enabled RGB LED Lighting Application
- AN4841, S12ZVL LIN Enabled Ultrasonic Distance Measurement
- AN5082, MagniV in 24V Applications

## Reference Manual and Datasheet

- MC9S12ZVL Family Reference Manual and Datasheet

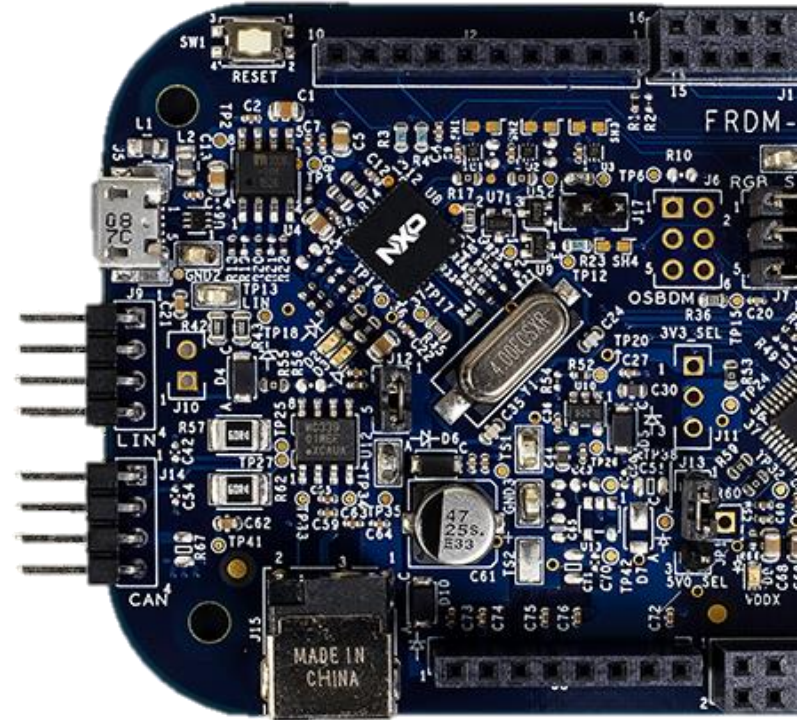

For more information please visit : [www.nxp.com/s12zvl](http://www.nxp.com/s12zvl)

# Development Tools Ecosystem

## Compilers

- Codewarrior S12Z
- Cosmic

## IDE

- Codewarrior
- Cosmic Zap

## Programmiers


- P&E
- Cyclone Pro Programmer

## Debugger

- CW & P&E S12 Debugger
- Cosmic Zap Debugger
- iSYSTEM winIDEA

## Support Tools:

- FREEMASTER run time debugger and for instrumentation/calibration

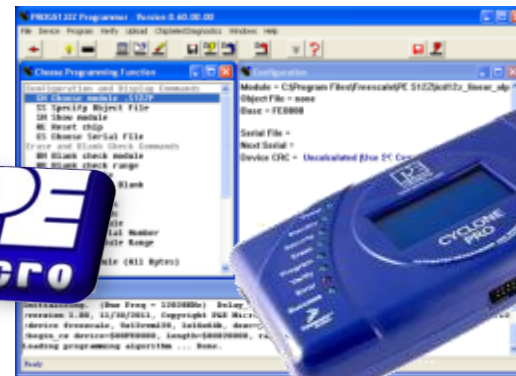



SECURE CONNECTIONS  
FOR A SMARTER WORLD



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331