



AA SERIES PHOTOCONTROL

THERMAL, BUTTON STYLE, WIRE - IN DESIGN

KEY FEATURES

- 3/4in long threaded nipple
- 30 - 45 second time delay
- UL and CSA Listed
- Durable polycarbonate housing
- 1800 and 1200 watt load rating
- Fail mode is ON

TE Connectivity's (TE) AA Series offers a unique button style design for internal post fixtures or mounting applications. Common uses include decorative light fixtures, post lanterns, wall mount applications, and other commercial and residential uses. TE's innovative design with the wire leads exiting from the rear allow the control to be placed in tight locations while positioning the wiring for easy access.

The AA Series photocontrol is constructed of a high impact UV stabilized polycarbonate housing for superior quality. The 105W and 1068W controls include a brushed aluminum wall plate for installation in standard outlet boxes.

The 105M and 1068M are equipped with a 180 Joule Metal Oxide Varistor (MOV) and are designed to protect luminaires where transient voltage surges are a frequent and recurring problem.


The 105HA is a high ambient temperature photocontrol, designed specifically to last longer in today's hotter running HID luminaires. This unit incorporates insulation and heat sink to absorb the heat generated by the lamp and other components, significantly adding to the control's useful life.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

AA Series Photocontrol



TE's photocontrols can be used to safely control luminaries with incandescent, HID, LED, or compact fluorescent lamps.

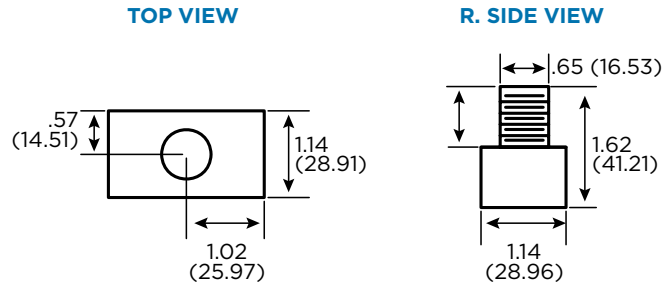

Dimensions shown in inches (mm)

PRODUCT SELECTION INFORMATION

Description	Product Information	Rated Volts	Range (Volts)	Load Rating Tungsten (Watts)	Load Rating Ballast (VA)	Surge Protection (Joules)	Turn ON (Fc)	OFF/ON Ratio
AA-105		120	105 - 130	1800	1100		1.5	4 : 1
AA-105W	w/Wall Plate	120	105 - 130	1800	1100		1.5	4 : 1
AA-1068		208/240/277	185 - 305	1200	1100		1.5	4 : 1
AA-1068W	w/Wall Plate	208/240/277	185 - 305	1200	1100		1.5	4 : 1
AA-305		120	105 - 130	300	840		1.5	4 : 1
AA-105M	15" Leads	120	105 - 130	1800	1100	180	1.5	4 : 1
AA-1068M	15" Leads	208/240/277	185 - 305	1200	1100	180	1.5	4 : 1
AA-105HA	High Ambient	120	105 - 130	1800	1100		1.5	4 : 1

Note: 6" lead wires unless otherwise noted

SPECIFICATION

Physical	Dimensions: approx. 2.05" [51.94mm] dia. x 1.62" [41.21mm] high (Not including wiring)
	Enclosure: designed to meet ANSI C136.24, UL 773A
	Power consumption: less than 0.9 watts at 120 VAC
Temperature	Minus 40°C to plus 65°C at 96% RH
Control	Thermal State Switch Type
Light Sensor	Cadmium Sulfide Cell

TECHNICAL INFORMATION

Switch	SPST thermal bi-metallic, exceeds 7,500 ON/OFF operations
Fail Mode	ON (contacts normally closed)
Housing	Polycarbonate with UV stabilized window
Lead Wires	6", #18 AWG, rated 105°C (AA controls) 15", #18 AWG, rated 105°C (AA-M controls) 6", #18 AWG, rated 150°C (AA-HA controls)
Nipple	3/8" pipe
Nut	3/8" pipe, thermoplastic
Light Sensor	1/2" Cadmium sulfide (CdS) cell



te.com/energy

©2008, 2012, 2014 TE Connectivity Ltd. family of companies. All Rights Reserved. 7-1773453-6 E328 10/2014

TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

FOR MORE INFORMATION: TE Technical Support Centers

USA:	+1 800 327 6996
France:	+33 380 583 200
UK:	+44 0870 870 7500
Germany:	+49 896 089 903
Spain:	+34 916 630 400
Benelux:	+32 16 351 731
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
China:	+86 (0) 400-820-6015



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331