


- RoHS Compliant and Halogen Free ①
- Low Profile (<0.7 mm)
- Dual Sided Cooling Compatible ①
- Ultra Low Package Inductance
- Optimized for High Frequency Switching ①
- Ideal for CPU Core DC-DC Converters
- Optimized for Control FET application①
- Low Conduction and Switching Losses
- Compatible with existing Surface Mount Techniques ①
- 100% Rg tested

Typical values (unless otherwise specified)

| $V_{DSS}$  | $V_{GS}$ | $R_{DS(on)}$ | $R_{DS(on)}$ |           |              |
|------------|----------|--------------|--------------|-----------|--------------|
| 30V max    | ±20V max | 5.1mΩ @ 10V  | 8.5mΩ @ 4.5V |           |              |
| $Q_g\ tot$ | $Q_{gd}$ | $Q_{gs2}$    | $Q_{rr}$     | $Q_{oss}$ | $V_{gs(th)}$ |
| 11nC       | 3.7nC    | 1.3nC        | 19nC         | 7.9nC     | 1.9V         |



Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details)①

| SQ | SX | ST |  | MQ | MX | MT | MP |  |  |  |
|----|----|----|--|----|----|----|----|--|--|--|
|----|----|----|--|----|----|----|----|--|--|--|

## Description

The IRF6721SPbF combines the latest HEXFET® Power MOSFET Silicon technology with the advanced DirectFET™ packaging to achieve the lowest on-state resistance in a package that has the footprint of a MICRO-8 and only 0.7 mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques, when application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems, improving previous best thermal resistance by 80%.

The IRF6721SPbF balances both low resistance and low charge along with ultra low package inductance to reduce both conduction and switching losses. The reduced total losses make this product ideal for high efficiency DC-DC converters that power the latest generation of processors operating at higher frequencies. The IRF6721SPbF has been optimized for parameters that are critical in synchronous buck operating from 12 volt bus converters including  $R_{ds(on)}$  and gate charge to minimize losses.

## Absolute Maximum Ratings

|                                | Parameter                                         | Max. | Units |
|--------------------------------|---------------------------------------------------|------|-------|
| $V_{DS}$                       | Drain-to-Source Voltage                           | 30   | V     |
| $V_{GS}$                       | Gate-to-Source Voltage                            | ±20  |       |
| $I_D @ T_A = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10\text{V}$ ③ | 14   | A     |
| $I_D @ T_A = 70^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10\text{V}$ ③ | 11   |       |
| $I_D @ T_C = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10\text{V}$ ④ | 60   |       |
| $I_{DM}$                       | Pulsed Drain Current ⑤                            | 110  |       |
| $E_{AS}$                       | Single Pulse Avalanche Energy ⑥                   | 62   | mJ    |
| $I_{AR}$                       | Avalanche Current ⑤                               | 11   | A     |

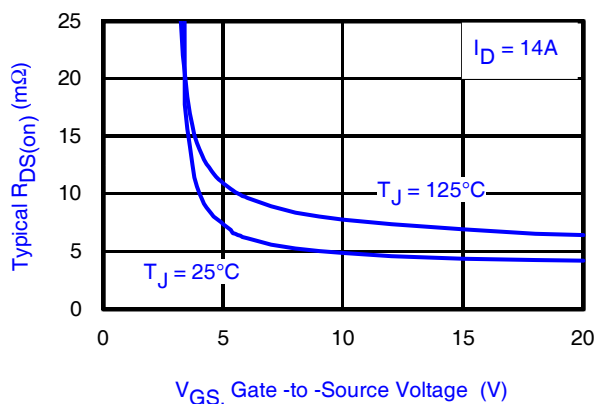


Fig 1. Typical On-Resistance vs. Gate Voltage

Notes:

- ① Click on this section to link to the appropriate technical paper.
- ② Click on this section to link to the DirectFET Website.
- ③ Surface mounted on 1 in. square Cu board, steady state.

www.irf.com

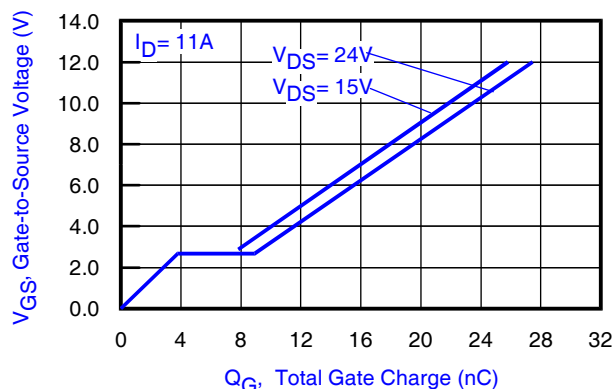


Fig 2. Typical Total Gate Charge vs. Gate-to-Source Voltage


- ④  $T_C$  measured with thermocouple mounted to top (Drain) of part.
- ⑤ Repetitive rating; pulse width limited by max. junction temperature.
- ⑥ Starting  $T_J = 25^\circ\text{C}$ ,  $L = 1.1\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 11\text{A}$ .

## Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

|                                | Parameter                                  | Min. | Typ. | Max. | Units                | Conditions                                                                         |
|--------------------------------|--------------------------------------------|------|------|------|----------------------|------------------------------------------------------------------------------------|
| $BV_{DSS}$                     | Drain-to-Source Breakdown Voltage          | 30   | —    | —    | V                    | $V_{GS} = 0V, I_D = 250\mu A$                                                      |
| $\Delta BV_{DSS}/\Delta T_J$   | Breakdown Voltage Temp. Coefficient        | —    | 22   | —    | mV/ $^\circ\text{C}$ | Reference to $25^\circ\text{C}, I_D = 1\text{mA}$                                  |
| $R_{DS(on)}$                   | Static Drain-to-Source On-Resistance       | —    | 5.1  | 7.3  | m $\Omega$           | $V_{GS} = 10V, I_D = 14A$ ⑦                                                        |
|                                |                                            | —    | 8.5  | 10.9 |                      | $V_{GS} = 4.5V, I_D = 11A$ ⑦                                                       |
| $V_{GS(th)}$                   | Gate Threshold Voltage                     | 1.4  | 1.9  | 2.4  | V                    | $V_{DS} = V_{GS}, I_D = 25\mu A$                                                   |
| $\Delta V_{GS(th)}/\Delta T_J$ | Gate Threshold Voltage Coefficient         | —    | -6.3 | —    | mV/ $^\circ\text{C}$ |                                                                                    |
| $I_{DSS}$                      | Drain-to-Source Leakage Current            | —    | —    | 1.0  | $\mu A$              | $V_{DS} = 24V, V_{GS} = 0V$                                                        |
|                                |                                            | —    | —    | 150  |                      | $V_{DS} = 24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$                               |
| $I_{GSS}$                      | Gate-to-Source Forward Leakage             | —    | —    | 100  | nA                   | $V_{GS} = 20V$                                                                     |
|                                | Gate-to-Source Reverse Leakage             | —    | —    | -100 |                      | $V_{GS} = -20V$                                                                    |
| $g_{fs}$                       | Forward Transconductance                   | 25   | —    | —    | S                    | $V_{DS} = 15V, I_D = 11A$                                                          |
| $Q_g$                          | Total Gate Charge                          | —    | 11   | 17   | nC                   | $V_{DS} = 15V$<br>$V_{GS} = 4.5V$<br>$I_D = 11A$<br>See Fig. 15                    |
| $Q_{gs1}$                      | Pre-V <sub>th</sub> Gate-to-Source Charge  | —    | 2.9  | —    |                      |                                                                                    |
| $Q_{gs2}$                      | Post-V <sub>th</sub> Gate-to-Source Charge | —    | 1.3  | —    |                      |                                                                                    |
| $Q_{gd}$                       | Gate-to-Drain Charge                       | —    | 3.7  | —    |                      |                                                                                    |
| $Q_{godr}$                     | Gate Charge Overdrive                      | —    | 3.1  | —    |                      |                                                                                    |
| $Q_{sw}$                       | Switch Charge ( $Q_{gs2} + Q_{gd}$ )       | —    | 4.9  | —    | nC                   | $V_{DS} = 16V, V_{GS} = 0V$                                                        |
| $Q_{oss}$                      | Output Charge                              | —    | 7.9  | —    |                      |                                                                                    |
| $R_G$                          | Gate Resistance                            | —    | 2.1  | 3.7  | $\Omega$             |                                                                                    |
| $t_{d(on)}$                    | Turn-On Delay Time                         | —    | 7.8  | —    | ns                   | $V_{DD} = 15V, V_{GS} = 4.5V$ ⑦<br>$I_D = 11A$<br>$R_G = 1.8\Omega$<br>See Fig. 17 |
| $t_r$                          | Rise Time                                  | —    | 8.9  | —    |                      |                                                                                    |
| $t_{d(off)}$                   | Turn-Off Delay Time                        | —    | 9.3  | —    |                      |                                                                                    |
| $t_f$                          | Fall Time                                  | —    | 5.3  | —    |                      |                                                                                    |
| $C_{iss}$                      | Input Capacitance                          | —    | 1430 | —    | pF                   | $V_{GS} = 0V$<br>$V_{DS} = 15V$<br>$f = 1.0\text{MHz}$                             |
| $C_{oss}$                      | Output Capacitance                         | —    | 370  | —    |                      |                                                                                    |
| $C_{rss}$                      | Reverse Transfer Capacitance               | —    | 140  | —    |                      |                                                                                    |

## Diode Characteristics

|          | Parameter                                 | Min. | Typ. | Max. | Units | Conditions                                                              |
|----------|-------------------------------------------|------|------|------|-------|-------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —    | —    | 52   | A     | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode) ⑤   | —    | —    | 110  |       |                                                                         |
| $V_{SD}$ | Diode Forward Voltage                     | —    | 0.80 | 1.0  | V     | $T_J = 25^\circ\text{C}, I_S = 11A, V_{GS} = 0V$ ⑦                      |
| $t_{rr}$ | Reverse Recovery Time                     | —    | 17   | 26   | ns    | $T_J = 25^\circ\text{C}, I_F = 11A$                                     |
| $Q_{rr}$ | Reverse Recovery Charge                   | —    | 19   | 29   | nC    | $di/dt = 230A/\mu s$ ⑦                                                  |



### Notes:

⑦ Pulse width  $\leq 400\mu s$ ; duty cycle  $\leq 2\%$ .

### Absolute Maximum Ratings

|                                | Parameter                                           | Max.        | Units            |
|--------------------------------|-----------------------------------------------------|-------------|------------------|
| $P_D @ T_A = 25^\circ\text{C}$ | Power Dissipation ③                                 | 2.2         | W                |
| $P_D @ T_A = 70^\circ\text{C}$ | Power Dissipation ③                                 | 1.4         |                  |
| $P_D @ T_C = 25^\circ\text{C}$ | Power Dissipation ④                                 | 42          |                  |
| $T_P$                          | Peak Soldering Temperature                          | 270         | $^\circ\text{C}$ |
| $T_J$<br>$T_{STG}$             | Operating Junction and<br>Storage Temperature Range | -40 to +150 |                  |

### Thermal Resistance

|                    | Parameter                | Typ.  | Max. | Units              |
|--------------------|--------------------------|-------|------|--------------------|
| $R_{\theta JA}$    | Junction-to-Ambient ③⑩   | —     | 58   | $^\circ\text{C/W}$ |
| $R_{\theta JA}$    | Junction-to-Ambient ⑧⑩   | 12.5  | —    |                    |
| $R_{\theta JA}$    | Junction-to-Ambient ⑨⑩   | 20    | —    |                    |
| $R_{\theta JC}$    | Junction-to-Case ④⑩      | —     | 3.0  |                    |
| $R_{\theta J-PCB}$ | Junction-to-PCB Mounted  | 1.0   | —    | $W/^\circ\text{C}$ |
|                    | Linear Derating Factor ③ | 0.017 | —    |                    |

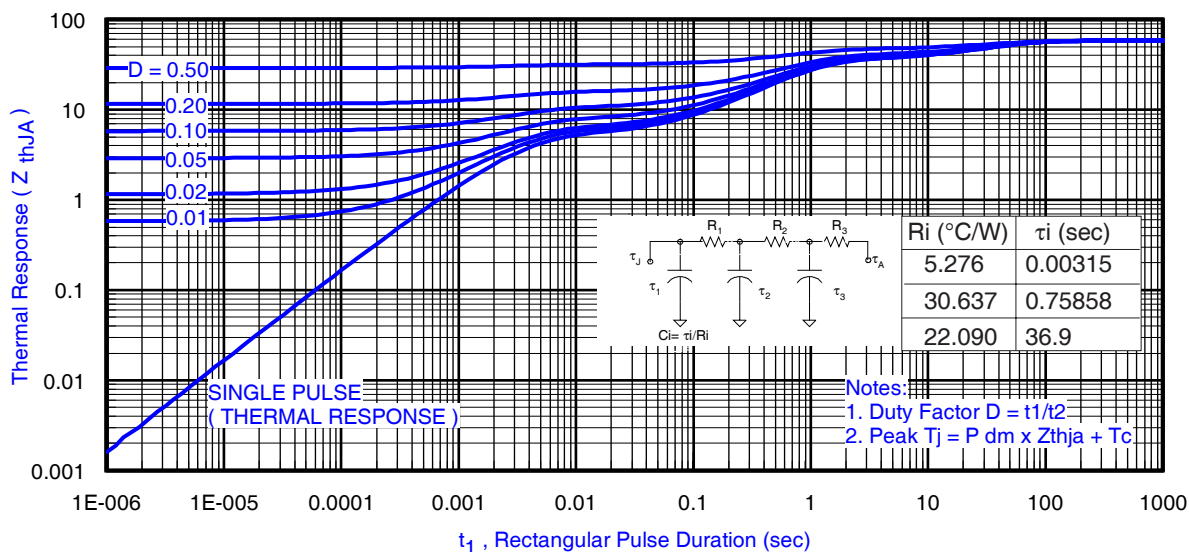


Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient ③

#### Notes:

- ③ Used double sided cooling, mounting pad with large heatsink.  
 ⑧ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.  
 ⑩  $R_{\theta}$  is measured at  $T_J$  of approximately  $90^\circ\text{C}$ .




③ Surface mounted on 1 in. square Cu (still air).




⑧ Mounted to a PCB with small clip heatsink (still air)




⑨ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)

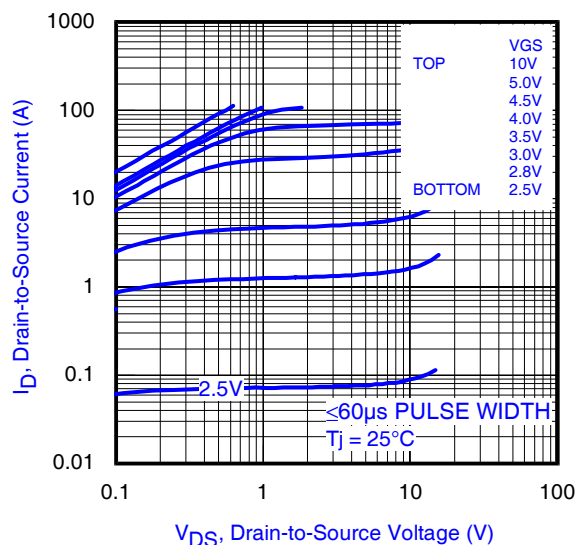


**Fig 4.** Typical Output Characteristics

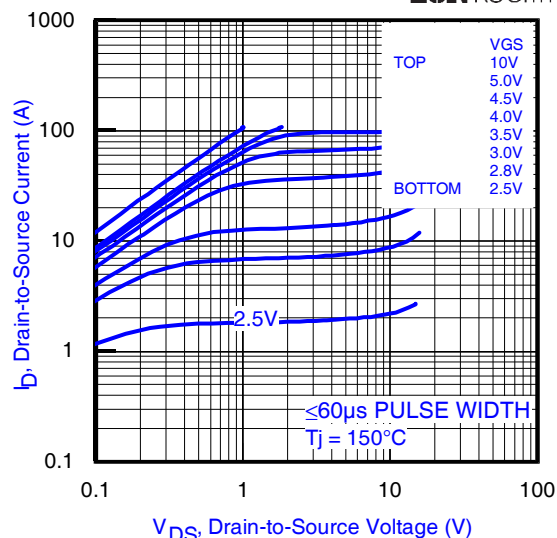


**Fig 5.** Typical Output Characteristics

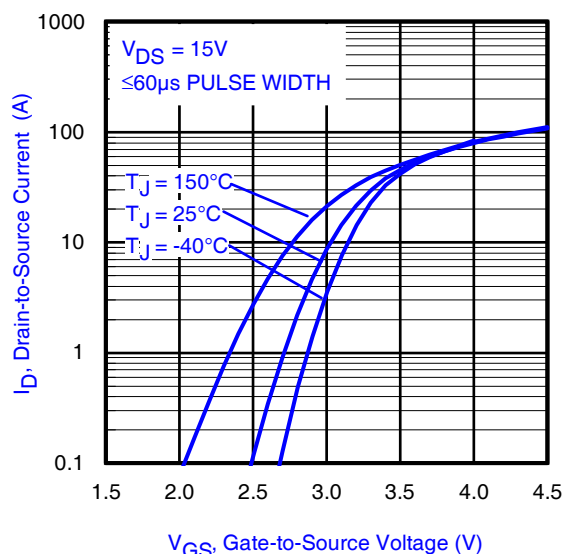


**Fig 6.** Typical Transfer Characteristics

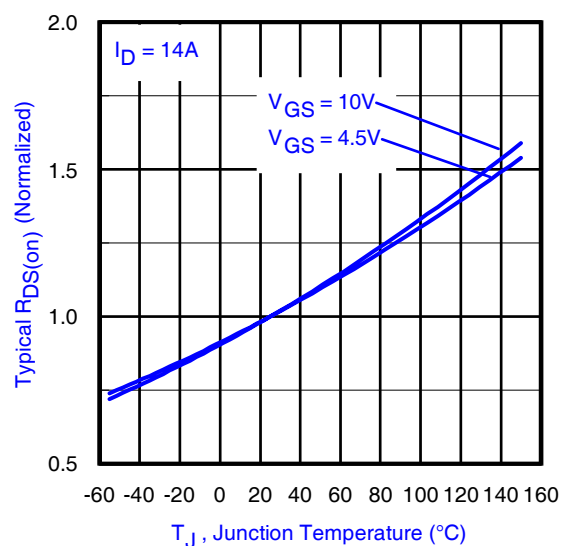


**Fig 7.** Normalized On-Resistance vs. Temperature

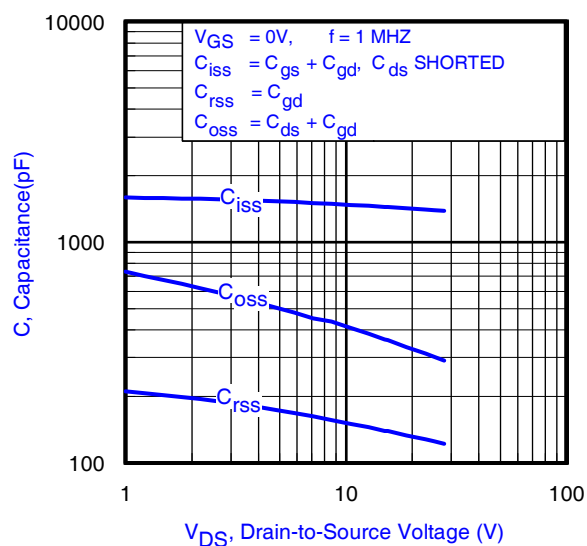


**Fig 8.** Typical Capacitance vs. Drain-to-Source Voltage

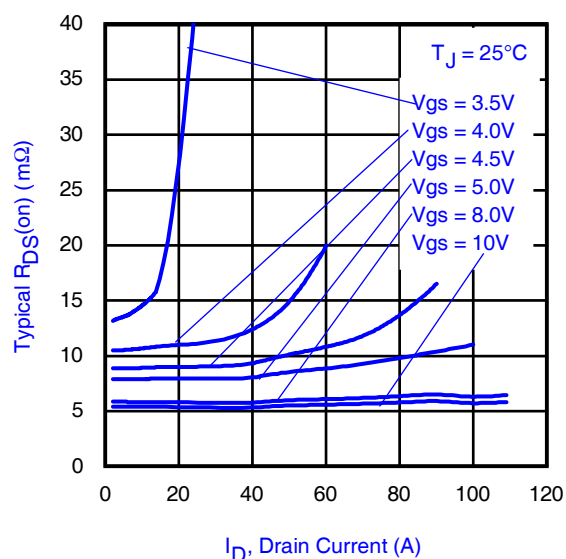


**Fig 9.** Typical On-Resistance vs. Drain Current and Gate Voltage

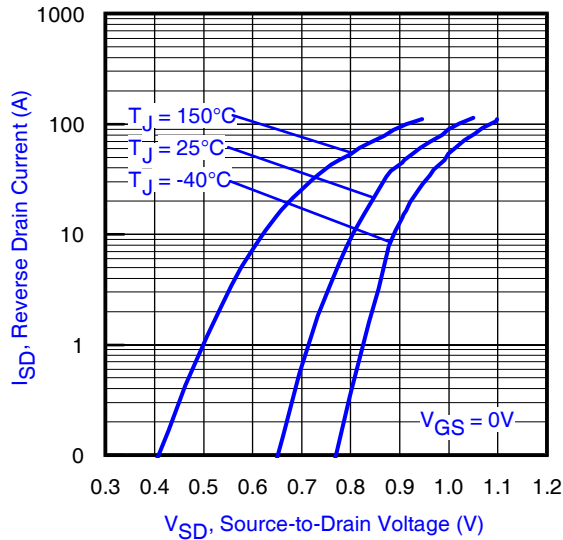


**Fig 10.** Typical Source-Drain Diode Forward Voltage

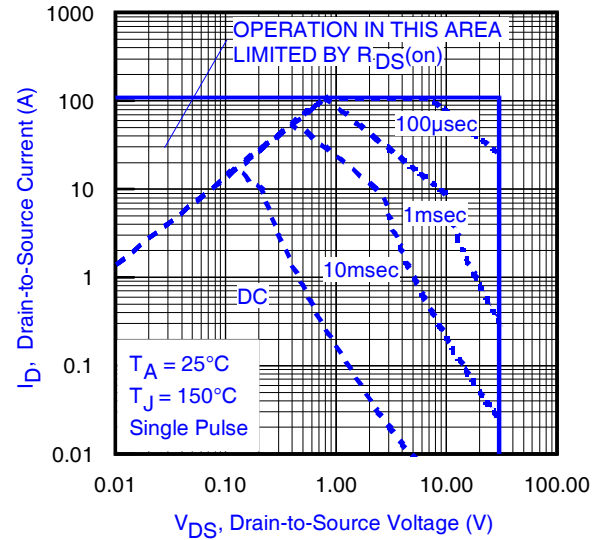


**Fig11.** Maximum Safe Operating Area

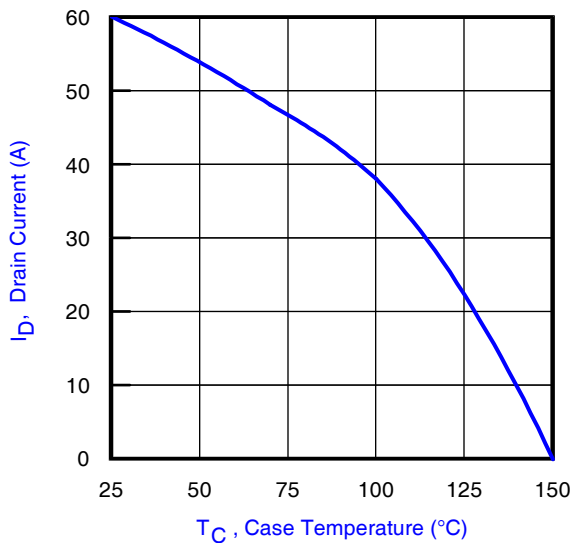


**Fig 12.** Maximum Drain Current vs. Case Temperature

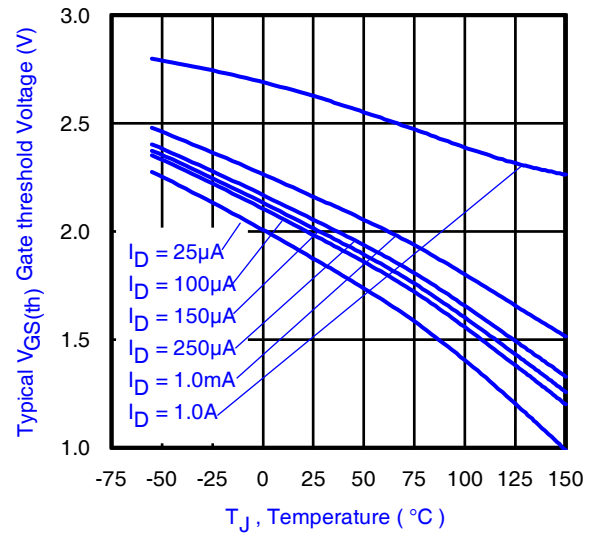


**Fig 13.** Typical Threshold Voltage vs. Junction Temperature

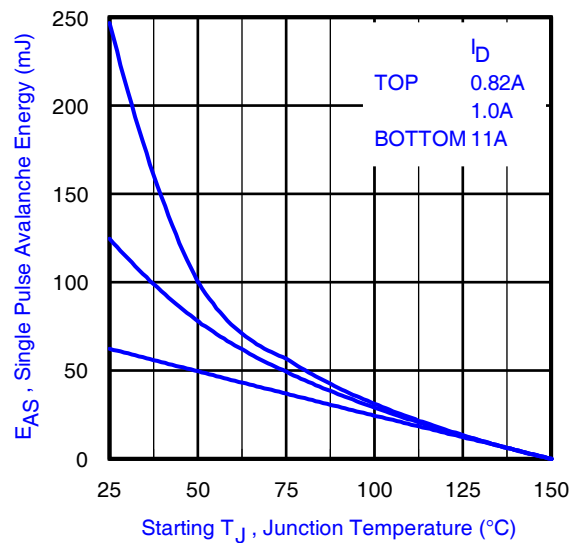


**Fig 14.** Maximum Avalanche Energy vs. Drain Current

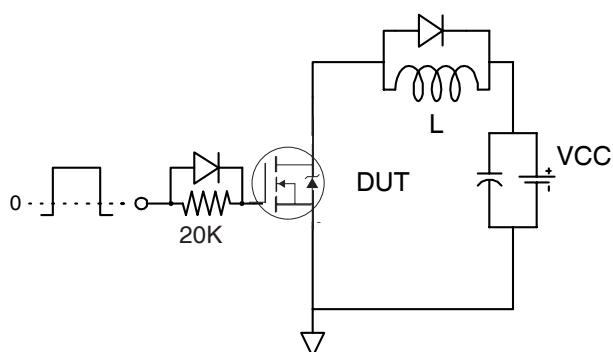


**Fig 15a.** Gate Charge Test Circuit

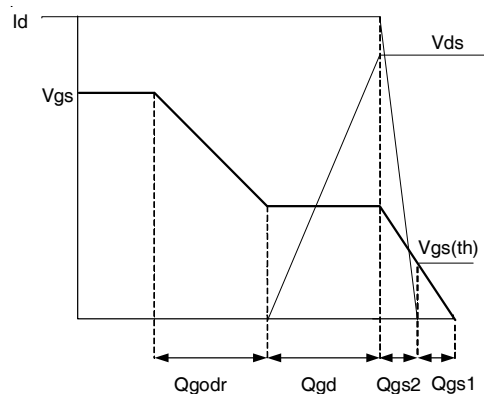


**Fig 15b.** Gate Charge Waveform

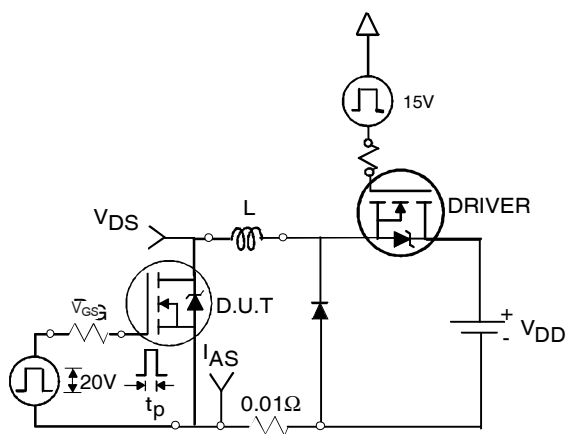


**Fig 16a.** Unclamped Inductive Test Circuit

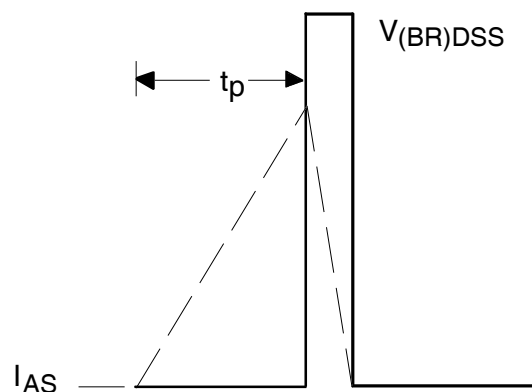


**Fig 16b.** Unclamped Inductive Waveforms

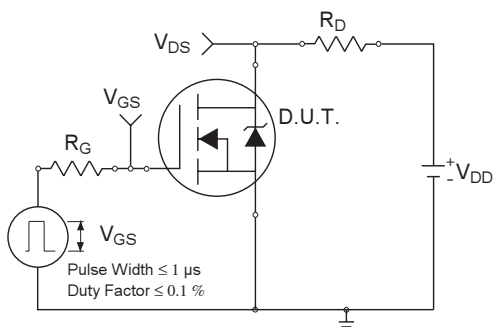

**Fig 17a.** Switching Time Test Circuit

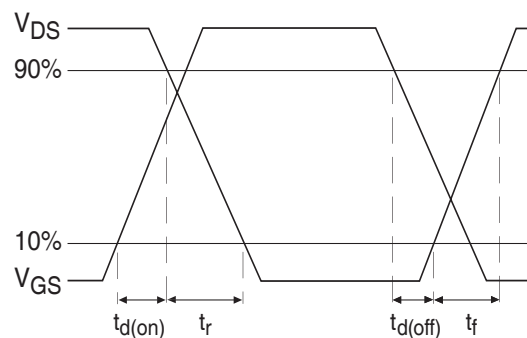

**Fig 17b.** Switching Time Waveforms

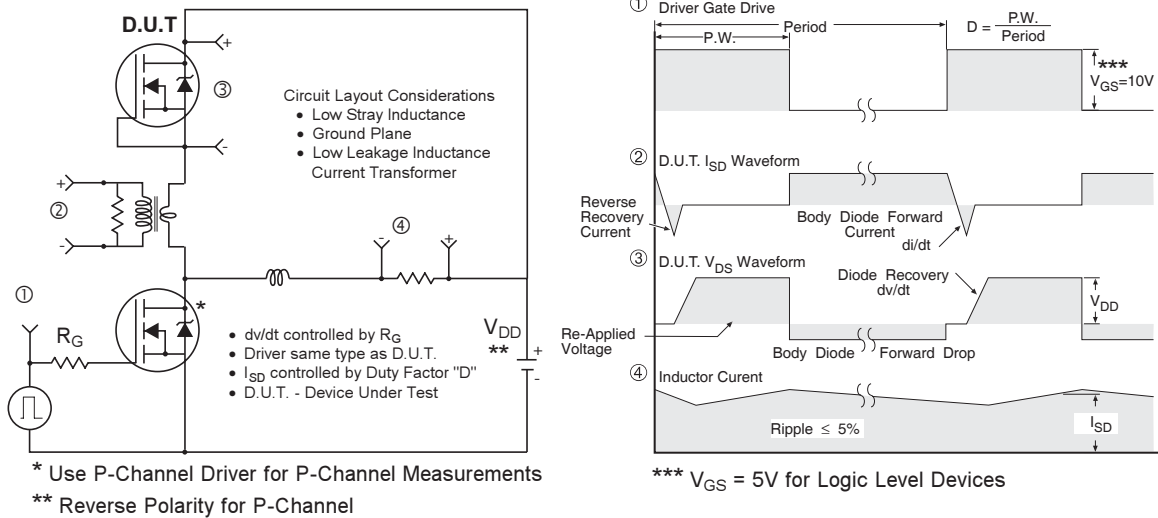


**Fig 18.** Diode Reverse Recovery Test Circuit for HEXFET® Power MOSFETs

## DirectFET™ Board Footprint, SQ Outline (Small Size Can, Q-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.


This includes all recommendations for stencil and substrate designs.

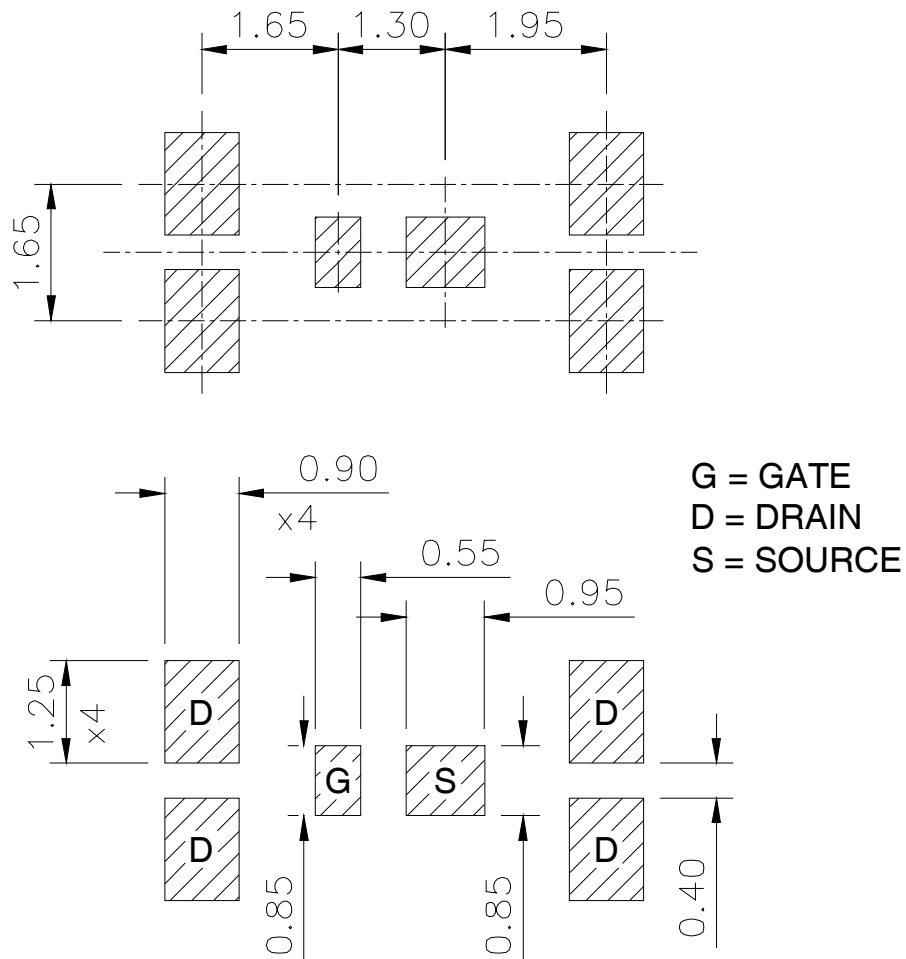


# IRF6721SPbF

## DirectFET™ Outline Dimension, SQ Outline (Small Size Can, Q-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

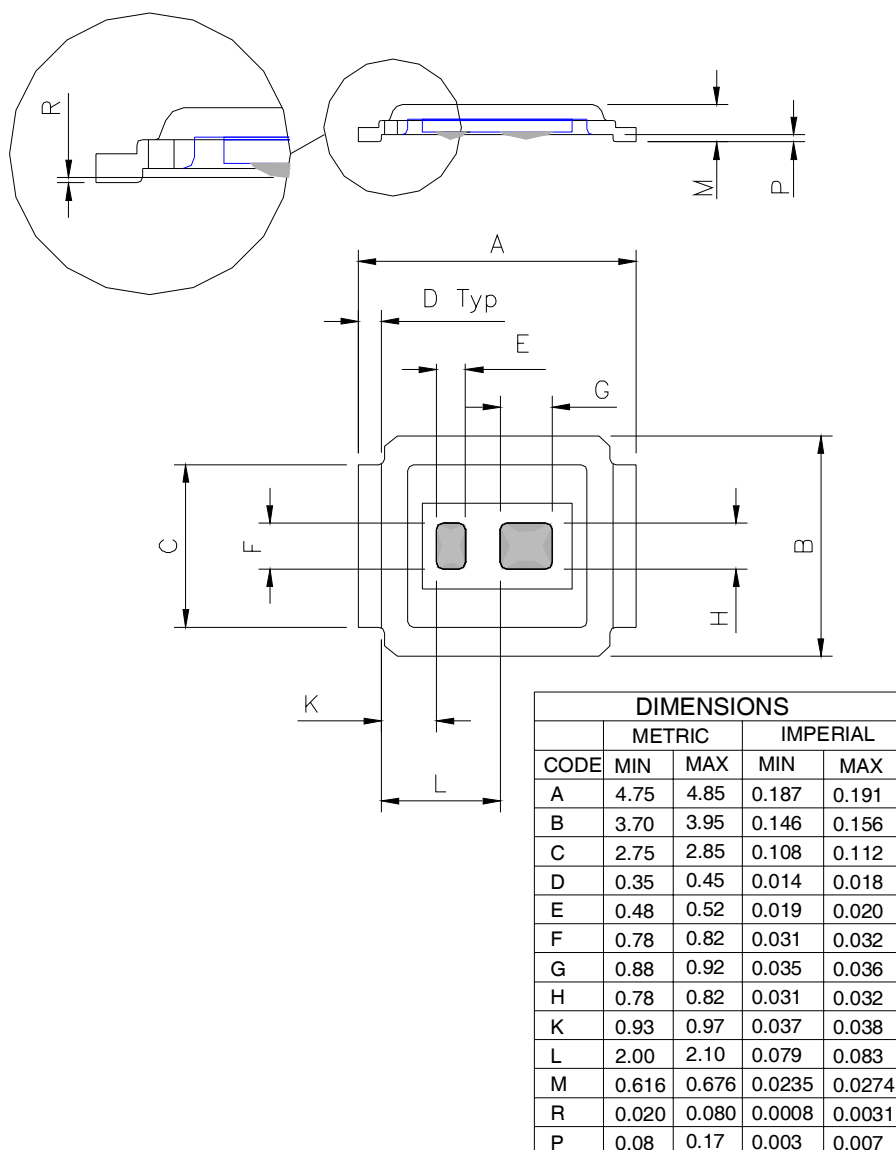

## DirectFET™ Part Marking

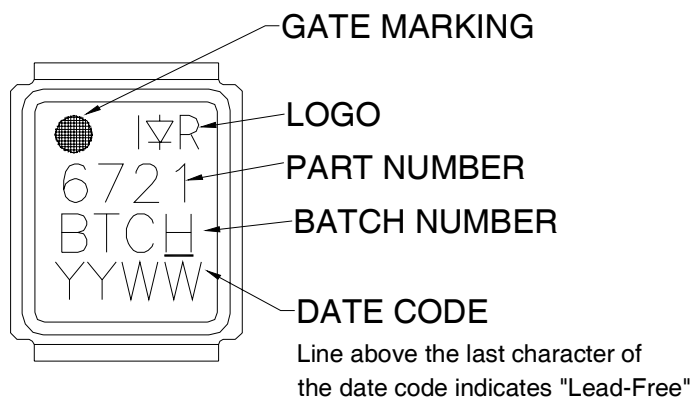


## DirectFET™ Tape & Reel Dimension (Showing component orientation).

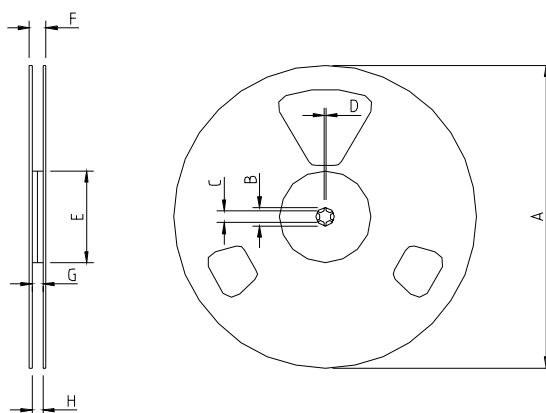

NOTE: Controlling dimensions in mm  
Std reel quantity is 4800 parts. (ordered as IRF6721STRPBF). For 1000 parts on 7" reel, order IRF6721STR1PBF

| REEL DIMENSIONS            |        |      |          |       |                       |       |          |      |
|----------------------------|--------|------|----------|-------|-----------------------|-------|----------|------|
| STANDARD OPTION (QTY 4800) |        |      |          |       | TR1 OPTION (QTY 1000) |       |          |      |
|                            | METRIC |      | IMPERIAL |       | METRIC                |       | IMPERIAL |      |
| CODE                       | MIN    | MAX  | MIN      | MAX   | MIN                   | MAX   | MIN      | MAX  |
| A                          | 330.0  | N.C  | 12.992   | N.C   | 177.77                | N.C   | 6.9      | N.C  |
| B                          | 20.2   | N.C  | 0.795    | N.C   | 19.06                 | N.C   | 0.75     | N.C  |
| C                          | 12.8   | 13.2 | 0.504    | 0.520 | 13.5                  | 12.8  | 0.53     | 0.50 |
| D                          | 1.5    | N.C  | 0.059    | N.C   | 1.5                   | N.C   | 0.059    | N.C  |
| E                          | 100.0  | N.C  | 3.937    | N.C   | 58.72                 | N.C   | 2.31     | N.C  |
| F                          | N.C    | 18.4 | N.C      | 0.724 | N.C                   | 13.50 | N.C      | 0.53 |
| G                          | 12.4   | 14.4 | 0.488    | 0.567 | 11.9                  | 12.01 | 0.47     | N.C  |
| H                          | 11.9   | 15.4 | 0.469    | 0.606 | 11.9                  | 12.01 | 0.47     | N.C  |

LOADED TAPE FEED DIRECTION

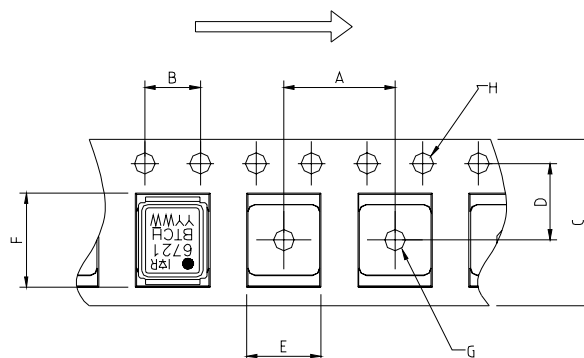

NOTE: CONTROLLING  
DIMENSIONS IN MM

| DIMENSIONS |        |       |          |       |
|------------|--------|-------|----------|-------|
|            | METRIC |       | IMPERIAL |       |
| CODE       | MIN    | MAX   | MIN      | MAX   |
| A          | 7.90   | 8.10  | 0.311    | 0.319 |
| B          | 3.90   | 4.10  | 0.154    | 0.161 |
| C          | 11.90  | 12.30 | 0.469    | 0.484 |
| D          | 5.45   | 5.55  | 0.215    | 0.219 |
| E          | 5.10   | 5.30  | 0.201    | 0.209 |
| F          | 6.50   | 6.70  | 0.256    | 0.264 |
| G          | 1.50   | N.C   | 0.059    | N.C   |
| H          | 1.50   | 1.60  | 0.059    | 0.063 |

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331