

LTM9012

14-Bit, 125Msps Quad ADC with Integrated Drivers

DESCRIPTION

Demonstration circuit DC1732 supports the LTM[®]9012 high speed, quad ADC modules.

The versions of the 1732B demo board are listed in Table 1. Depending on the required resolution and sample rate, the DC1732 is supplied with the appropriate ADC. The circuitry on the analog inputs is optimized for full bandwidth. Refer

to the data sheet for proper input networks for different input frequencies.

Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

Table 1. DC1732 Variants

DC1732 VARIANTS	ADC PART NUMBER	RESOLUTION	MAXIMUM SAMPLE RATE	INPUT RANGE*
1732B-AB	LTM9012-AB	14-BIT	125 Msps	220mV _{P-P}

*With SENSE pin tied to 1.8V.

PERFORMANCE SUMMARY (T_A = 25°C)

PARAMETER	CONDITION	VALUE
Supply Voltages – DC1732B	Depending on Sampling Rate, This Supply Must Provide Up to 700mA.	3V to 6V, 5V to 6V
Analog Input Range	Depending on SENSE Pin Voltage	110mV _{P-P} to 220mV _{P-P}
Logic Input Voltages	Minimum Logic High	1.3V
	Maximum Logic Low	0.6V
Logic Output Voltages (Differential)	Nominal Logic Levels (100Ω Load, 3.5mA Mode)	350mV/1.25V Common Mode
	Minimum Logic Levels (100Ω Load, 3.5mA Mode)	247mV/1.25V Common Mode
Sampling Frequency (Convert Clock Frequency)	See Table 1	
Encode Clock Level	Single-Ended Encode Mode (ENC ⁻ Tied to GND)	0V to 3.6V
Encode Clock Level	Differential Encode Mode (ENC ⁻ not Tied to GND)	0.2V to 3.6V
Resolution	See Table 1	
Input Frequency Range	See Table 1	
SFDR	See Applicable Data Sheet	
SNR	See Applicable Data Sheet	

QUICK START PROCEDURE

Demonstration circuit 1732 is easy to set up to evaluate the performance of the LTM9012 modules. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below. Figure 2 shows the pinout of the analog input header.

Setup

If a DC1371 data acquisition and collection system was supplied with the DC1732 demonstration circuit, follow the DC1371 quick start guide to install the required software and for connecting the DC1371 to the DC1732 and to a PC.

DC1732 Demonstration Circuit Board Jumpers

The DC1732 demonstration circuit board should have the following jumper settings as default positions. (as per Figure 1)

J2: PAR/SER: Selects parallel or serial programming mode. (default – serial)

Optional Jumpers

J1: Term: Enables/disable optional output termination. (default – removed)

J5: ILVDS: Selects either 1.75mA or 3.5mA of output current for the LVDS drivers. (default – removed)

J3: LANE: Selects either 1-lane or 2-lane output modes (default – removed) NOTE: The DC1371 does not support 1-lane operation.

J4: SHDN: Enables and disables the LTM9012. (default – removed)

J10: WP: Enable/disables write protect for the EEPROM. (default – removed)

Note: optional jumper should be left open to ensure proper serial configuration.

Applying Power and Signals to the DC1732 Demonstration Circuit

The DC1371 is used to acquire data from the DC1732. The DC1371 must FIRST be connected to a powered USB port and have 5V applied power BEFORE applying DC power to the DC1732. DC1732 requires 3V to 6V at TP1 and 5V to 6V at TP4 for proper operation.

The DC1732 demonstration circuit requires up to 700mA depending on the sampling rate and the A/D converter supplied.

The DC1732 should not be removed, or connected to the DC1371 while power is applied.

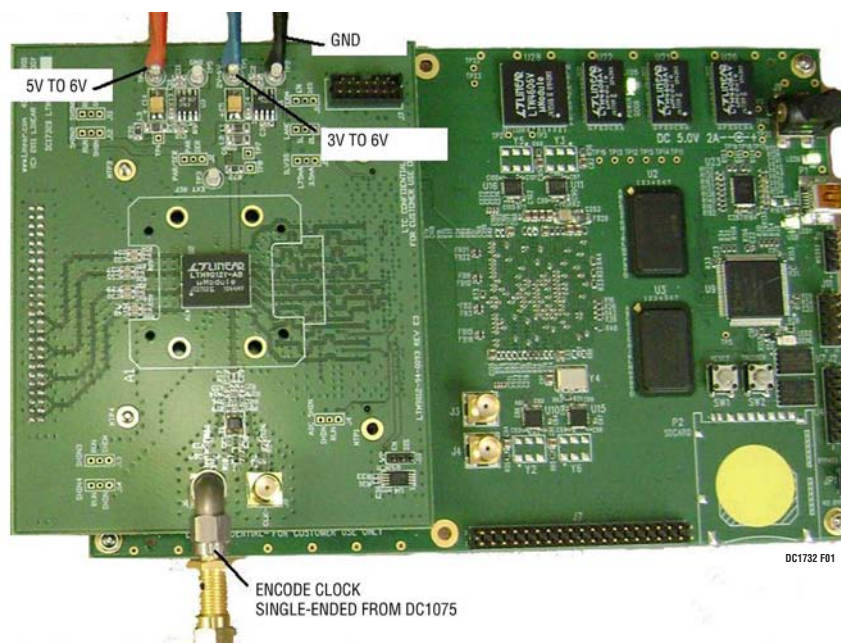


Figure 1. DC1732 Setup

QUICK START PROCEDURE

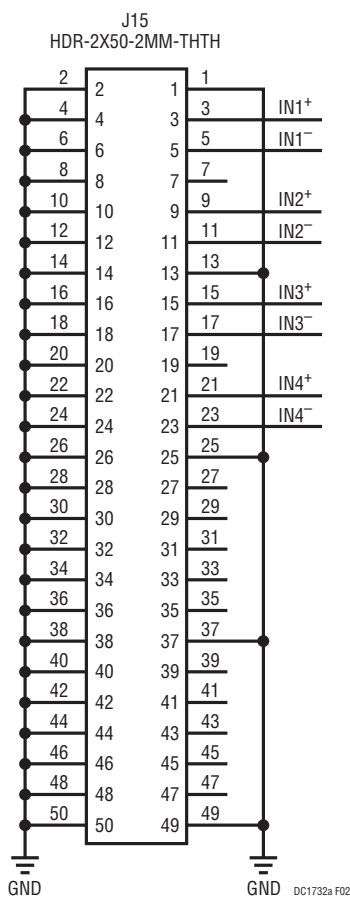


Figure 2. Pinout for Analog Input Header (J15)

Analog Input Network

For optimal distortion and noise performance the RC network on the analog inputs may need to be optimized for different analog input frequencies. For full bandwidth operation, no series RC elements should be used.

In almost all cases, filters will be required on both analog input and encode clock to provide data sheet SNR.

The filters should be located close to the inputs to avoid reflections from impedance discontinuities at the driven end of a long transmission line. Most filters do not present 50Ω outside the passband. In some cases, 3dB to 10dB pads may be required to obtain low distortion.

If your generator cannot deliver full-scale signals without distortion, you may benefit from a medium power amplifier based on a gallium arsenide gain block prior to the final

filter. This is particularly true at higher frequencies where IC based operational amplifiers may be unable to deliver the combination of low noise figure and high IP3 point required. A high order filter can be used prior to this final amplifier, and a relatively lower Q filter used between the amplifier and the demo circuit.

Apply the analog input signal of interest to the header on the DC1732 demonstration circuit board marked “J15”. There is access to the eight analog inputs. For a pin out of this header see Figure 2 in this quick start guide, or the attached schematic.

Encode Clock

NOTE: Apply an encode clock to the SMA connector on the DC1732 demonstration circuit board marked “J11 CLK+”. As a default the DC1732 is populated to have a single-ended input.

For the best noise performance, the ENCODE INPUT must be driven with a very low jitter, square wave source. The amplitude should be large, up to 3V_{P-P} or 13dBm. When using a sinusoidal signal generator a squaring circuit can be used. Linear Technology also provides demo board DC1075A that divides a high frequency sine wave by four, producing a low jitter square wave for best results with the LTM9012.

Using bandpass filters on the clock and the analog input will improve the noise performance by reducing the wideband noise power of the signals. In the case of the DC1732 a bandpass filter used for the clock should be used prior to the DC1075A. Data sheet FFT plots are taken with 10 pole LC filters made by TTE (Los Angeles, CA) to suppress signal generator harmonics, non harmonically related spurs and broadband noise. Low phase noise Agilent 8644B generators are used for both the clock input and the analog input.

Digital Outputs

Data outputs, data clock, and frame clock signals are available on J9 of the DC1732. This connector follows the VITA-57/FMC standard, but all signals should be verified when using an FMC carrier card other than the DC1371.

QUICK START PROCEDURE

Software

The DC1371 is controlled by the PScope system software provided or downloaded from the Linear Technology website at <http://www.linear.com/software/>.

To start the data collection software if “PScope.exe”, is installed (by default) in \Program Files\LTC\PScope\, double click the PScope icon or bring up the run window under the start menu and browse to the PScope directory and select PScope.

If the DC1732 demonstration circuit is properly connected to the DC1371, PSCOPE should automatically detect the DC1732, and configure itself accordingly.

If everything is hooked up properly, powered and a suitable convert clock is present, clicking the “Collect” button should result in time and frequency plots displayed in the PScope window. Additional information and help for PScope is available in the DC1371 quick start guide and in the online help available within the PScope program itself.

Serial Programming

PScope has the ability to program the DC1732 board serially through the DC1371. There are several options available in the LTM9012 family that are only available through serially programming. PScope allows all of these features to be tested.

These options are available by first clicking on the “Set Demo Bd Options” icon on the PScope toolbar (Figure 3).

This will bring up the menu shown in Figure 4.

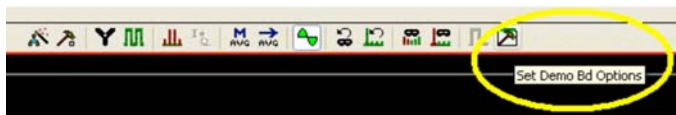


Figure 3. PScope Toolbar

This menu allows any of the options available for the LTM9012 family to be programmed serially. The LTM9012 family has the following options:

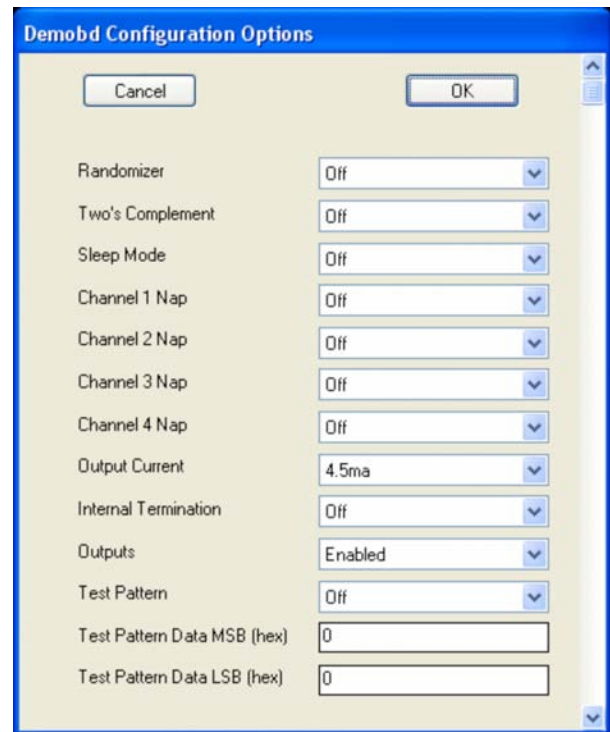


Figure 4. Demobd Configuration Options.

Randomizer: Enables data output randomizer

Off (default): Disables data output randomizer

On: Enables data output randomizer

Two's Complement: Enables two's complement mode

Off (default): Selects offset binary mode

On: Selects two's complement mode

Sleep Mode: Selects between normal operation, sleep mode:

Off (default): Entire ADC is powered, and active

On: The entire ADC is powered down.

Channel 1 Nap: Selects between normal operation and putting channel 1 in nap mode.

Off (default): Channel 1 is active

On: Channel 1 is in nap mode

QUICK START PROCEDURE

Channel 2 Nap: Selects between normal operation and putting channel 2 in nap mode.

Off (default): Channel 2 is active

On: Channel 2 is in nap mode

Channel 3 Nap: Selects between normal operation and putting channel 3 in nap mode.

Off (default): Channel 3 is active

On: Channel 3 is in nap mode

Channel 4 Nap: Selects between normal operation and putting channel 4 in nap mode.

Off (default): Channel 4 is active

On: Channel 4 is in nap mode

Output Current: Selects the LVDS output drive current

1.75mA (default): LVDS output driver current

2.1mA: LVDS output driver current

2.5mA: LVDS output driver current

3.0mA: LVDS output driver current

3.5mA: LVDS output driver current

4.0mA: LVDS output driver current

4.5mA: LVDS output driver current

Internal Termination: Enables LVDS internal termination

Off (default): Disables internal termination

On: Enables internal termination

Outputs: Enables digital outputs

Enabled (default): Enables digital outputs

Disabled: Disables digital outputs

Test Pattern: Selects digital output test patterns. The desired test pattern can be entered into the text boxes provided.

Off (default): ADC input data is displayed

On: Test pattern is displayed

Once the desired settings are selected hit OK and PScope will automatically update the register of the device on the DC1732 demo board.

DEMO MANUAL DC1732

PARTS LIST


ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	T1	BALUN, 1:1, SMT, SM-22	MACOM MABA-007159-000000
2	6	C2, C3, C4, C11, C12, C13	CAP, X5R, 1 μ F, 10V, 10%, 0603	AVX 0603ZD105KAT
3	1	C7	CAP, X5R, 2.2 μ F, 10V, 10%, 0603	AVX 0603ZD225KAT
4	2	C5, C14	CAP, TANT, 100 μ F, 10V, 10%, C 6032	VISHAY 293D107X9010C2TE3
5	8	C33, C34, C35, C37 to C41	CAP, X7R, 0.01 μ F, 16V, 10%, 0603	AVX 0603YC103KAT
6	3	C21, C30, C31	CAP, X7R, 0.01 μ F, 16V, 10%, 0402	AVX 0402YC103KAT
7	1	C8	CAP, X5R, 1 μ F, 10V, 10%, 0402	AVX 0402ZD105KAT
8	8	C6, C9, C23 to C27, C36	CAP, X5R, 0.1 μ F, 10V, 10%, 0402	AVX 0402ZD104KAT
9	2	C1, C10	CAP, X5R, 4.7 μ F, 10V, 10%, 0603	AVX 0603ZD475KAT
10	0	C20, C28, C32	CAP, DNI, 0402	OPT
11	0	D1	DIODE, DNI, SOT-23	OPT
12	1	J9	CONNECTOR, FMC MEZZAININE	SAMTEC ASP-134606-01
13	2	J6, J8	CONN, SMA 50 Ω PC MOUNT, FEMALE	AMPHENOL 132134
14	10	J1 to J5, J10, J11, J12, J13, J14	HEADER, 3 \times 1, 2mm	SAMTEC TMM-103-02-L-S
15	1	J15	HEADER, 2 \times 25, 2mm	SAMTEC SQT-125-01-F-D
16	1	J7	HEADER, 2 \times 7, 2mm	MOLEX 87831-1421
17	0	L4	IND, DNI, 0603	OPT
18	1	R69	RES, 0 Ω JUMPER, 0603	VISHAY CRCW06030000Z0ED
19	3	R70, R71, R72	RES, 0 Ω JUMPER, 0805	VISHAY CRCW08050000Z0ED
20	3	L1, L2, L3	IND, BEAD, 1206	MURATA BL31PG330SN1L
21	11	R2, R4, R5, R6, R9, R10, R11, R61 to R64	RES, 1k, 1%, 1/16W, 0402	PANASONIC ERJ-2RKF1001X
22	1	R3	RES, 31.6k, 1%, 1/16W, 0402	PANASONIC ERJ-2RKF3162X
23	8	R39 to R46	RES, 33k, 1%, 1/16, 0402	PANASONIC ERJ-2RKF3302X
24	1	R7	RES, 1.74k, 1%, 1/16W, 0402	PANASONIC ERJ-2RKF1741X
25	4	R65, R66, R67, R68	RES, 33.0, 1%, 1/16W, 0402	PANASONIC ERJ-2RKF33R0X
26	4	R1, R31, R32, R33	RES, 10k, 1%, 1/16, 0402	PANASONIC ERJ-2RKF1002X
27	0	R12 to R15, R17, R21, R23 to R26, R48 to R56, R60	RES, DNI, 0402	OPT
28	14	C22, C29, R16, R18, R22, R29, R34, R36, R37, R38, R47, R57, R58, R59	RES, 0 Ω JUMPER, 0402	VISHAY CRCW04020000Z0ED
29	2	R19, R20	RES, 49.9, 1%, 1/16, 0402	PANASONIC ERJ-2RKF49R9X
30	5	R8, R27, R28, R30, R35	RES, 100, 1%, 1/16, 0402	PANASONIC ERJ-2RKF1000X
31	5	TP1, TP2, TP3, TP4, TP5	TURRET, 0.093	MILL MAX 2501-2-00-80-00-00-07-0
32	1	U1	IC, VREG, 1.8V, 500MA, S08	LINEAR TECHNOLOGY LT1763CS8-1.8

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
33	1	U2	MODULE, LTM9012	LINEAR TECHNOLOGY LTM9012-AB
34	1	U4	IC, SERIAL_EEPROM, TSSOP8	MICROCHIP 24LC32-IST
35	1	U3	IC, VREG, ADJ, 500MA, SO8	LINEAR TECHNOLOGY LT1763CS8
36	1		STENCIL SET	STENCIL DC1732B
37	1		FAB, PCB, DC1732B	DEMO CIRCUIT DC1732B


DEMO MANUAL DC1732

SCHEMATIC DIAGRAM

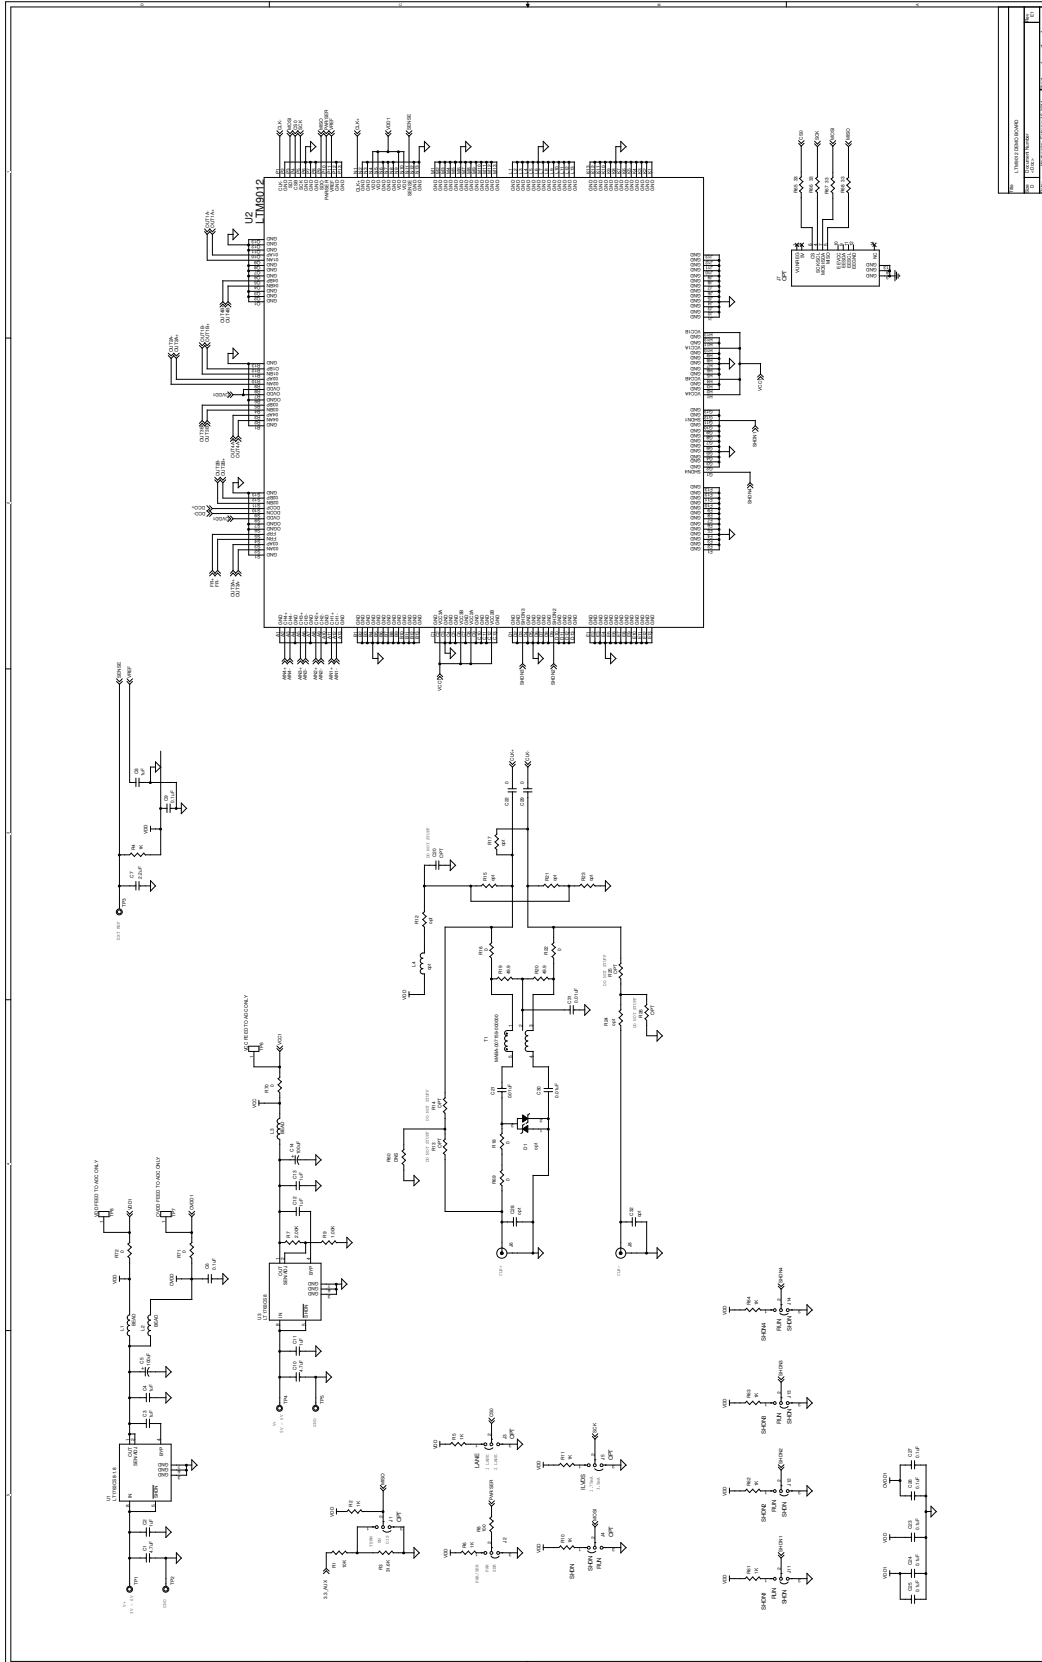

REV	DATE	DESCRIPTION
1.0	11/11/03	Initial Release
1.1	01/14/04	Added Pin 10 to Header
1.2	03/15/04	Added Pin 11 to Header
1.3	05/18/04	Added Pin 12 to Header
1.4	07/21/04	Added Pin 13 to Header
1.5	09/23/04	Added Pin 14 to Header
1.6	11/25/04	Added Pin 15 to Header
1.7	01/27/05	Added Pin 16 to Header
1.8	03/29/05	Added Pin 17 to Header
1.9	05/31/05	Added Pin 18 to Header
1.10	08/02/05	Added Pin 19 to Header
1.11	10/04/05	Added Pin 20 to Header
1.12	12/06/05	Added Pin 21 to Header
1.13	02/08/06	Added Pin 22 to Header
1.14	04/10/06	Added Pin 23 to Header
1.15	06/12/06	Added Pin 24 to Header
1.16	08/14/06	Added Pin 25 to Header
1.17	10/16/06	Added Pin 26 to Header
1.18	12/18/06	Added Pin 27 to Header
1.19	02/20/07	Added Pin 28 to Header
1.20	04/22/07	Added Pin 29 to Header
1.21	06/24/07	Added Pin 30 to Header
1.22	08/26/07	Added Pin 31 to Header
1.23	10/28/07	Added Pin 32 to Header
1.24	12/30/07	Added Pin 33 to Header
1.25	03/02/08	Added Pin 34 to Header
1.26	05/04/08	Added Pin 35 to Header
1.27	07/06/08	Added Pin 36 to Header
1.28	09/08/08	Added Pin 37 to Header
1.29	11/10/08	Added Pin 38 to Header
1.30	01/12/09	Added Pin 39 to Header
1.31	03/14/09	Added Pin 40 to Header
1.32	05/16/09	Added Pin 41 to Header
1.33	07/18/09	Added Pin 42 to Header
1.34	09/20/09	Added Pin 43 to Header
1.35	11/22/09	Added Pin 44 to Header
1.36	01/24/10	Added Pin 45 to Header
1.37	03/26/10	Added Pin 46 to Header
1.38	05/28/10	Added Pin 47 to Header
1.39	07/30/10	Added Pin 48 to Header
1.40	10/02/10	Added Pin 49 to Header
1.41	12/04/10	Added Pin 50 to Header
1.42	02/06/11	Added Pin 51 to Header
1.43	04/08/11	Added Pin 52 to Header
1.44	06/10/11	Added Pin 53 to Header
1.45	08/12/11	Added Pin 54 to Header
1.46	10/14/11	Added Pin 55 to Header
1.47	12/16/11	Added Pin 56 to Header
1.48	02/18/12	Added Pin 57 to Header
1.49	04/20/12	Added Pin 58 to Header
1.50	06/22/12	Added Pin 59 to Header
1.51	08/24/12	Added Pin 60 to Header
1.52	10/26/12	Added Pin 61 to Header
1.53	12/28/12	Added Pin 62 to Header
1.54	03/01/13	Added Pin 63 to Header
1.55	05/03/13	Added Pin 64 to Header
1.56	07/05/13	Added Pin 65 to Header
1.57	09/07/13	Added Pin 66 to Header
1.58	11/09/13	Added Pin 67 to Header
1.59	01/11/14	Added Pin 68 to Header
1.60	03/13/14	Added Pin 69 to Header
1.61	05/15/14	Added Pin 70 to Header
1.62	07/17/14	Added Pin 71 to Header
1.63	09/19/14	Added Pin 72 to Header
1.64	11/21/14	Added Pin 73 to Header
1.65	01/23/15	Added Pin 74 to Header
1.66	03/25/15	Added Pin 75 to Header
1.67	05/27/15	Added Pin 76 to Header
1.68	07/29/15	Added Pin 77 to Header
1.69	10/01/15	Added Pin 78 to Header
1.70	12/03/15	Added Pin 79 to Header
1.71	02/05/16	Added Pin 80 to Header
1.72	04/07/16	Added Pin 81 to Header
1.73	06/09/16	Added Pin 82 to Header
1.74	08/11/16	Added Pin 83 to Header
1.75	10/13/16	Added Pin 84 to Header
1.76	12/15/16	Added Pin 85 to Header
1.77	02/17/17	Added Pin 86 to Header
1.78	04/19/17	Added Pin 87 to Header
1.79	06/21/17	Added Pin 88 to Header
1.80	08/23/17	Added Pin 89 to Header
1.81	10/25/17	Added Pin 90 to Header
1.82	12/27/17	Added Pin 91 to Header
1.83	03/01/18	Added Pin 92 to Header
1.84	05/03/18	Added Pin 93 to Header
1.85	07/05/18	Added Pin 94 to Header
1.86	09/07/18	Added Pin 95 to Header
1.87	11/09/18	Added Pin 96 to Header
1.88	01/11/19	Added Pin 97 to Header
1.89	03/13/19	Added Pin 98 to Header
1.90	05/15/19	Added Pin 99 to Header
1.91	07/17/19	Added Pin 100 to Header
1.92	09/19/19	Added Pin 101 to Header
1.93	11/21/19	Added Pin 102 to Header
1.94	01/23/20	Added Pin 103 to Header
1.95	03/25/20	Added Pin 104 to Header
1.96	05/27/20	Added Pin 105 to Header
1.97	07/29/20	Added Pin 106 to Header
1.98	10/01/20	Added Pin 107 to Header
1.99	12/03/20	Added Pin 108 to Header
1.100	02/05/21	Added Pin 109 to Header

SCHEMATIC DIAGRAM

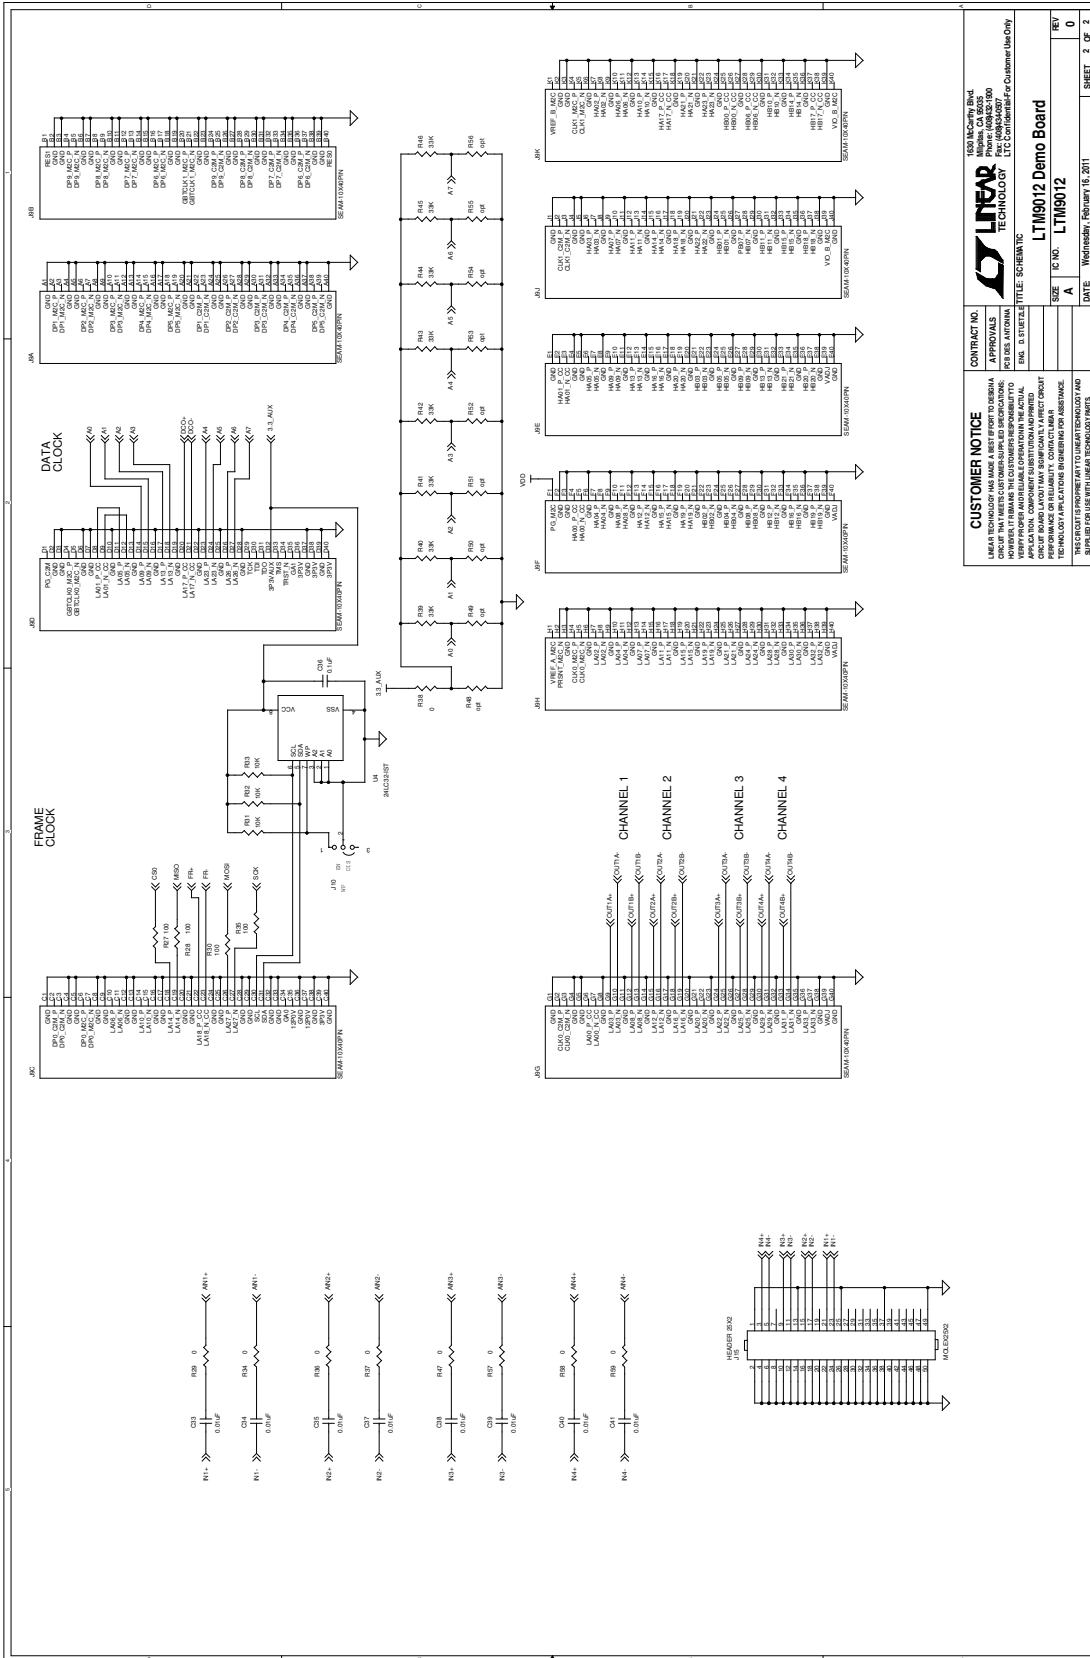

CUSTOMER NOTICE		CONTRACT NO.	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN AND MANUFACTURE THIS BOARD TO MEET THE CUSTOMER'S REQUIREMENTS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER OPERATION IN THEIR APPLICATION. LINEAR TECHNOLOGY ASSUMES NO LIABILITY FOR DAMAGE TO CUSTOMER EQUIPMENT OR PERSONAL INJURY ARISING FROM THE USE OF THIS BOARD.		APPROVALS FOR DES. APPROVAL	
THIS CIRCUIT SHOULD BE USED AS A REFERENCE ONLY. IT IS NOT INTENDED FOR PRODUCTION. IT IS NOT TO BE USED IN ANY PRODUCT OR SYSTEM.		TITLE: SCHEMATIC	
THIS CIRCUIT SHOULD BE USED AS A REFERENCE ONLY. IT IS NOT INTENDED FOR PRODUCTION. IT IS NOT TO BE USED IN ANY PRODUCT OR SYSTEM.		DATE: Wednesday, February 15, 2011	
THIS CIRCUIT SHOULD BE USED AS A REFERENCE ONLY. IT IS NOT INTENDED FOR PRODUCTION. IT IS NOT TO BE USED IN ANY PRODUCT OR SYSTEM.		SIZE: A	
THIS CIRCUIT SHOULD BE USED AS A REFERENCE ONLY. IT IS NOT INTENDED FOR PRODUCTION. IT IS NOT TO BE USED IN ANY PRODUCT OR SYSTEM.		IC NO.: LT19012	
THIS CIRCUIT SHOULD BE USED AS A REFERENCE ONLY. IT IS NOT INTENDED FOR PRODUCTION. IT IS NOT TO BE USED IN ANY PRODUCT OR SYSTEM.		SHEET: 2 OF 2	
THIS CIRCUIT SHOULD BE USED AS A REFERENCE ONLY. IT IS NOT INTENDED FOR PRODUCTION. IT IS NOT TO BE USED IN ANY PRODUCT OR SYSTEM.		REV: 0	

LINEAR TECHNOLOGY, INC. 100 N. RAVENHILL BLVD. MILPITAS, CA 95035 PHONE: (408) 255-1000 FAX: (408) 255-6000 WWW.LINEARTECH.COM © 2011 LINEAR TECHNOLOGY, INC. ALL RIGHTS RESERVED.		CONTRACT NO. _____ APPROVALS _____ FOR DES. APPROVAL TITLE: SCHEMATIC DATE: Wednesday, February 15, 2011 SIZE: A IC NO.: LT19012 SHEET: 2 OF 2 REV: 0	
--	--	---	--

DEMO MANUAL DC1732

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc1732f



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331