

| Part Number | Description                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------|
| ZD20CF*     | 2A, 60 Vdc, short-circuit protected up to 33 Vdc, solid-state relay for through-hole mounting |
| SZD20CF*    | 2A, 60 Vdc, short-circuit protected up to 33 Vdc, solid-state relay for surface mount         |

\*W for +25°C ambient; T for over-temperature screen

### ELECTRICAL SPECIFICATIONS


(–55°C to +105°C ambient temperature unless otherwise specified)

#### INPUT (CONTROL) SPECIFICATIONS

|                       | Min | Max | Units |
|-----------------------|-----|-----|-------|
| Input Current         | 8   | 20  | mA    |
| Input Voltage @ 10mA  | 2   | 3   | Vdc   |
| Must Turn-On          | 8   |     | mA    |
| Must Turn-Off Current |     | 100 | μA    |
| Must Turn-Off Voltage |     | 0.8 | Vdc   |
| Reverse Polarity      | –6  |     | Vdc   |

#### OUTPUT (LOAD) SPECIFICATIONS

|                                      | Min | Max  | Units |
|--------------------------------------|-----|------|-------|
| Load Voltage Range                   | 0   | 60   | Vdc   |
| Output Current Rating (See Figure 5) |     | 2.0  | A     |
| Leakage Current at Rated Voltage     |     | 10   | μA    |
| Transient Blocking Voltage @ 25°C    |     | 100  | Vdc   |
| Output Capacitance @ 25Vdc (25°C)    |     | 600  | pF    |
| Output Voltage Drop @ 2A             |     | 0.30 | Vdc   |
| On Resistance                        |     | 0.15 | Ohm   |
| Turn-On Time                         |     | 3.0  | ms    |
| Turn-Off Time                        |     | 1.0  | ms    |
| Trip Overload (See Figure 6)         |     |      | A     |
| Short Circuit Protection             |     | 33   | Vdc   |
| Operating Frequency                  |     | 10   | Hz    |



### FEATURES/BENEFITS

- Short-circuit protected
- Overload protected
- 2 Amp load
- Low off-state leakage
- Optical isolation
- Compact 6-pin package

### DESCRIPTION

ZD20CF Series Relays have optical isolation between relay input and output. Loads may be connected to either the positive or negative output terminals. ZD20CF Relays act as electronic circuit breakers that sense shorted loads or other overload events and then trip-off. Relay contacts open and no current flows through the relay and associated loads. These relays prevent overcurrent damage to the system. Cycling the relay on-off removes the tripped or latched-off condition and returns the relay to the normal operating state.

### GENERAL SPECIFICATIONS

(+25°C ambient temperature unless otherwise specified)

#### ENVIRONMENTAL SPECIFICATIONS

|                                   | Min                                     | Max  | Units |
|-----------------------------------|-----------------------------------------|------|-------|
| Operating Temperature             | –55                                     | +105 | °C    |
| Storage Temperature               | –55                                     | +125 | °C    |
| Junction Temperature @ 2A         |                                         | +125 | °C    |
| Thermal Resistance $\theta_{JA}$  |                                         | +120 | °C/W  |
| Dielectric Strength               | 1000                                    |      | Vac   |
| Insulation Resistance (@ 500 Vdc) | 10 <sup>9</sup>                         |      | Ohm   |
| Input to Output Capacitance       |                                         | 5    | pF    |
| Shock                             | MIL-STD-202, method 213, cond. F, 1500g |      |       |
| Vibration                         | MIL-STD-202, method 204, cond. F, 100g  |      |       |
| Resistance to Soldering Heat      | MIL STD 202, method 210                 |      |       |
| Solderability                     | MIL STD 202, method 208                 |      |       |
| Thermal Shock                     | MIL STD 202, method 107                 |      |       |

### MECHANICAL SPECIFICATIONS


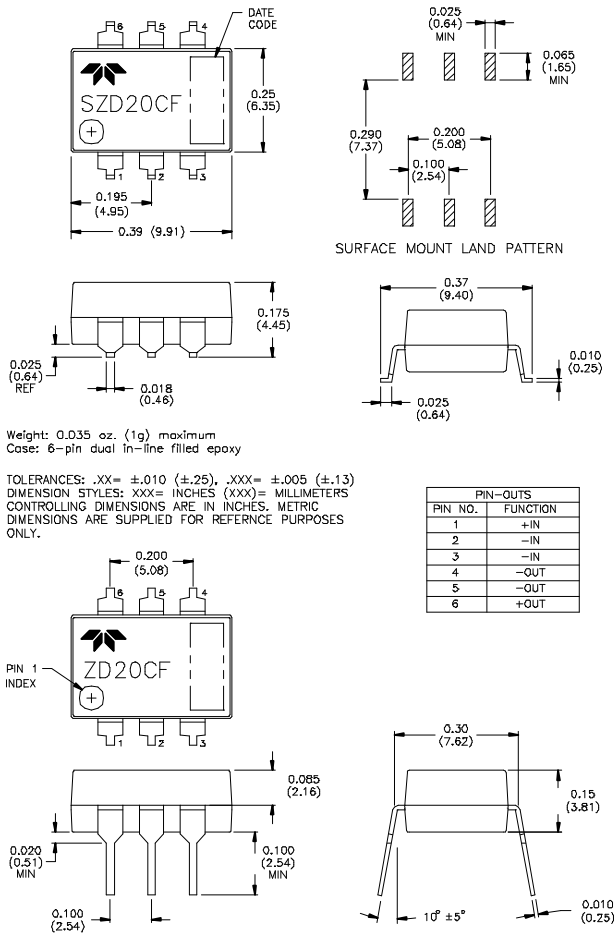


Figure 1

### TYPICAL WIRING DIAGRAM

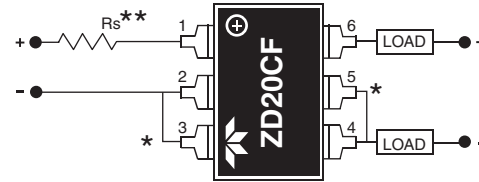

\*Shorted internally  
\*\*Series resistor required to limit input current to 20mA maximum

Figure 2

### CONTROL CURRENT VS. INPUT VOLTAGE

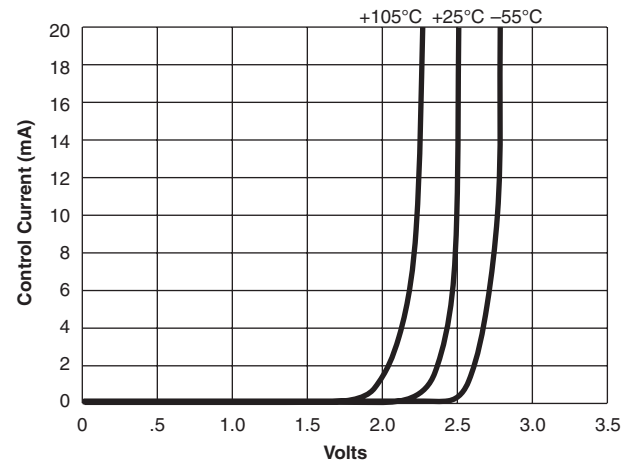


Figure 3

### TYPICAL TURN-ON TIME VS. INPUT CURRENT

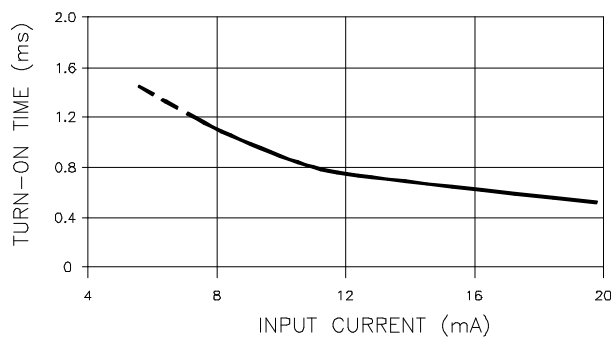


Figure 4

### LOAD CURRENT VS. AMBIENT TEMPERATURE

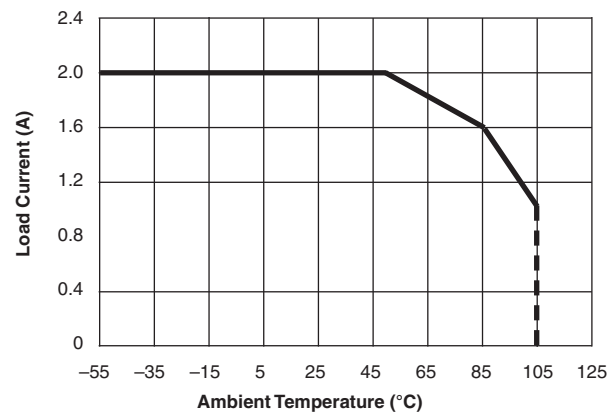


Figure 5

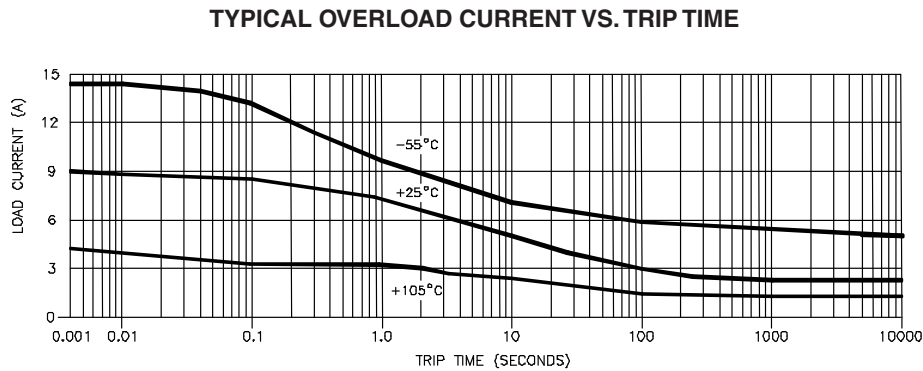


Figure 6

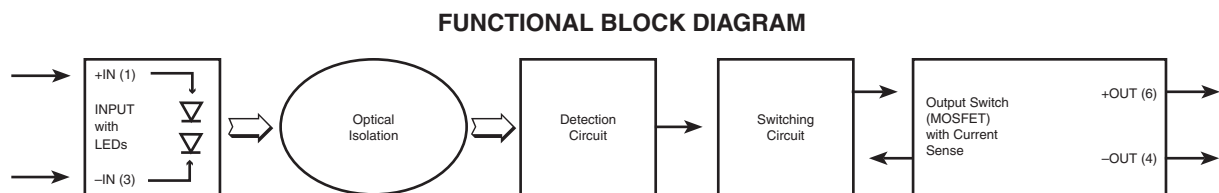


Figure 7

**NOTES:**

1. The ZD20CF relay's input current should be limited to between 8 and 20mA. An external resistor whose value  $= (V_{IN} - 2.5 \text{ volts}) \div 0.012$  Amps is a good choice for limiting input current.
2. Relay input transitions should be less than 1.0 millisecond.
3. Loads may be attached to either the positive or negative output terminal.
4. Maximum load current ratings are with the relay in free air and soldered to a printed circuit board.
5. Timing is measured from the input current transition to the 10% or 90% points on the output voltage transition.
6. Overload conditions (including shorted loads) are specified for load supply voltages to 33 Vdc maximum.
7. For through-hole-PCB-solder-attaching ZD20CF series relays, the wave-solder or solder pot operations are limited to +260°C maximum for 10 seconds, maximum.
8. For surface-mount-solder-attaching SZD20CF series relays, in IR heating or convection heating systems, the component temperature is limited to +235°C maximum for 10 seconds maximum.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331