

# Series 804 Push-Pull Mighty Mouse Protective Cover Ordering Information

667-202 and 809-198



Series 804



## 807-198 Plug Cover

See next page for ordering info






**Protect Connectors From Damage** – Machined aluminum covers prevent ingress of contamination and water.

**Stainless Steel Fittings and Rings** – Choose small diameter eye fittings for panel attachment. Larger rings fit under the jam nut or over cable jackets. Split rings can be installed on fully assembled cables.

**Polyurethane-Coated SST Wire Rope** offers high strength, excellent abrasion resistance and good flexibility. Or, choose Teflon® jacket for high temperature exposure.

**Braided Nylon Rope** provides excellent flexibility and good abrasion resistance, and can be ordered with slip knot fittings for easy installation on any size cable.

## HOW TO ORDER 667-202 RECEPTACLE COVERS

| Sample Part Number                                                                                                                                           |                                                                            |            |                                                |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|------------|------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| 667-202                                                                                                                                                      | M                                                                          | 9          | H                                              | 6                                                                                                  | -14                                                                                                | R                                                                                                                                                                                                                                                                               |                                                                                                                              |
| Series                                                                                                                                                       | Shell Material / Finish                                                    | Shell Size | Attachment Type                                | Attachment Length in Inches                                                                        | Ring Type and Dia. Code                                                                            |                                                                                                                                                                                                                                                                                 | Pull Ring Option                                                                                                             |
| <br><b>667-202</b><br>Protective Cover for use with Receptacle Connectors | <b>C</b><br>Aluminum / Black Anodize<br>(Non-Conductive)<br>RoHS Compliant | <b>5</b>   | <b>G</b><br>Nylon Rope                         | Omit for attachment Type <b>N</b> (No Attachment)<br><b>Example</b><br>"-6" equals six inch length | Omit for attachment Types <b>N</b> (No Attachment) and <b>SK</b> (Slip Knot)                       |                                                                                                                                                                                                                                                                                 | Omit for None                                                                                                                |
|                                                                                                                                                              | <b>M</b><br>Aluminum / Electroless Nickel<br>RoHS Compliant                | <b>6</b>   | <b>H</b><br>SST Wire Rope, Teflon® Jacket      |                                                                                                    | <br>Small Ring | <b>-01</b> – .126 (3.20) I.D.<br><b>-02</b> – .145 (3.68) I.D.<br><b>-04</b> – .188 (4.78) I.D.<br><b>-06</b> – .197 (5.00) I.D.                                                                                                                                                | <b>R</b><br>Supplied With Pull Ring<br> |
|                                                                                                                                                              | <b>NF</b><br>Aluminum / Cadmium with Olive Drab Chromate                   | <b>7</b>   | <b>N</b><br>No Attachment                      |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |
|                                                                                                                                                              | <b>ZN</b><br>Aluminum / Zinc-Nickel with Olive Drab Chromate               | <b>8</b>   | <b>S</b><br>SST Sash Chain                     |                                                                                                    | <br>Large Ring | <b>-14</b> – .385 (9.78) I.D.<br><b>-15</b> – .445 (11.30) I.D.<br><b>-16</b> – .570 (14.48) I.D.<br><b>-17</b> – .635 (16.13) I.D.<br><b>-18</b> – .695 (17.65) I.D.<br><b>-19</b> – .885 (22.48) I.D.<br><b>-20</b> – 1.070 (27.17) I.D.<br><b>-21</b> – 1.135 (28.83) I.D.   |                                                                                                                              |
|                                                                                                                                                              | <b>ZNU</b><br>Aluminum / Zinc-Nickel with Black Chromate                   | <b>9</b>   | <b>SK</b><br>Nylon Rope With Slip Knot         |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |
|                                                                                                                                                              | <b>MT</b><br>Aluminum / Nickel-PTFE<br>RoHS Compliant                      | <b>10</b>  | <b>T</b><br>SST Wire Rope, No Jacket           |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |
|                                                                                                                                                              | <b>Z1</b><br>Stainless Steel / Passivated<br>RoHS Compliant                | <b>12</b>  | <b>U</b><br>SST Wire Rope, Polyurethane Jacket |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |
|                                                                                                                                                              |                                                                            | <b>14</b>  | "SST" = Stainless Steel                        |                                                                                                    | <br>Split Ring | <b>-50</b> – .420 (10.67) I.D.<br><b>-52</b> – .480 (12.19) I.D.<br><b>-54</b> – .635 (16.13) I.D.<br><b>-56</b> – .745 (18.92) I.D.<br><b>-58</b> – .885 (22.48) I.D.<br><b>-60</b> – 1.010 (25.65) I.D.<br><b>-64</b> – 1.125 (28.58) I.D.<br><b>-68</b> – 1.345 (34.16) I.D. |                                                                                                                              |
|                                                                                                                                                              |                                                                            |            |                                                |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |
|                                                                                                                                                              |                                                                            |            |                                                |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |
|                                                                                                                                                              |                                                                            |            |                                                |                                                                                                    |                                                                                                    |                                                                                                                                                                                                                                                                                 |                                                                                                                              |

Dimensions in inches (millimeters) and are subject to change without notice.

© 2010 Glenair, Inc.

CAGE Code 06324

Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912

www.glenair.com

G-25



E-Mail: sales@glenair.com

Rev. 01-JANUARY-2010

# Series 804 Push-Pull Mighty Mouse Protective Cover Ordering Information

## 809-198 Plug Covers

### HOW TO ORDER 809-198 PLUG COVERS

| Sample Part Number                                                                                                                                                    |                                                                                                                                                                                                                                                                           |                                                                                                               |                                                                                                                                                                                                                                                                                                                                         |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 809-198                                                                                                                                                               | M                                                                                                                                                                                                                                                                         | 12                                                                                                            | H                                                                                                                                                                                                                                                                                                                                       | 6                                                                                                           | -14                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                   |
| Series                                                                                                                                                                | Shell Material / Finish                                                                                                                                                                                                                                                   | Shell Size                                                                                                    | Attachment Type                                                                                                                                                                                                                                                                                                                         | Attachment Length in Inches                                                                                 | Ring Type and Dia. Code                                                                                                                                                                                                                                                                                                                                                                                                                     | Shell Key Position                                                                                                                                                |
|  <p><b>809-198</b><br/>Protective<br/>Cover for<br/>use with Plug<br/>Connectors</p> | <p><b>C</b><br/>Aluminum / Black Anodize<br/>(Non-Conductive)<br/>RoHS Compliant</p>                                                                                                                                                                                      | <p><b>5</b><br/><b>6</b><br/><b>7</b><br/><b>8</b><br/><b>9</b><br/><b>10</b><br/><b>12</b><br/><b>14</b></p> | <p><b>G</b><br/>Nylon Rope</p> <p><b>H</b><br/>SST Wire Rope, Teflon® Jacket</p> <p><b>N</b><br/>No Attachment</p> <p><b>S</b><br/>SST Sash Chain</p> <p><b>SK</b><br/>Nylon Rope With Slip Knot</p> <p><b>T</b><br/>SST Wire Rope, No Jacket</p> <p><b>U</b><br/>SST Wire Rope, Polyurethane Jacket</p> <p>"SST" = Stainless Steel</p> | <p>Omit for attachment Type <b>N</b> (No Attachment)<br/><b>Example</b><br/>"-6" equals six inch length</p> | <p>Omit for attachment Types <b>N</b> (No Attachment) and <b>SK</b> (Slip Knot)</p> <div>  <p>Small Ring</p> </div> <div>  <p>Large Ring</p> </div> <div>  <p>Split Ring</p> </div> | <p><b>Omit</b><br/>for Single Master Key</p> <p><b>A</b><br/>Pos. A (Normal)</p> <p><b>B</b><br/>Pos. B</p> <p><b>C</b><br/>Pos. C</p> <p><b>D</b><br/>Pos. D</p> |
|                                                                                                                                                                       | <p><b>M</b><br/>Aluminum / Electroless Nickel<br/>RoHS Compliant</p>                                                                                                                                                                                                      |                                                                                                               |                                                                                                                                                                                                                                                                                                                                         |                                                                                                             | <p><b>-01</b> - .126 (3.20) I.D.<br/><b>-02</b> - .145 (3.68) I.D.<br/><b>-04</b> - .188 (4.78) I.D.<br/><b>-06</b> - .197 (5.00) I.D.</p>                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                   |
|                                                                                                                                                                       | <p><b>NF</b><br/>Aluminum / Cadmium with Olive Drab Chromate</p>                                                                                                                                                                                                          |                                                                                                               |                                                                                                                                                                                                                                                                                                                                         |                                                                                                             | <p><b>-08</b> - .510 (13.0) I.D.<br/><b>-10</b> - .766 (19.4) I.D.<br/><b>-12</b> - 1.015 (25.8) I.D.<br/><b>-14</b> - .385 (9.78) I.D.<br/><b>-15</b> - .445 (11.30) I.D.<br/><b>-16</b> - .570 (14.48) I.D.<br/><b>-17</b> - .635 (16.13) I.D.<br/><b>-18</b> - .695 (17.65) I.D.<br/><b>-19</b> - .885 (22.48) I.D.<br/><b>-20</b> - 1.070 (27.17) I.D.<br/><b>-21</b> - 1.135 (28.83) I.D.<br/><b>-25</b> - .820 (20.8) I.D.</p>        |                                                                                                                                                                   |
|                                                                                                                                                                       | <p><b>ZN</b><br/>Aluminum / Zinc-Nickel with Olive Drab Chromate</p> <p><b>ZNU</b><br/>Aluminum / Zinc-Nickel with Black Chromate</p> <p><b>MT</b><br/>Aluminum / Nickel-PTFE<br/>RoHS Compliant</p> <p><b>Z1</b><br/>Stainless Steel / Passivated<br/>RoHS Compliant</p> |                                                                                                               |                                                                                                                                                                                                                                                                                                                                         |                                                                                                             | <p><b>-50</b> - .420 (10.67) I.D.<br/><b>-52</b> - .480 (12.19) I.D.<br/><b>-54</b> - .635 (16.13) I.D.<br/><b>-56</b> - .745 (18.92) I.D.<br/><b>-58</b> - .885 (22.48) I.D.<br/><b>-60</b> - 1.010 (25.65) I.D.<br/><b>-64</b> - 1.125 (28.58) I.D.<br/><b>-68</b> - 1.345 (34.16) I.D.</p>                                                                                                                                               |                                                                                                                                                                   |

Dimensions in inches (millimeters) and are subject to change without notice.

© 2010 Glenair, Inc.

CAGE Code 06324

Printed in U.S.A.

**GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912**

www.glenair.com

**G-26**

E-Mail: sales@glenair.com


Rev. 23-FEBRUARY-2011


# Series 804 Push-Pull Mighty Mouse Protective Receptacle Cover Information 667-202




Series 804


## Attaching a 667-202 Receptacle Cover to a Front Panel Mounted Jam Nut Receptacle

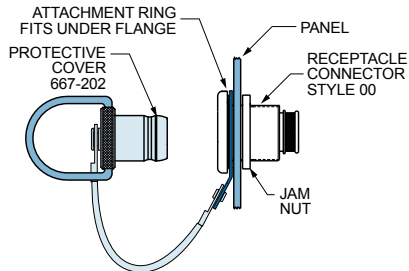


|                                                                                                 | Dia. Code | Shell Size | Conn. Thread Ref | Ring I.D. |      | Ring O.D. |      |
|-------------------------------------------------------------------------------------------------|-----------|------------|------------------|-----------|------|-----------|------|
|                                                                                                 |           |            |                  | In.       | mm.  | In.       | mm.  |
| <br>Solid Ring | 08        | 5          | .5000-32         | .510      | 13.0 | .620      | 15.7 |
|                                                                                                 | 16        | 6          | .5625-28         | .570      | 14.5 | .690      | 17.5 |
|                                                                                                 | 18        | 7, 8       | .6875-28         | .695      | 17.7 | .820      | 20.8 |
|                                                                                                 | 10        | 9          | .7500-28         | .766      | 19.4 | .890      | 22.6 |
|                                                                                                 | 25        | 10         | .8125-28         | .820      | 20.8 | .940      | 23.9 |
|                                                                                                 | 12        | 12         | 1.000-28         | 1.015     | 25.8 | 1.200     | 30.5 |
|                                                                                                 | 20        | 14         | 1.062-20         | 1.070     | 27.2 | 1.200     | 30.5 |
|                                                                                                 | 21        | 15         | 1.125-28         | 1.135     | 28.8 | 1.250     | 31.8 |

## Attaching a 667-202 Receptacle Cover to a Rear Panel Mounted Jam Nut Receptacle

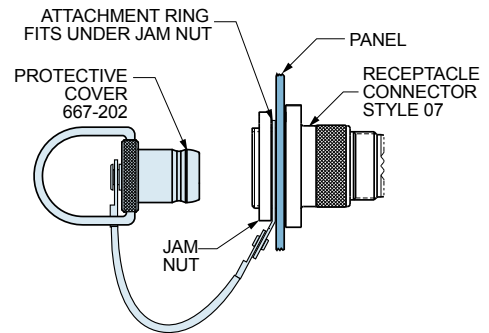

|                                                                                                  | Dia. Code | Shell Size | Conn. Thread Ref | Ring I.D. |       | Ring O.D. |       |
|--------------------------------------------------------------------------------------------------|-----------|------------|------------------|-----------|-------|-----------|-------|
|                                                                                                  |           |            |                  | In.       | mm.   | In.       | mm.   |
| <br>Solid Ring | 15        | 5          | .4375-32         | ±.010     | ±0.25 | ±.015     | ±0.38 |
|                                                                                                  | 08        | 6          | .5000-32         | .445      | 11.3  | .570      | 14.5  |
|                                                                                                  | 17        | 7, 8       | .6250-28         | .510      | 13.0  | .620      | 15.7  |
|                                                                                                  | 18        | 9          | .6250-28         | .635      | 16.1  | .760      | 19.3  |
|                                                                                                  | 10        | 10         | .6875-28         | .635      | 16.1  | .760      | 19.3  |
|                                                                                                  | 18        | 9          | .6875-28         | .695      | 17.7  | .820      | 20.8  |
|                                                                                                  | 10        | 10         | .7500-28         | .766      | 19.4  | .890      | 22.6  |
|                                                                                                  | 19        | 12         | .7500-28         | .766      | 19.4  | .890      | 22.6  |
|                                                                                                  | 12        | 14         | .8750-28         | .885      | 22.5  | 1.010     | 25.7  |
|                                                                                                  |           |            | 1.000-28         | 1.015     | 25.8  | 1.200     | 30.5  |

## Attaching a 667-202 Receptacle Cover to a Panel With a Screw

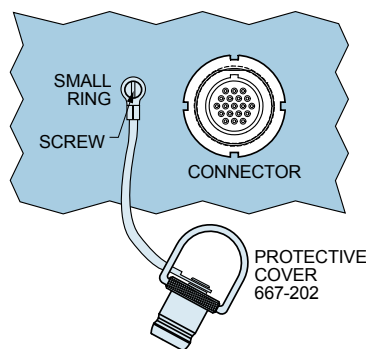

|                                                                                                                                                           | Dia. Code | Screw Size | Ring I.D. |       | Ring O.D. |      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|-----------|-------|-----------|------|
|                                                                                                                                                           |           |            | In.       | mm.   | In.       | mm.  |
| <br>Small Ring for Attaching Receptacle Covers to a Panel with a Screw | 01        | #4, M3     | ±.005     | ±0.13 | Max.      | Max. |
|                                                                                                                                                           | 02        | #6         | .126      | 3.20  | .31       | 7.9  |
|                                                                                                                                                           | 04        | #8, M4     | .145      | 3.68  | .31       | 7.9  |
|                                                                                                                                                           | 06        | #10        | .188      | 4.78  | .31       | 7.9  |

Dimensions in inches (millimeters) and are subject to change without notice.

CAGE Code 06324

Printed in U.S.A.

© 2010 Glenair, Inc.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912

www.glenair.com

G-27

E-Mail: sales@glenair.com

Rev. 05-MARCH-2011



G



Series 804 Push-Pull Mighty Mouse  
Protective Plug Cover Information  
809-198 and 667-202

Attaching a Cover to a Cable Assembly With a Solid Ring

Install cover onto the back of the connector before overmolding or backshell installation.


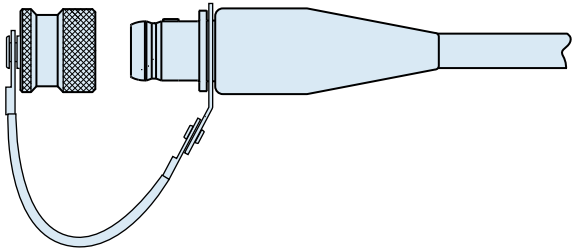


Solid Ring

| Dia.<br>Code | Shell<br>Size | Ring I.D. |       | Ring O.D. |        |
|--------------|---------------|-----------|-------|-----------|--------|
|              |               | In.       | mm.   | In.       | mm.    |
|              |               | ± .010    | ±0.25 | ± .015    | ± 0.38 |
| 14           | 5,6           | .385      | 9.78  | .510      | 12.95  |
| 15           | 7             | .445      | 11.30 | .565      | 14.35  |
| 16           | 8, 9          | .570      | 14.48 | .685      | 17.40  |
| 18           | 10, 12        | .695      | 17.65 | .820      | 20.82  |
| 20           | 14            | 1.070     | 27.17 | 1.195     | 30.35  |

Attaching a Cover to a Cable Using a Split Ring or Slip Knot

Split rings can be installed onto finished cables.

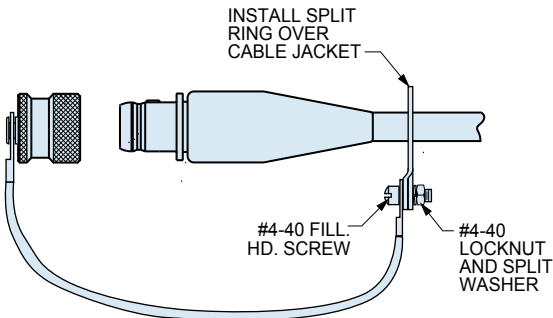


Large Split Ring for  
Attaching Covers to  
Cables

| Dia.<br>Code | Max.<br>Cable<br>Dia. (in.) | Ring Diameter |       |         |       |
|--------------|-----------------------------|---------------|-------|---------|-------|
|              |                             | Min. ID       |       | Max. OD |       |
|              |                             | In.           | mm.   | In.     | mm.   |
| 50           | .410                        | .420          | 10.67 | .580    | 14.73 |
| 52           | .470                        | .480          | 12.19 | .640    | 16.26 |
| 54           | .625                        | .635          | 16.13 | .796    | 20.22 |
| 56           | .735                        | .745          | 18.92 | .905    | 22.99 |
| 58           | .875                        | .885          | 22.48 | 1.046   | 26.57 |
| 60           | 1.000                       | 1.010         | 25.65 | 1.171   | 29.74 |
| 64           | 1.115                       | 1.125         | 28.58 | 1.285   | 32.64 |
| 68           | 1.335                       | 1.345         | 34.16 | 1.505   | 38.23 |


# Series 804 Push-Pull Mighty Mouse Protective Plug and Receptacle Cover Dimensions 809-198 and 667-202



Series 804

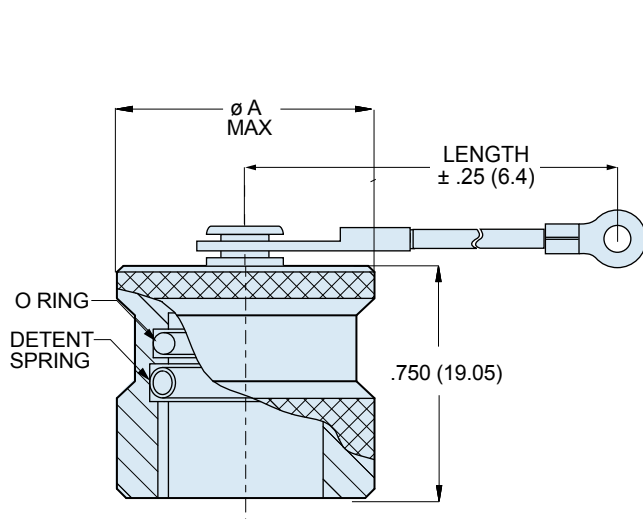

**809-198 Plug Cover**

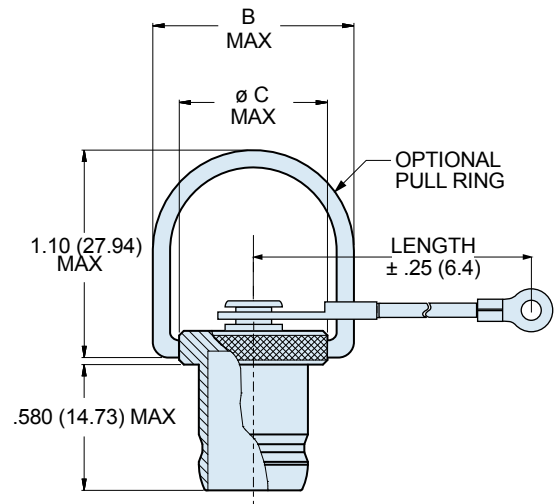

**667-202 Receptacle Cover**

| Shell Size | Ø A Max. |       | Ø B Max. |       | Ø C Max. |       |
|------------|----------|-------|----------|-------|----------|-------|
|            | In       | mm    | In       | mm    | In       | mm    |
| 5          | .496     | 12.60 | .740     | 18.80 | .490     | 12.45 |
| 6          | .540     | 13.72 | .740     | 18.80 | .490     | 12.45 |
| 7          | .645     | 16.38 | .820     | 20.83 | .570     | 14.48 |
| 8          | .665     | 16.89 | .870     | 22.10 | .619     | 15.72 |
| 9          | .720     | 18.29 | .920     | 23.37 | .670     | 17.02 |
| 10         | .790     | 20.07 | 1.030    | 26.16 | .783     | 19.89 |
| 12         | .915     | 23.24 | 1.110    | 28.19 | .860     | 21.84 |
| 14         | 1.040    | 26.42 | 1.230    | 31.24 | .980     | 24.89 |

## MATERIALS AND FINISHES

|                |                                   |
|----------------|-----------------------------------|
| Cover          | Aluminum alloy or stainless steel |
| O-ring         | Fluorosilicone rubber             |
| Wire, Hardware | Stainless steel, passivated       |

## LANYARD OPTIONS



**Nylon Rope**

-55° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter



**Polyurethane Coated Wire Rope**

Black polyurethane over stainless steel rope, -55° to +125°C., very flexible, excellent abrasion resistance, excellent resistance to fuels, .080" (2mm) diameter



**Teflon® Jacketed Wire Rope**

Translucent FEP jacket over stainless steel, -55° to +200°C., fair flexibility, good abrasion resistance, .100" diameter



**Sash Chain**

Stainless steel, #8 chain, .240" (6mm)



**Slip Knot (SK)**  
for Attaching Covers to Cable

55° to +100°C., black, very flexible, very good abrasion resistance, good resistance to fuels, .120" (3mm) diameter. Length includes .5" (13mm) diameter loop.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331